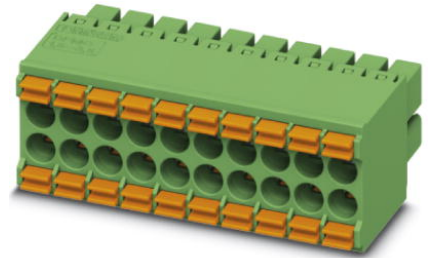



**DFMC 1,5/11-ST-3,5**

Order No.: 1790195

<http://eshop.phoenixcontact.co.uk/phoenix/treeViewClick.do?UID=1790195>

Plug component, Nominal current: 8 A, Rated voltage (III/2): 160 V,  
Number of positions: 11, Pitch: 3.5 mm, Connection method: Spring-  
cage conn., Color: green, Contact surface: Tin

**Commercial data**

|                          |  |
|--------------------------|--|
| EAN                      | <br>4 046356 594349 |
| Note                     | Made-to-order  |
| Pack                     | 50   |
| Customs tariff           | 85366990   |
| Gross weight in pieces   | 11.60 g  |
| Country of Origin        | DE   |
| Catalog page information | Page 174 (CC-2011)   |

**Product notes**

WEEE/RoHS-compliant since:  
08/07/2010



Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

**Technical data****Dimensions / positions**

|                     |          |
|---------------------|----------|
| Length              | 22.65 mm |
| Height              | 13.25 mm |
| Pitch               | 3.5 mm   |
| Dimension a         | 35 mm    |
| Number of positions | 11       |


**Technical data**

|   |                     |
|---|---------------------|
| Range of articles                       | DFMC 1,5/...-ST     |
| Insulating material group               | I                   |
| Rated surge voltage (III/3)             | 2.5 kV              |
| Rated surge voltage (III/2)             | 2.5 kV              |
| Rated surge voltage (II/2)              | 2.5 kV              |
| Rated voltage (III/2)                   | 160 V               |
| Rated voltage (II/2)                    | 250 V               |
| Connection in acc. with standard        | EN-VDE              |
| Nominal current $I_N$                   | 8 A                 |
| Nominal voltage $U_N$                   | 160 V               |
| Nominal cross section                   | 1.5 mm <sup>2</sup> |
| Maximum load current                    | 8 A                 |
| Insulating material                     | PA                  |
| Inflammability class according to UL 94 | V0                  |
| Internal cylindrical gage               | A1                  |
| Stripping length                        | 10 mm               |
| Nominal voltage, UL/CUL Use Group B     | 150 V               |
| Nominal current, UL/CUL Use Group B     | 8 A                 |

**Connection data**

|  |                      |
|--|----------------------|
| Conductor cross section solid min.   | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.   | 1.5 mm <sup>2</sup>  |
| Conductor cross section stranded min.                                      | 0.2 mm <sup>2</sup>  |
| Conductor cross section stranded max.                                      | 1.5 mm <sup>2</sup>  |
| Conductor cross section stranded, with ferrule without plastic sleeve min. | 0.25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule without plastic sleeve max. | 1.5 mm <sup>2</sup>  |
| Conductor cross section stranded, with ferrule with plastic sleeve min.    | 0.25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve max.    | 0.75 mm <sup>2</sup> |
| Conductor cross section AWG/kcmil min.                                     | 24                   |
| Conductor cross section AWG/kcmil max                                      | 16                   |
| Minimum AWG according to UL/CUL  | 16                   |
| Maximum AWG according to UL/CUL  | 24                   |

## Certificates



Certification


cULus Recognized

Certifications applied for:

Certification Ex:


## Drawings

Diagram

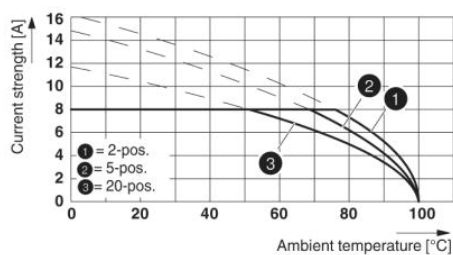

Type: DFMC 1,5/...-ST-3,5 with DMC 1,5/...-G1-3,5 P20 THR

Dimensioned drawing

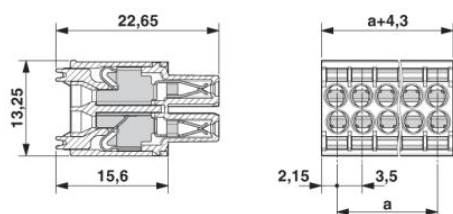

**Address**

PHOENIX CONTACT Ltd  
Halesfield 13  
Telford / Shropshire / TF7 4PG,England  
Phone 01952 681 700  
Fax 01952 681 799  
<http://www.phoenixcontact.co.uk>



Phoenix Contact Ltd.  
Technical modifications reserved;

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [phoenix contact manufacturer](#):*

Other Similar products are found below :

[1203259](#) [3240366](#) [1893300](#) [2800744](#) [2867076](#) [3006564](#) [2800741](#) [5146480](#) [1582539](#) [1623633](#) [1507793](#) [3025587](#) [3069708](#) [1582223](#)  
[1431461](#) [1586976](#) [0311647](#) [1460160](#) [1771338](#) [3048387](#) [2814605](#) [0309086](#) [1513716](#) [3035684](#) [5451417](#) [0202219](#) [1647747](#) [1730667](#)  
[1709267](#) [5449018](#) [0311634](#) [1730696](#) [3034057](#) [0311579](#) [1730683](#) [0719032](#) [5449843](#) [3240098](#) [0311566](#) [0201391](#) [CRIMPFOX 16 S](#)  
[CRIMPSET 25](#) [7001438](#) [ETD-BL-1T-F-300S](#) [MCR-1CLP-I-I-00](#) [MCR-4CLP-I-I-00](#) [MCR-DAC 8-I- 4-BUS](#) [FL EPA WMS](#) [FLK 50/EZ-DR/](#)  
[400/KONFEK/S](#) [FLS PB M12 DO 8 M12-2A](#)