


## ■ Features

- Low saturation voltage.  $V_{CE(sat)} = -0.35V(\text{Max.})$  at  $I_C / I_B = -1A / -50mA$ .
- Excellent DC current gain characteristics.
- Complements the 2SA1797 and 2SC4672.

## SOT-89

1. BASE
2. COLLECTOR
3. EMITTER

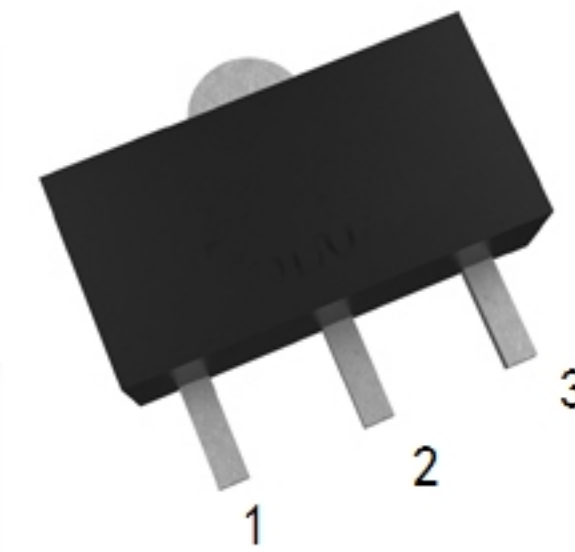

## ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector-emitter Voltage	$V_{CEO}$	-50	V
Collector-base Voltage	$V_{CBO}$	-50	V
Emitter-base Voltage	$V_{EBO}$	-6	V
Collector current	$I_C$	-1.5	A
Collector power dissipation	$P_C$	0.5	W
Junction temperature	$T_j$	150	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +150	$^\circ\text{C}$

## ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Collector-emitter breakdown voltage	$BV_{CEO}$	$I_C = -1mA$	-50			V
Collector-base breakdown voltae	$BV_{CBO}$	$I_C = -50 \mu A$	-50			V
Emitter-base breakdown voltage	$BV_{EBO}$	$I_E = -50 \mu A$	-6			V
Collector cutoff current	$I_{CBO}$	$V_{CB} = -50V$			-0.1	$\mu A$
Emitter cutoff current	$I_{EBO}$	$V_{EB} = -5V$			-0.1	$\mu A$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -1A, I_B = -50mA$		-0.15	-0.35	V
DC current transfer ratio	$h_{FE}$	$V_{CE} = -2V, I_C = -0.5A$	82		390	
Transition frequency	$f_T$	$V_{CE} = -2V, I_E = 0.5A, f = 100MHz$		200		MHz
Output Capacitance	$C_{ob}$	$V_{CB} = -10V, I_E = 0A, f = 1MHz$		36		pF

## ■ $h_{FE}$ Classification

Marking	AG		
	P	Q	R
$h_{FE}$	82~180	120~270	180~390

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Shikues manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)  
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)