


● Features

Large collector power dissipation PC

Mini type package, allowing downsizing of the equipment and automatic insertion through the tape packing and the magazine packing

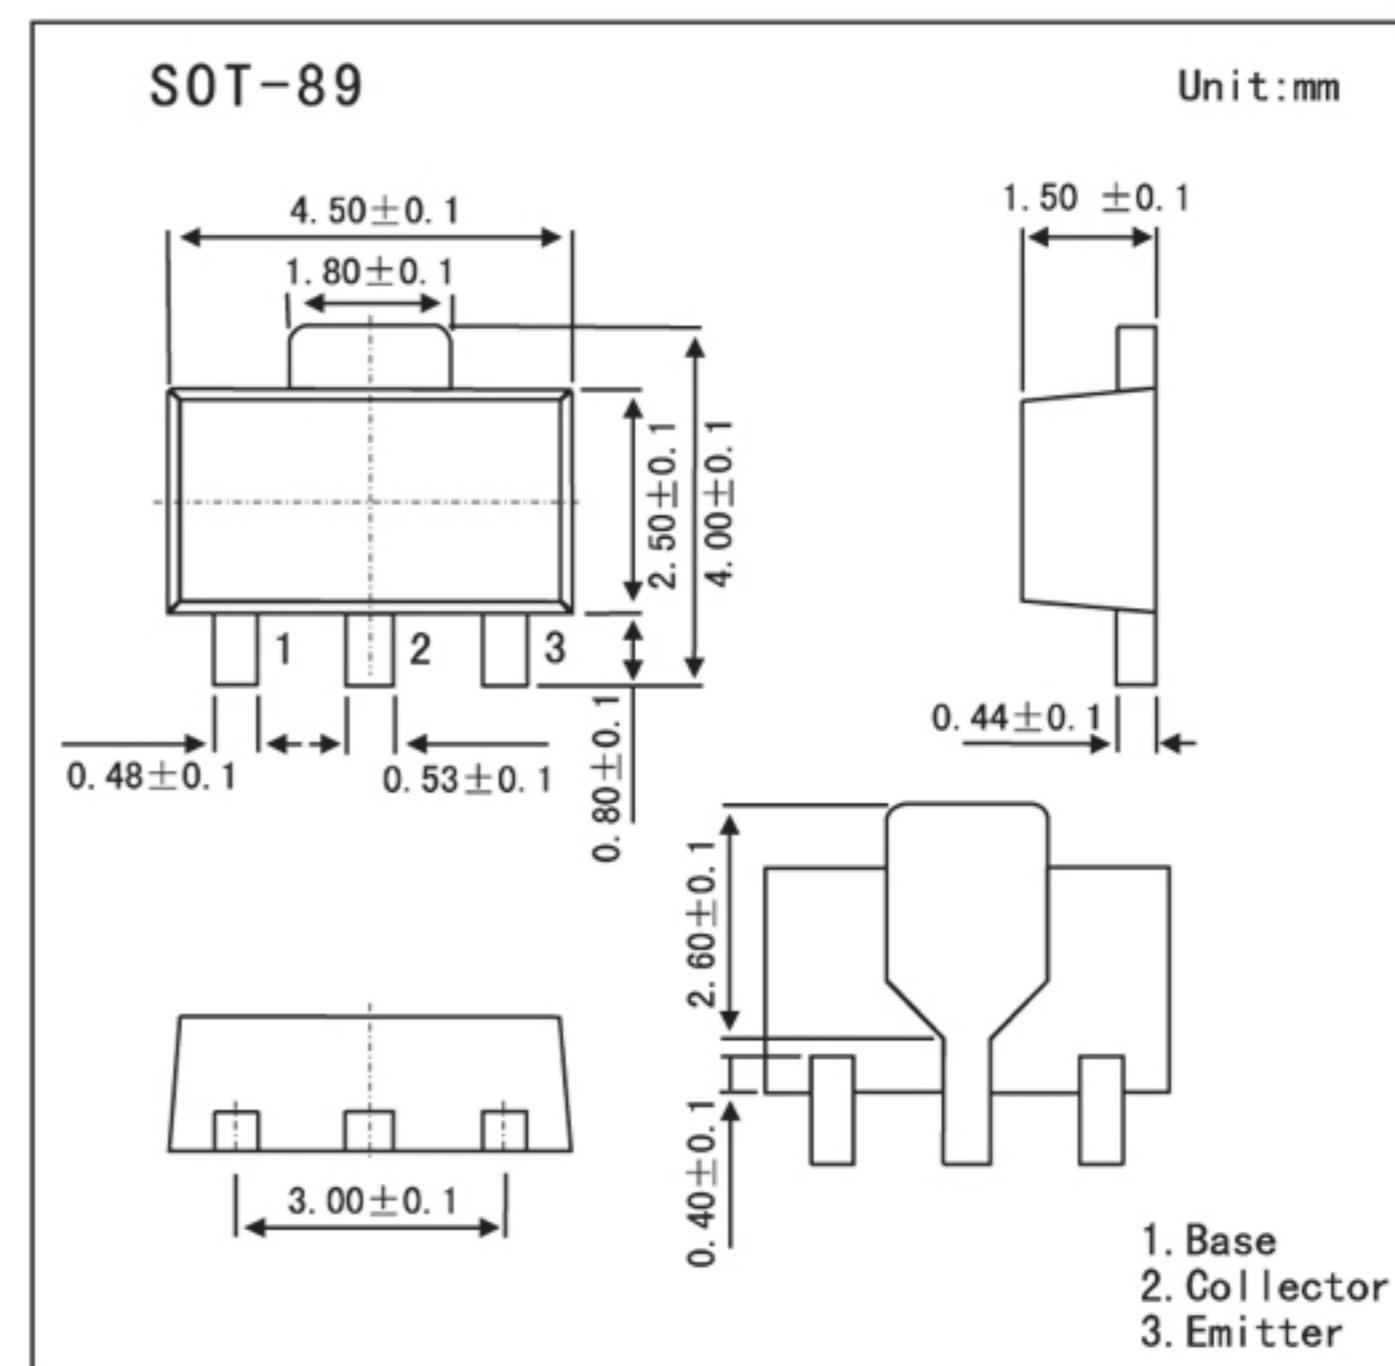

● Absolute Maximum Ratings Ta = 25°C

Parameter		Symbol	Rating	Unit
Collector-base voltage 2SB766 2SB766A		V _{CBO}	-30	V
			-60	
Collector-emitter voltage 2SB766 2SB766A		V _{C EO}	-25	V
			-50	
Emitter-base voltage		V _{EBO}	-5	V
Collector current		I _C	-1	A
Peak collector current		I _{CP}	-1.5	A
Collector power dissipation		P _C	-1	W
Junction temperature		T _j	150	°C
Storage temperature		T _{stg}	-55 to +150	°C

● Electrical Characteristics Ta = 25°C

Parameter		Symbol	Testconditons	Min	Typ	Max	Unit
Collector-base voltage	2SB766	V _{CBO}	I _c = -10 µA, I _E = 0	-30			V
	2SB766A			-60			
Collector-emitter voltage	2SB766	V _{CEO}	I _c = -2 mA, I _B = 0	-25			V
	2SB766A			-50			
Emitter-base voltage		V _{EBO}	I _E = -10µA, I _c = 0	-5			V
Collector-base cutoff current		I _{CBO}	V _{CB} = -20 V, I _E = 0			-0.1	nA
Forward current transfer ratio		h _{FE}	V _{CE} = -10 V, I _c = -500 mA	85		340	
			V _{CE} = -5 V, I _c = -1 A	50			
Collector-emitter saturation voltage		V _{CE(sat)}	I _c = -500 mA, I _B = -50 mA		-0.2	-0.4	V
Base-emitter saturation voltage		V _{BE(sat)}	I _c = -500 mA, I _B = -50 mA		-0.85	-1.2	V
Transition frequency		f _T	V _{CB} = -10 V, I _E = 50 mA, f = 200 MHz		200		MHz
Collector output capacitance		C _{ob}	V _{CB} = -10 V, I _E = 0, f = 1 MHz		20	30	pF

● h_{FE} Classification

2SB766(A)/2SB766A(B)			
Rank	Q	R	S
h _{FE}	85~170	120~240	17~340

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Shikues manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)