

Surface Mount Schottky Rectifier
Reverse Voltage - 40V
Forward Current - 1.0A

FEATURES


- Heatsink structure
- Metal silicon junction, majority carrier conduction
- Super Low VF Schottky barrier diodes
- For surface mounted applications
- Low power loss, high efficiency
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA

- Case: SOD-323HE
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 5.4mg/0.00019oz

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

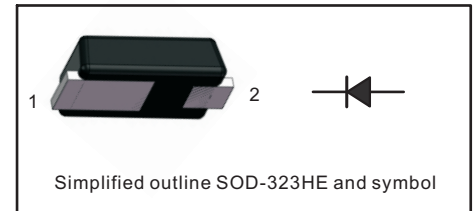

Maximum Ratings (TA = 25 °C unless otherwise noted)

Parameter	Symbols	B5819WSE	Units
Maximum repetitive peak reverse voltage	V_{RRM}	40	V
Maximum RMS voltage	V_{RMS}	28	V
Maximum DC blocking voltage	V_{DC}	40	V
Maximum average forward rectified current	$I_{F(AV)}$	1.0	A
Peak forward surge current 8.3 ms single half sinewave superimposed on rated load	I_{FSM}	15	A
Operating junction temperature range	T_j	- 55 to + 125	°C
Storage temperature range	T_{stg}	- 55 to + 150	°C

Electrical Characteristics (TA = 25 °C unless otherwise noted)

Parameter	Test Conditions	Symbols	B5819WSE	Units
Minimum Breakdown voltage	$T_a = 25^{\circ}C, I_R = 1mA$	V_{BR}	40	V
Maximum instantaneous forward voltage	$I_F = 1A, T_a = 25^{\circ}C$	V_F	0.60	V
Maximum DC reverse current at rated DC blocking voltage	$T_a = 25^{\circ}C$	I_R	50	uA
Typical junction capacitance	4.0 V, 1 MHz	C_J	60	pF

Fig.1 Forward Current Derating Curve

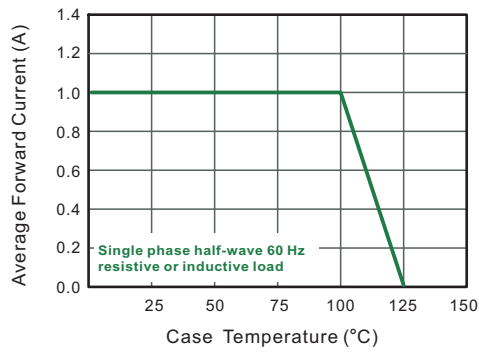


Fig.2 Typical Reverse Characteristics

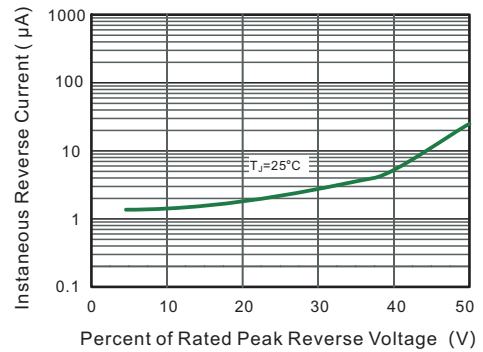


Fig.3 Typical Forward Characteristic

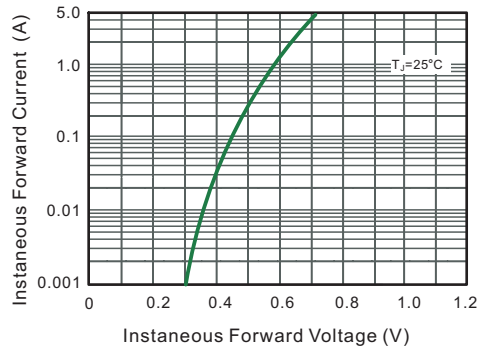


Fig.4 Typical Junction Capacitance


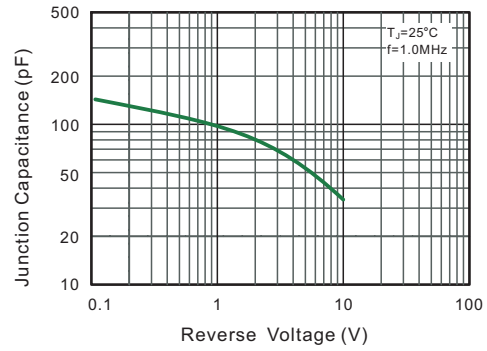



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

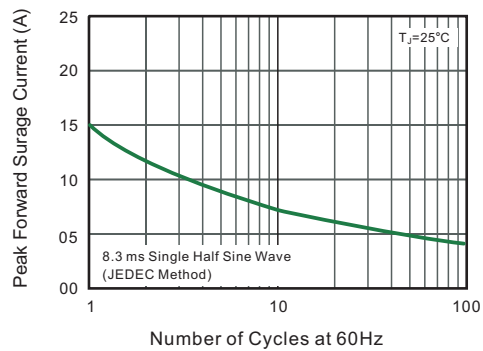


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-323HE

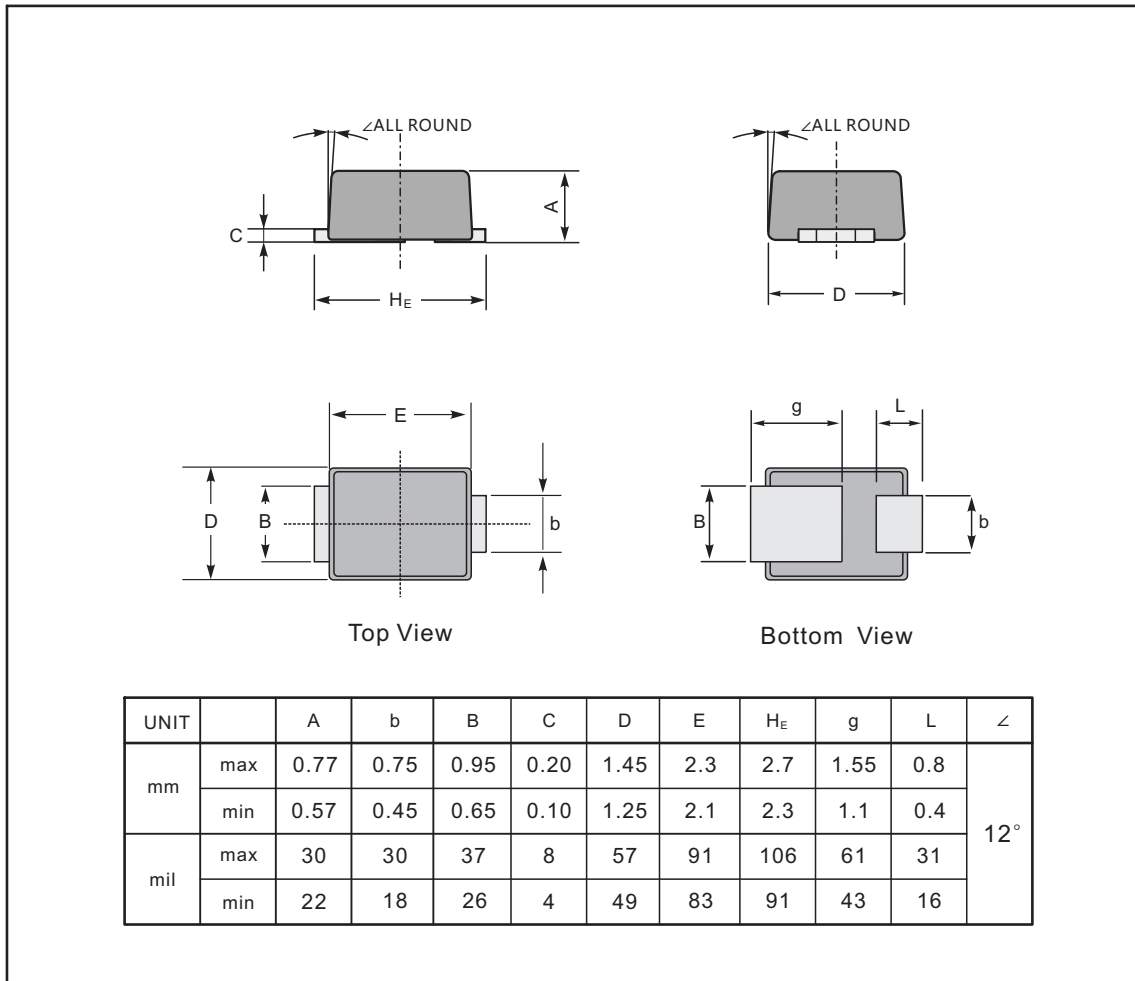

The recommended mounting pad size

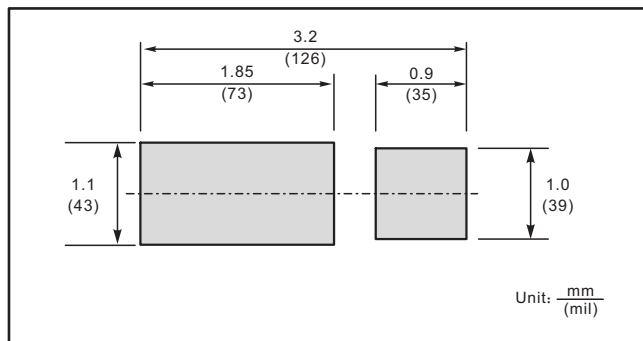

Marking

Type number	Marking code
B5819WSE	SL

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Shikues](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR1545CT](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAT 54-02LRH E6327](#)
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SK310-T](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [GA01SHT18](#)
[CRS10I30A\(TE85L,QM](#) [MA4E2501L-1290](#) [MBRA140TRPBF](#) [MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#)
[SB007-03C-TB-E](#) [SK33B-TP](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [CDBQC0240LR-HF](#) [ACDBA260LR-HF](#)
[ACDBA1100-HF](#) [MA4E2502L-1246](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [CRS08TE85LQM](#) [PMAD1108-LF](#) [B120Q-13-F](#) [1N5819T-G](#)
[B0530WSQ-7-F](#) [PDS1040Q-13](#) [B160BQ-13-F](#) [SDM05U20CSP-7](#) [B140S1F-7](#)