

## ● FEATURES

- High current rectifier Schottky diode with low VF drop
- Low voltage, low inductance
- For power supply
- For detection and step-up-conversion



## MARKING: 5

### ● Maximum Ratings and Electrical Characteristics, Single Diode @T<sub>A</sub>=25°C


Parameter	Symbol	Limits	Unit
Non-Repetitive Peak reverse voltage	V <sub>RM</sub>	10	V
Forward current	I <sub>F</sub>	3	A
Forward surge Current t <sub>p</sub> =10ms	I <sub>FSM</sub>	5	A
Power dissipation T <sub>C</sub> =25°C	P <sub>tot</sub>	350	mW
Junction temperature	T <sub>J</sub>	150	°C
Storage temperature	T <sub>STG</sub>	-65~+150	°C

### ● Electrical Ratings @T<sub>A</sub>=25°C


Parameter	Symbol	Min.	Typ	Max.	Unit	Conditions
Forward voltage	V <sub>F</sub>			300	mV	I <sub>F</sub> =10mA
				380		I <sub>F</sub> =100mA
				500		I <sub>F</sub> =500mA
				600		I <sub>F</sub> =1000mA
Reverse current	I <sub>R</sub>			15	μA	V <sub>R</sub> =5V
				25		V <sub>R</sub> =8V
Capacitance between terminals	C <sub>T</sub>			30	pF	V <sub>R</sub> =5V, f=1MHz

Reverse current  $I_R = f(V_R)$

$T_A = \text{Parameter}$

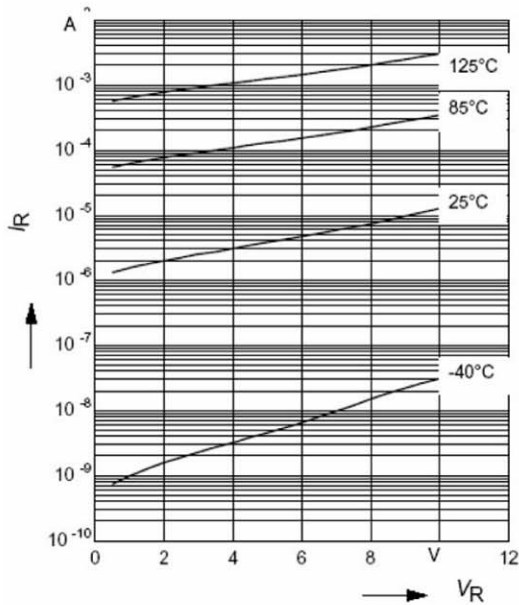


Forward current  $I_F = f(T_S)$

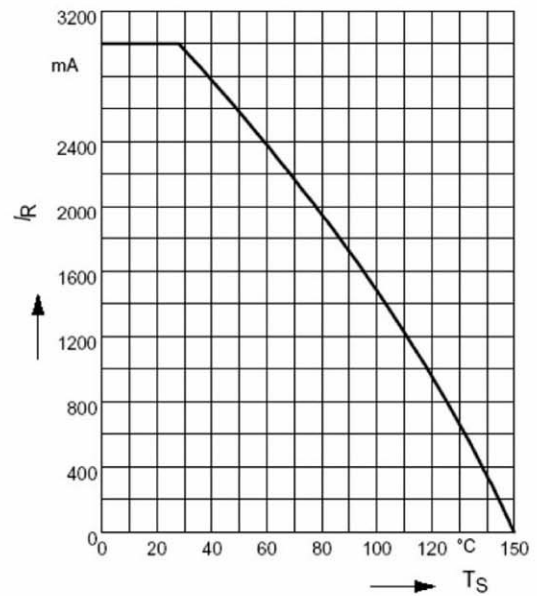


Forward current  $I_F = f(V_F)$

$T_A = \text{Parameter}$

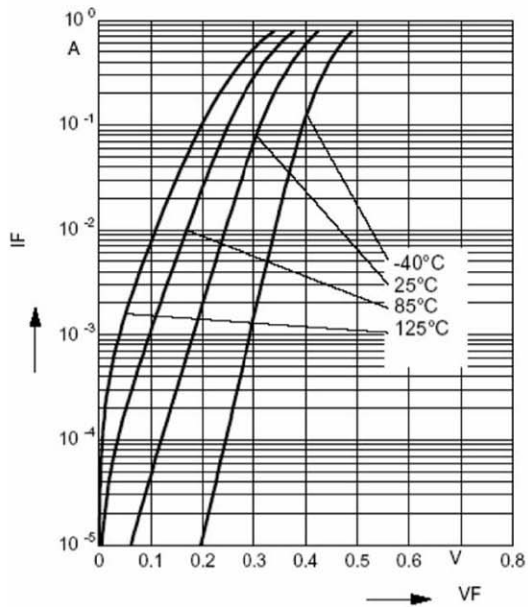


Permissible Pulse Load

$I_{Fmax} / I_{FDC} = f(t_p)$

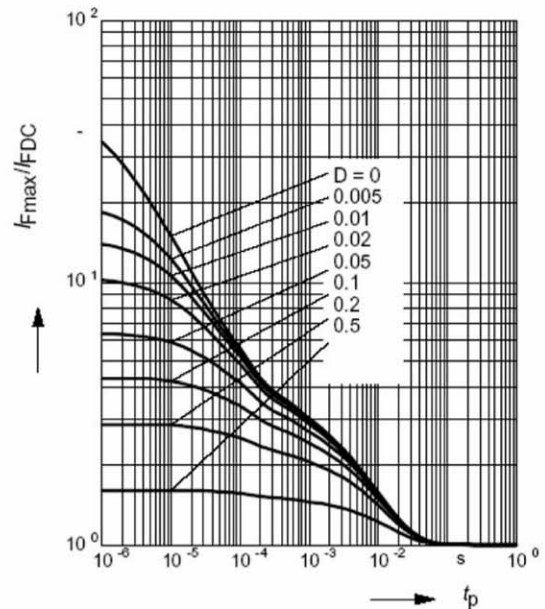


Permissible Puls Load  $R_{thJS} = f(t_p)$

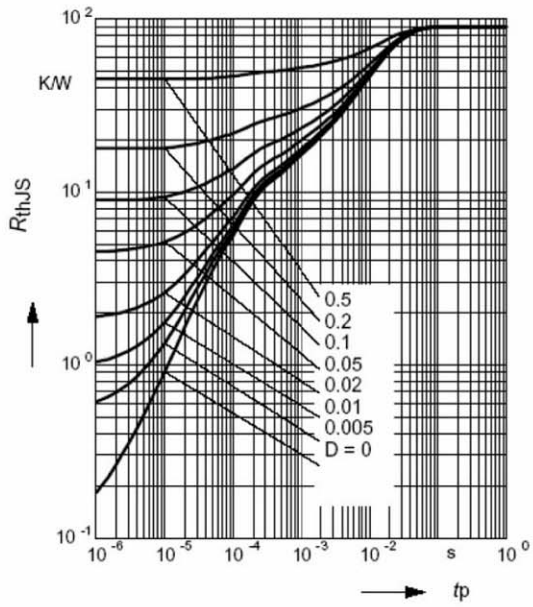


## PACKAGE OUTLINE

Plastic surface mounted package

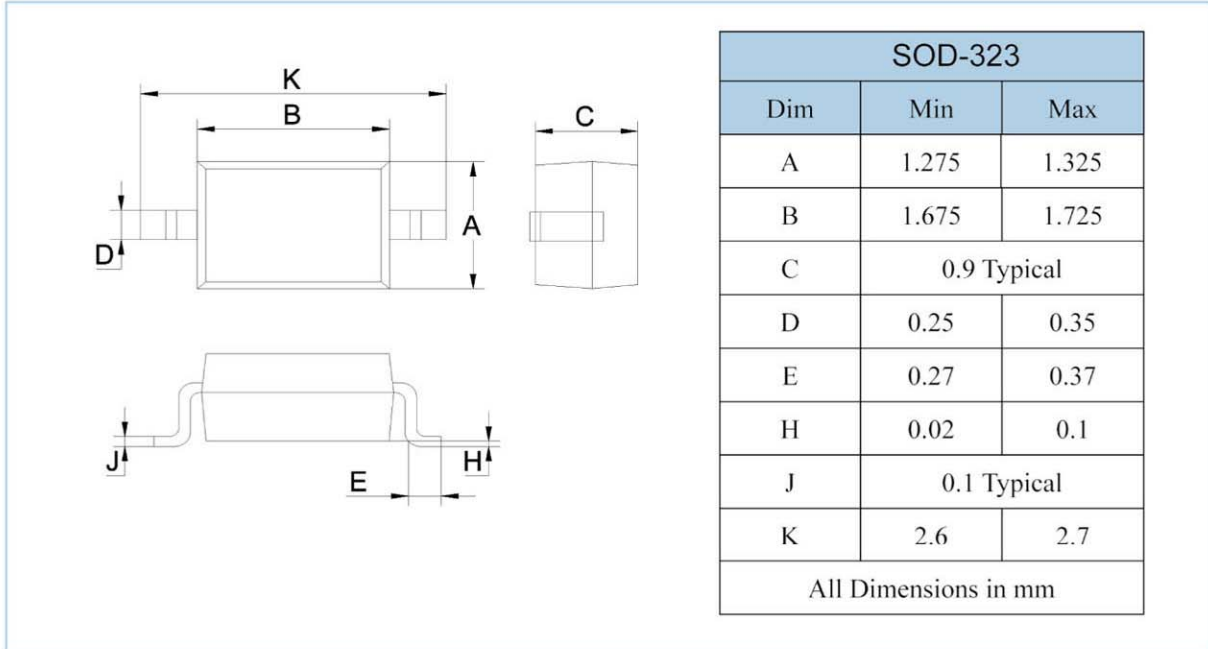

## SOLDERING FOOTPRINT

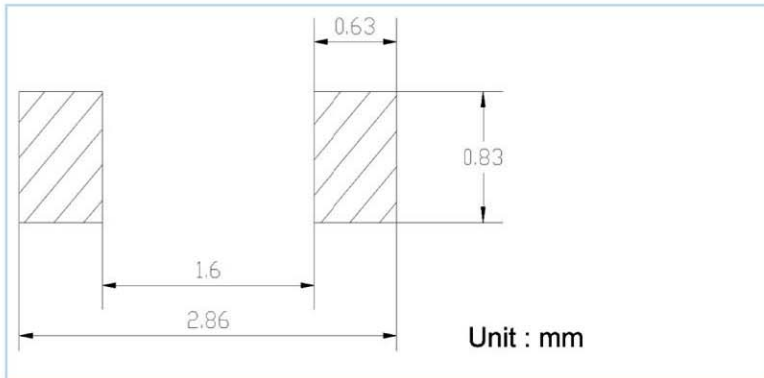

## PACKAGE INFORMATION

Device	Package	Shipping
BAT60B	SOD-323	3000/Tape&Reel

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Schottky Diodes & Rectifiers](#) category:*

*Click to view products by [Shikues](#) manufacturer:*

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)