

FEATURES

- ◆ For use in low voltage, high frequency inverters
- ◆ Free wheeling, and polanty protection applications


MECHANICAL DATA

Case: Molded plastic body

Terminals: Plated leads solderable per MIL-STD-750, Method 2026

Polarity: Polarity symbols marked on case

Marking: L2L

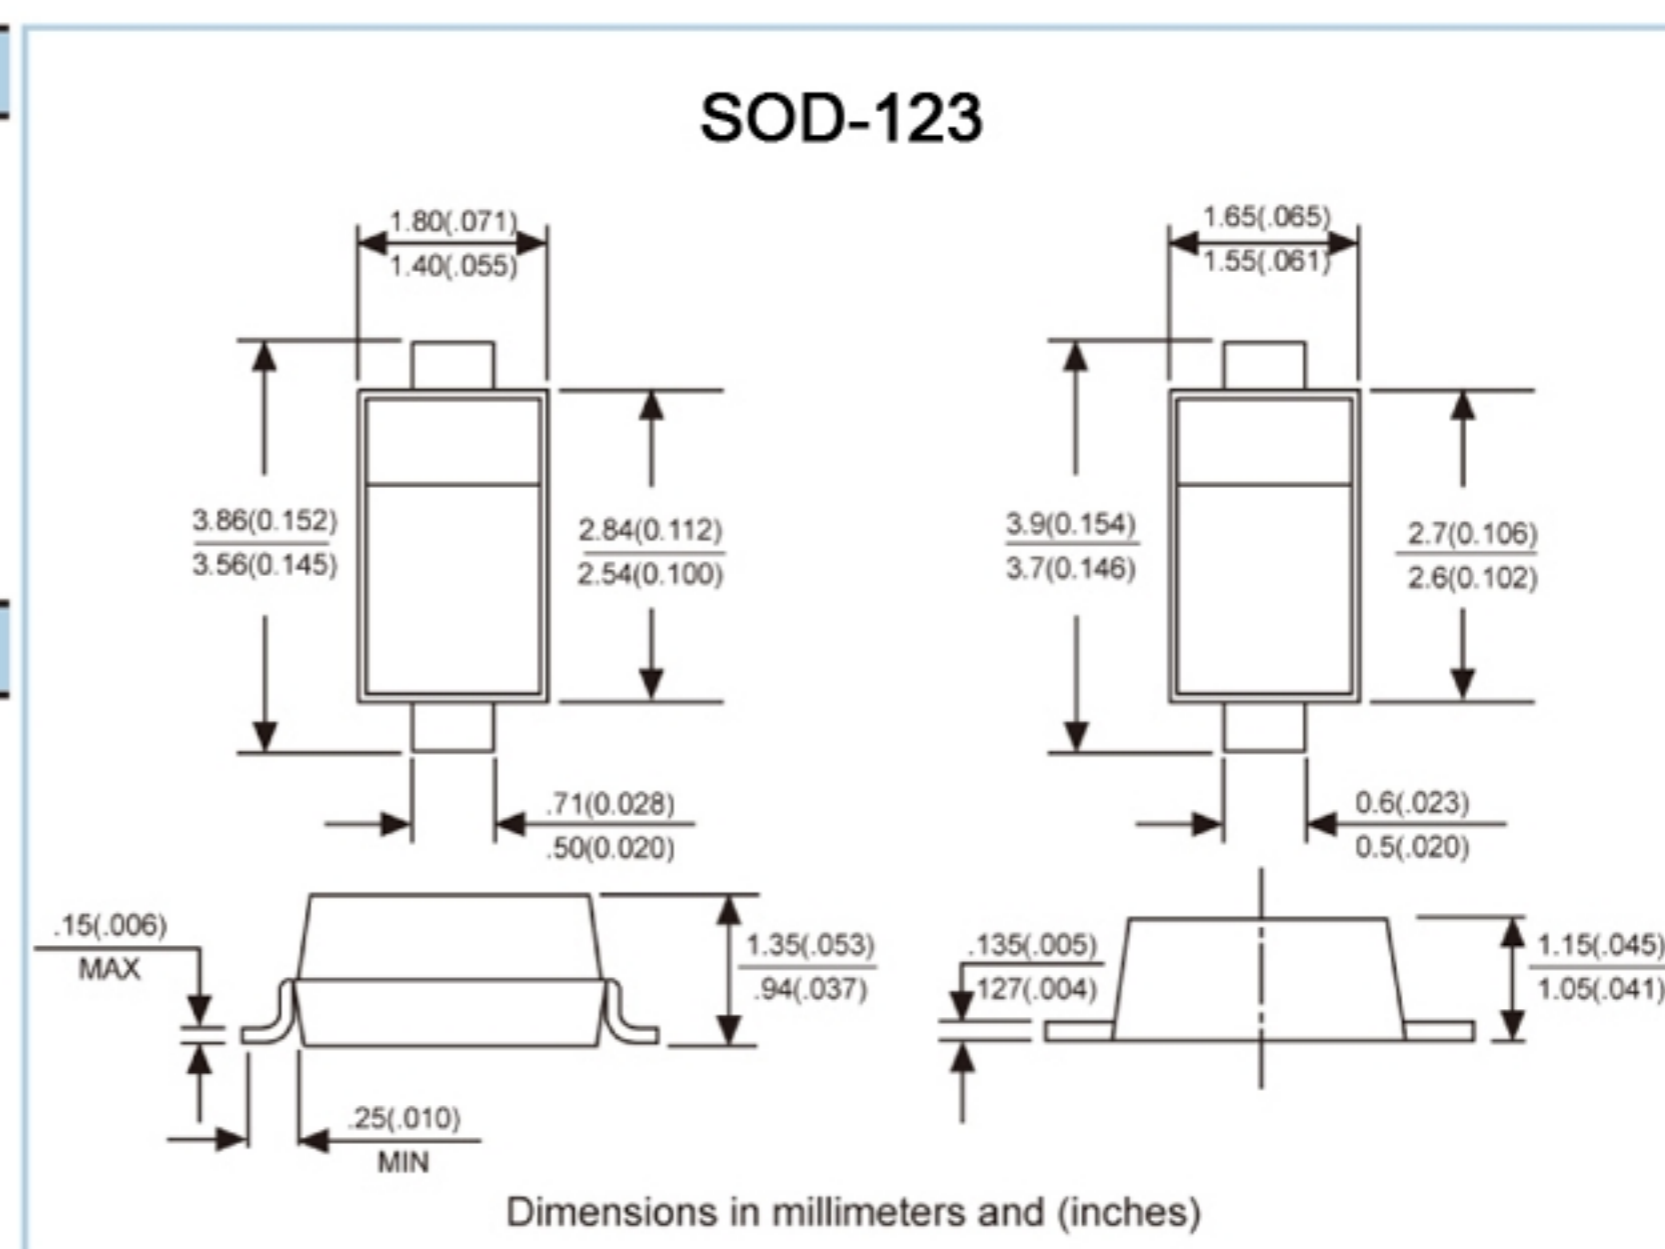

Maximum ratings and electrical characteristics, Single diode @ $T_A=25^{\circ}\text{C}$

PARAMETER	SYMBOLS	FIGURE	UNITS
Peak repetitive peak reverse voltage	V_{RRM}	40	V
Working peak reverse voltage	V_{RWM}		
DC Blocking voltage	V_R		
RMS Reverse voltage	$V_{R(RMS)}$	28	V
Average rectified output current	I_o	1	A
Peak forward surge current @=8.3ms	I_{FSM}	25	A
Repetitive peak forward current	I_{FRM}	625	mA
Power dissipation	P_d	250	mW
Thermal resistance junction to ambient	$R_{\theta JA}$	500	K/W
Storage temperature	T_{STG}	-65 to +150	$^{\circ}\text{C}$
Non-Repetitive peak reverse voltage	V_{RM}	20	V

Electrical ratings @ $T_A=25^{\circ}\text{C}$

PARAMETER	SYMBOLS	Min.	Max.	Unit	Test conditions
Reverse breakdown voltage	$V_{(BR)}$	40		V	$I_R=1\text{mA}$
Reverse voltage leakage current	I_R		1	mA	$V_R=20\text{V}$
Forward voltage	V_F		0.6	V	$I_F=1\text{A}$
Diode capacitance	C_D		120	pF	$V_R=4\text{V}, f=1.0\text{MHz}$

FIG. 1- FORWARD CURRENT DERATING CURVE

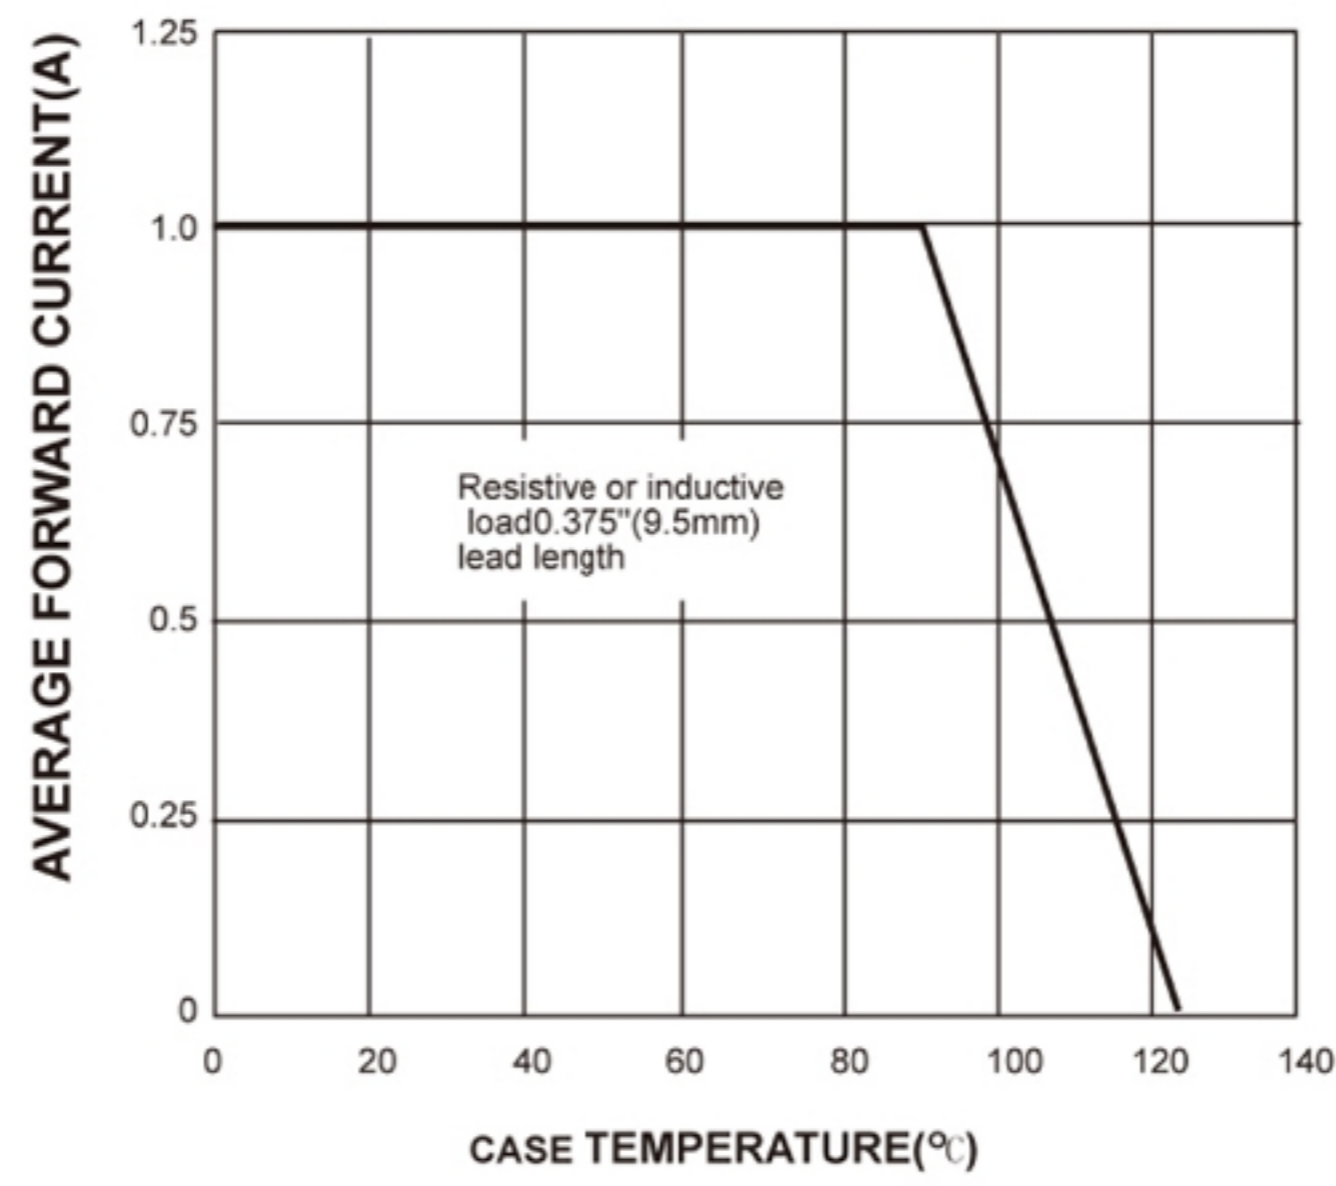


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

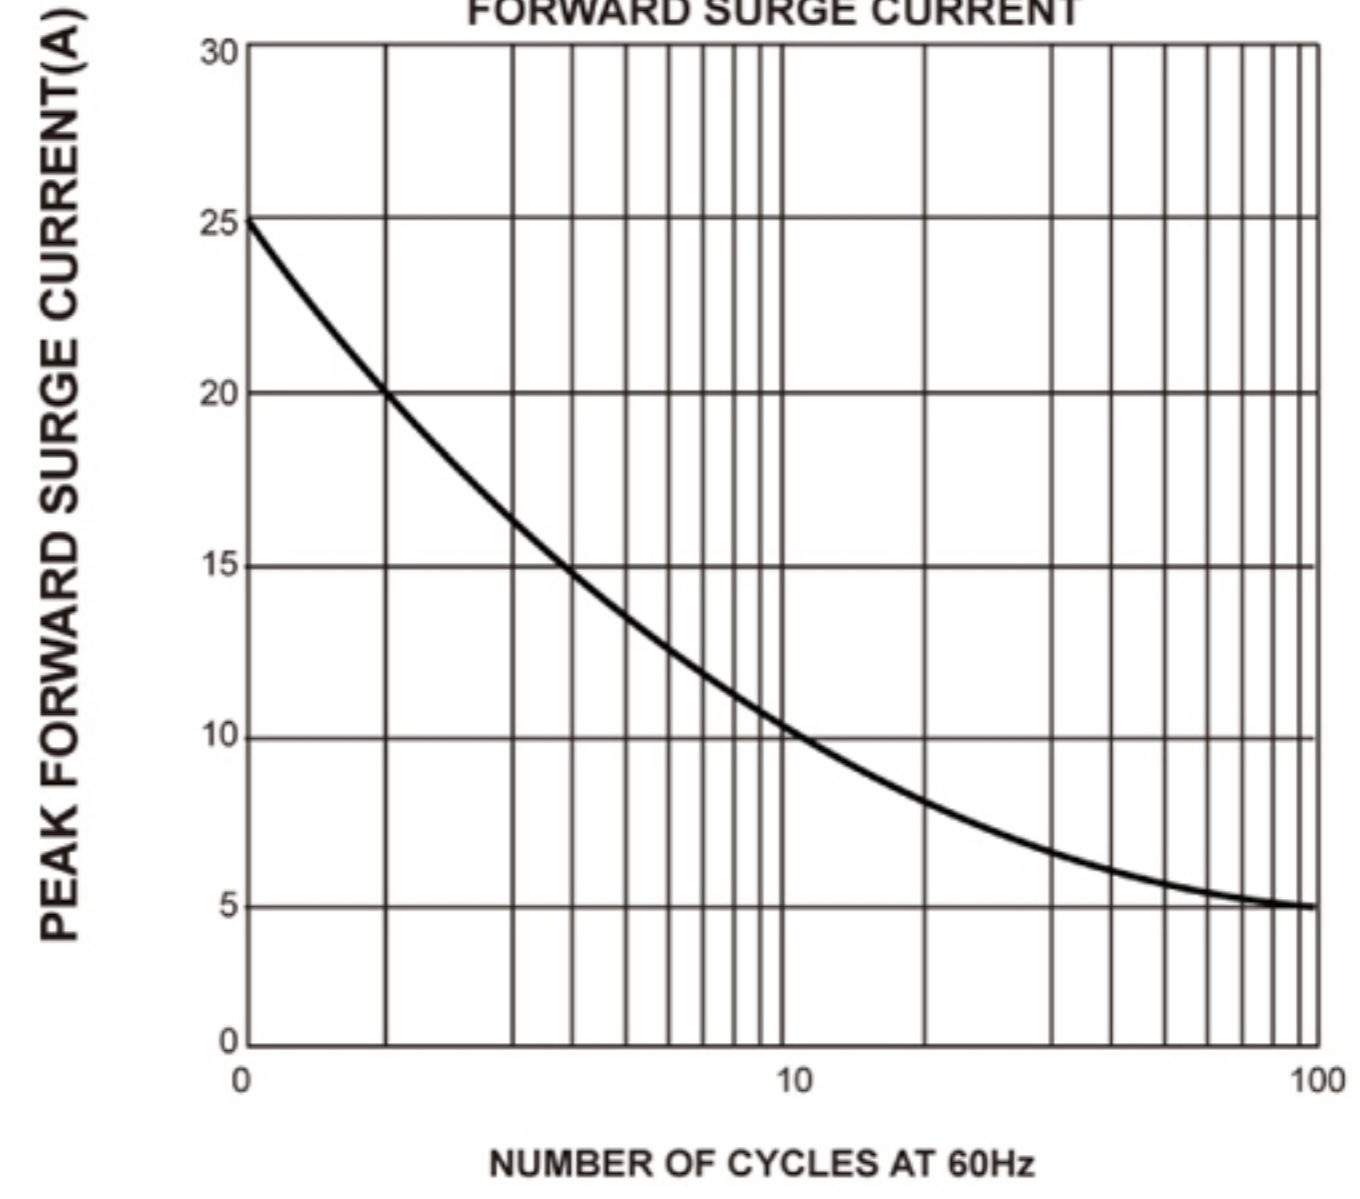


FIG. 3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

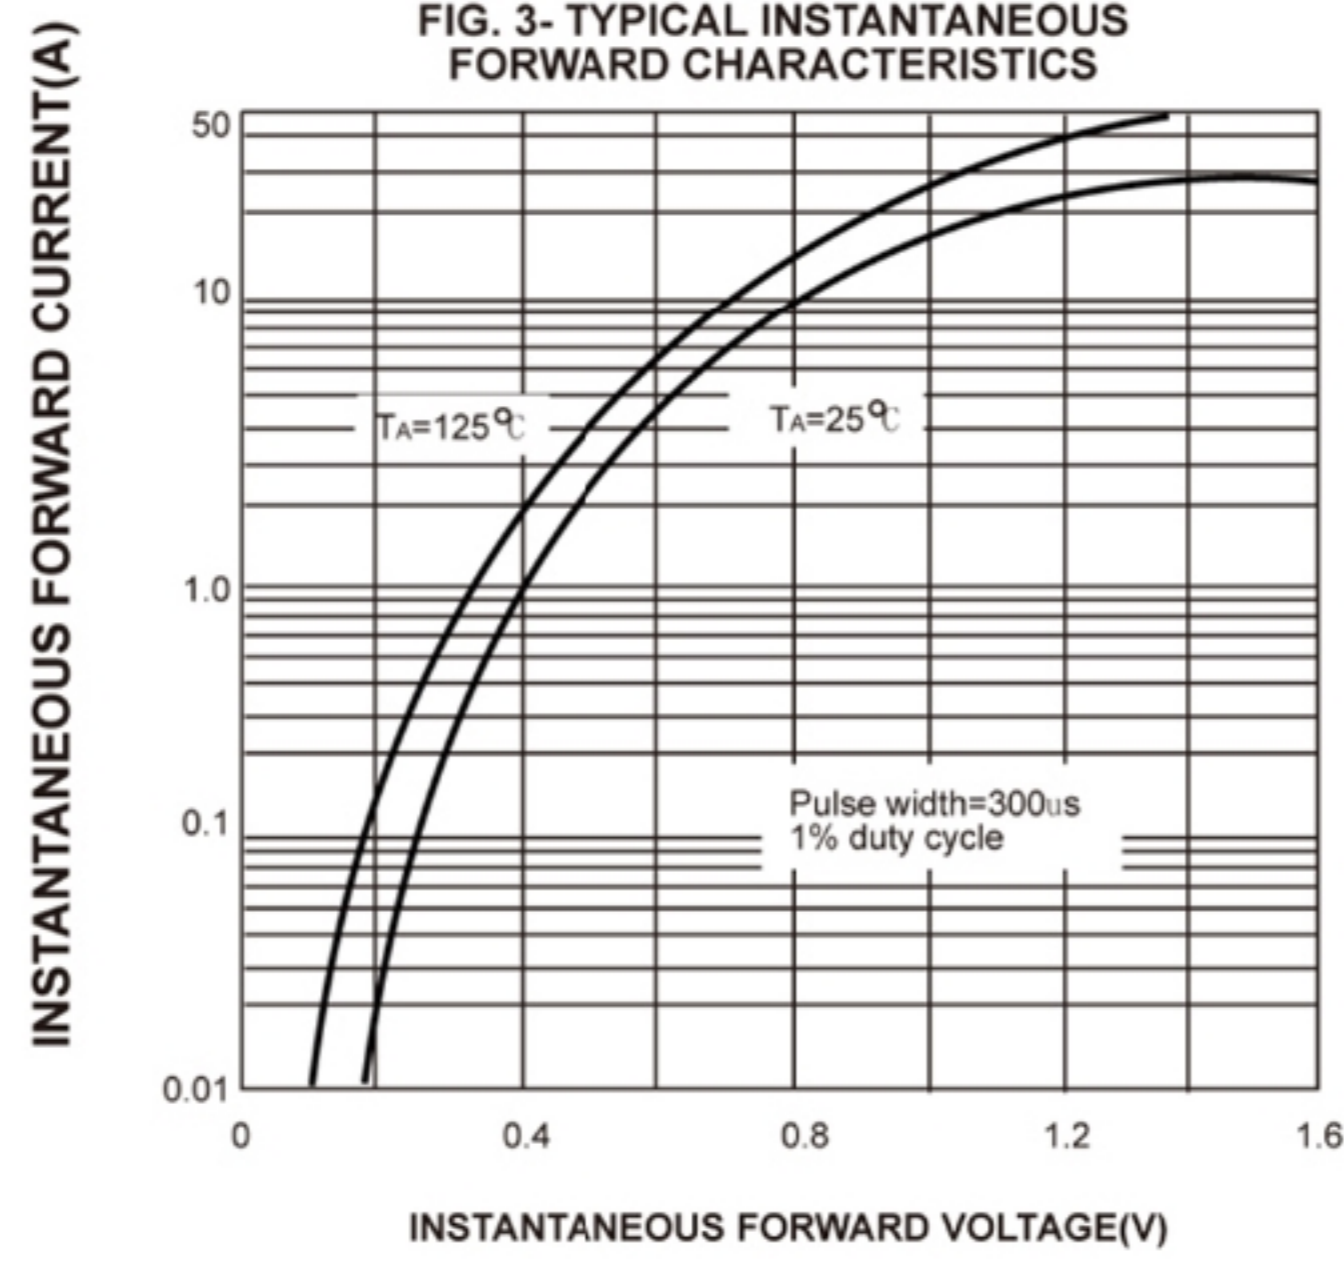


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

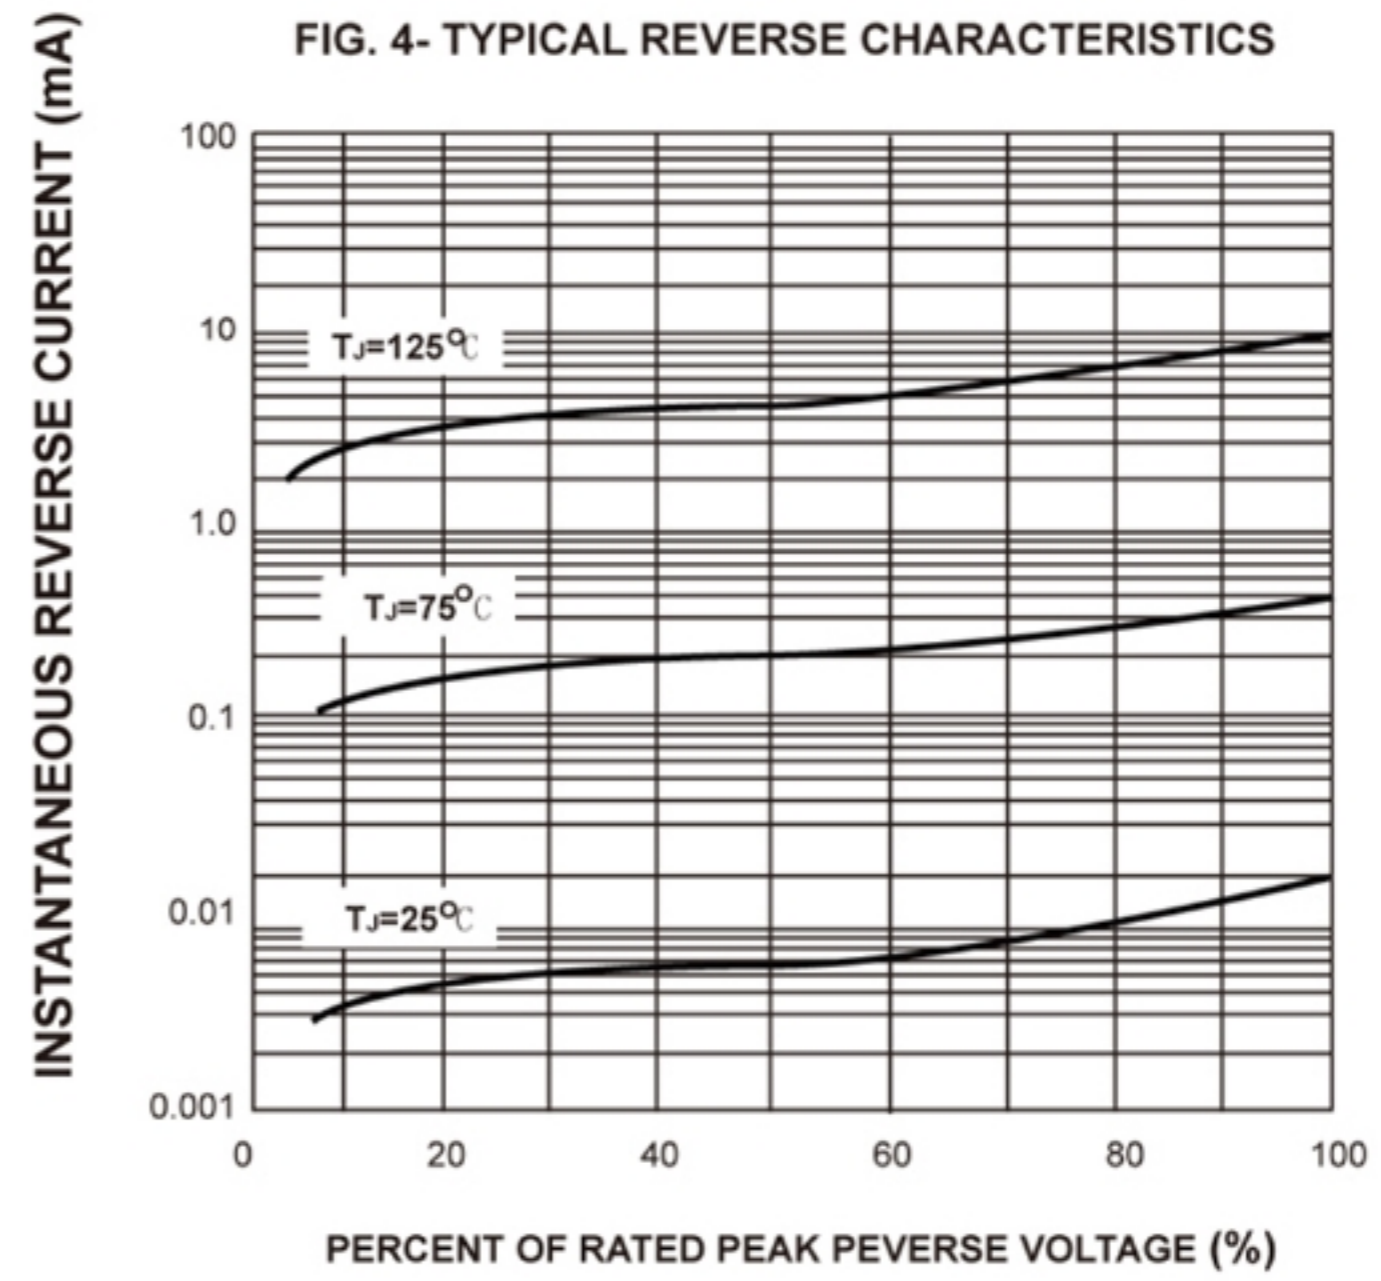


FIG. 5- TYPICAL JUNCTION CAPACITANCE


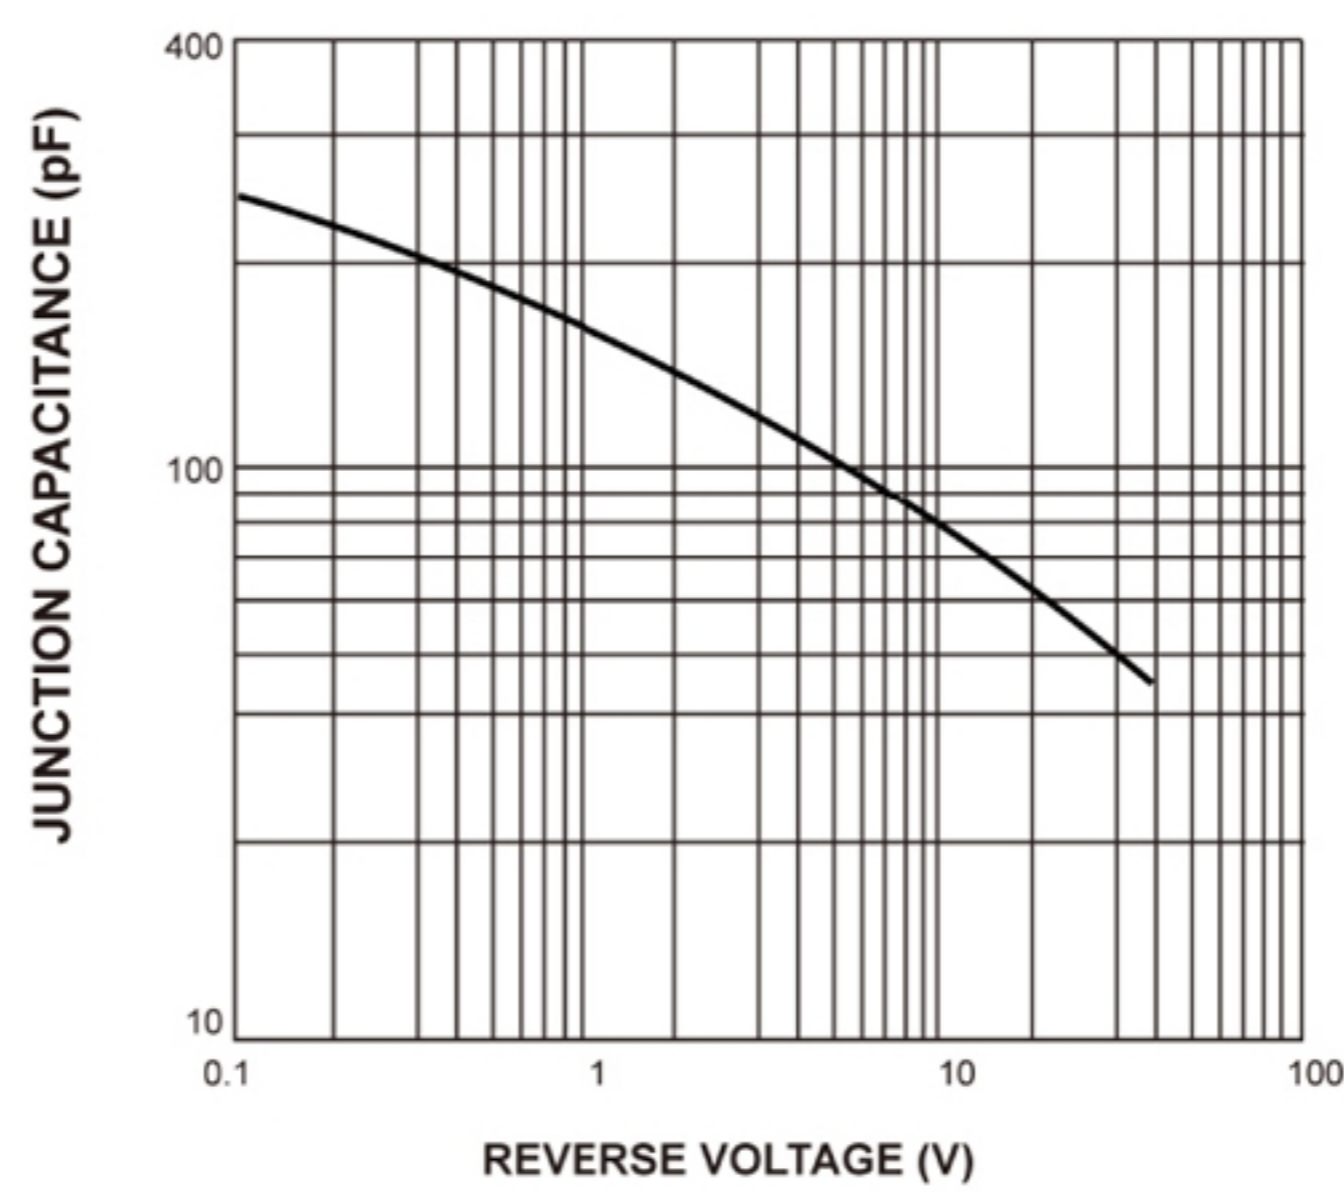


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

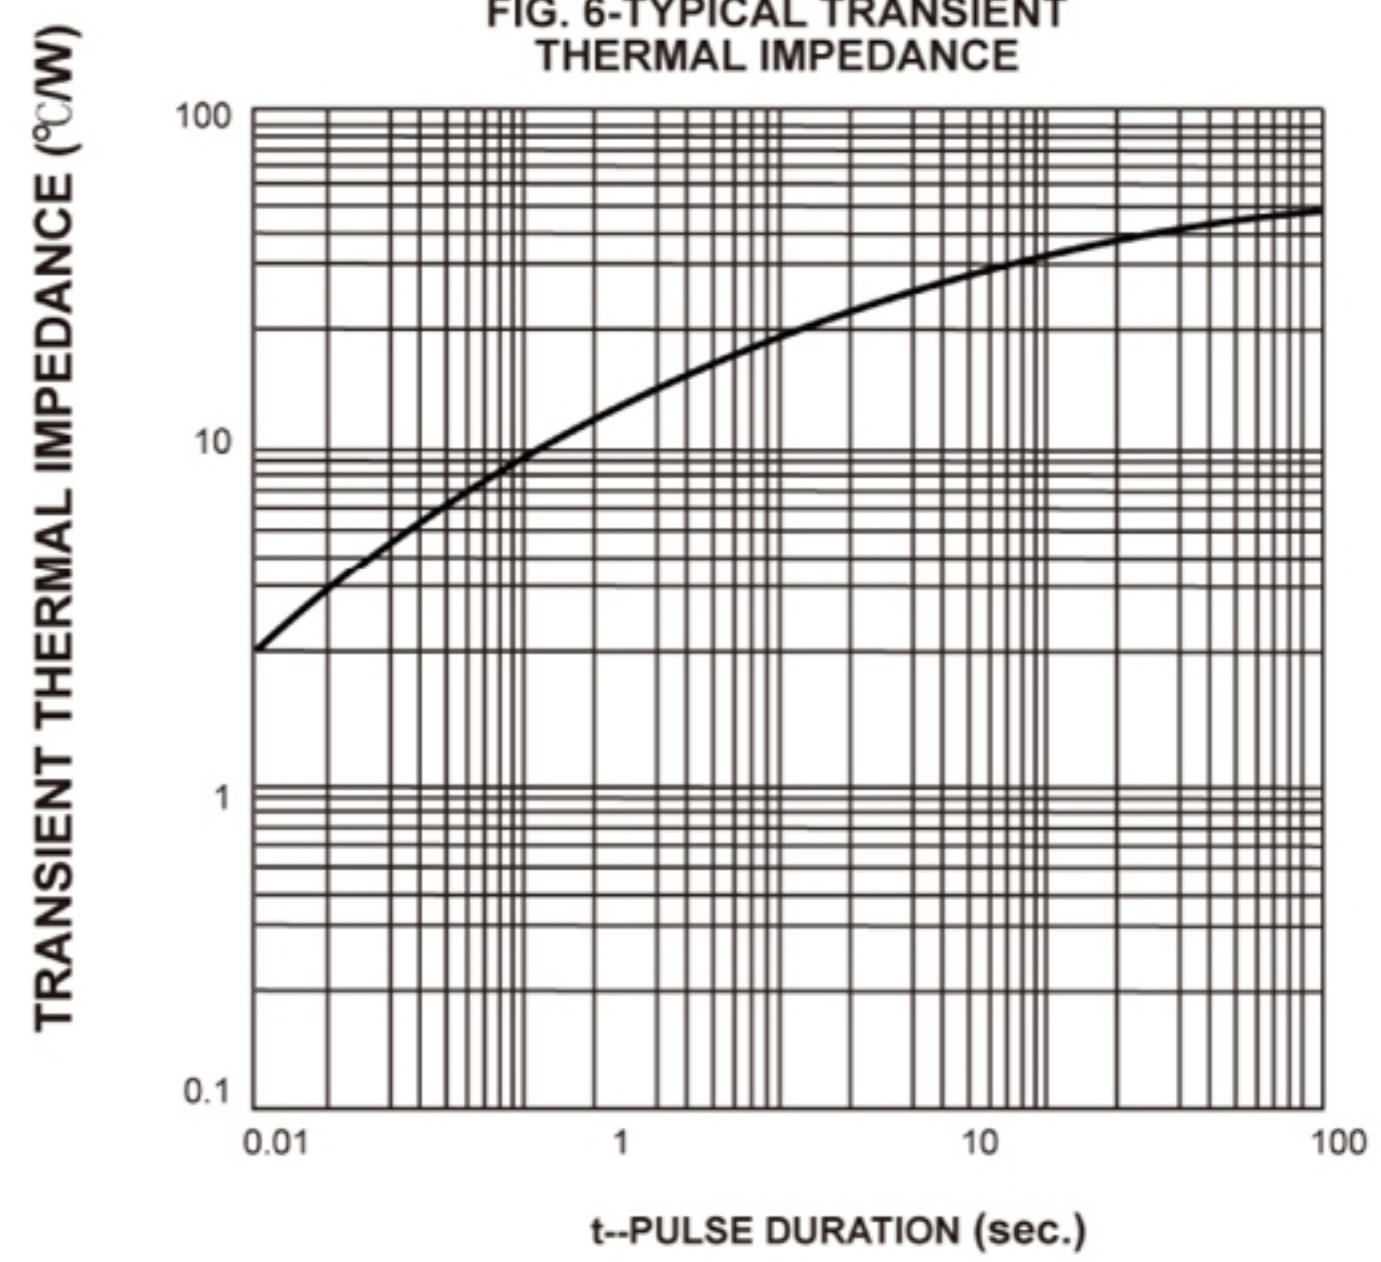

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Shikues](#) manufacturer:

Other Similar products are found below :

[CUS06\(TE85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)