

Measuring Devices and Power Monitoring



NEW

Direct reference to the products in the Industry Mall from the selection and ordering data tables:

Article No.
[www.siemens.com/product?Article No.](http://www.siemens.com/product?ArticleNo.)

3VA2025-5HL36-0AA0

Paper catalog:
 To get more product information enter the Web address plus Article No.



PDF catalog:
 Get more product information with just a mouse click.

| | |
|----------------------------------|--|
| Power monitoring | |
| 11/2 | Energy management in accordance with ISO 50001 |
| 11/5 | Hardware and software components powermanager |
| Ch.13 | PC-based power monitoring system |
| 11/7 | SIMATIC-based power data management system |
| 11/9 | |
| Measuring devices | |
| 11/11 | Introduction |
| 7KM PAC measuring devices | |
| 11/14 | 7KM PAC3100 measuring devices |
| 11/15 | 7KM PAC3200 measuring devices |
| 11/17 | 7KM PAC4200 measuring devices |
| 11/19 | 7KM PAC5100 measuring devices NEW |
| 11/20 | 7KM PAC5200 measuring devices NEW |
| 11/22 | Accessories for 7KM PAC |
| 11/23 | 7KM PAC expansion modules |
| 7KT PAC measuring devices | |
| 11/26 | 7KT PAC1500 three-phase measuring devices |
| 11/28 | 7KT PAC1500 single-phase measuring devices |
| 11/29 | 7KT PAC expansion modules |
| 11/30 | 7KT LAN couplers |
| Other measuring devices | |
| 11/32 | Digital voltmeters and ammeters |
| 11/34 | Time and pulse counters for standard rail mounting |
| 11/36 | Time counters for front-panel mounting |
| Accessories | |
| 11/37 | 4NC current transformers |
| 11/40 | 7KT12 current transformers |
| 11/41 | 7KT90 measuring selector switches |

For further technical product information:

[Configuration Manual](#)

[Measuring Devices and Power Monitoring](#)
 Article No.: 3ZW1012-7KM42-0AC1

[Siemens Industry Online Support:](#)
www.siemens.com/lowvoltage/product-support

→ Entry type:
 Application example
 Certificate
 Characteristic
 Download
 FAQ
 Manual
 Product note
 Software archive
 Technical data

Measuring Devices and Power Monitoring

Power Monitoring

Energy management in accordance with ISO 50001

Overview

A systematic approach to energy efficiency

The standard ISO 50001 supports companies with a specific process description for introducing a corporate energy management system. Standard-compliant energy management optimizes energy utilization, while continuously enhancing energy efficiency.

Defining energy policy objectives

A central management task is the formulation of an in-house energy policy. It defines relevant strategic and operational objectives. Ongoing planning will include the identification of additional optimization potential for the business areas under scrutiny, and the development of relevant improvement measures.

Introducing process optimization


As a first step, an energy manager must be identified and nominated. He will then evaluate captured data, and derive and implement appropriate optimization measures. He will report the achieved results to corporate management.

Making energy flows transparent

As a second step, basic energy consumption and cost data, as well as information on in-house energy production must be collected and documented clearly and verifiably. This requires the development of a reliable and precise system for the capture and analysis of consumption data. The objective is to recognize sustainable savings potential, to derive appropriate measures for that potential, and to implement these measures systematically.

Periodic controlling

Periodic checks will ensure that your energy management system functions correctly, and that objectives are reached. Corrective and preventative measures can then be implemented as needed.

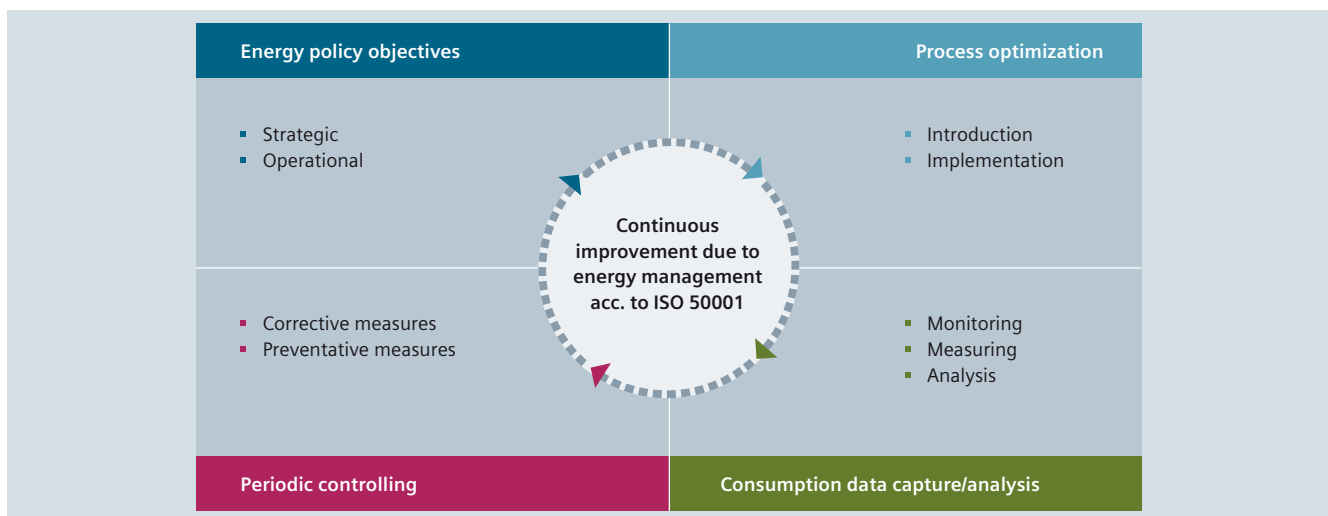

Introduction of a corporate energy management system in accordance with ISO 50001 for continuous improvement of energy efficiency by reducing energy consumption and costs.

Providing the basis with power monitoring

The power monitoring system from the SENTRON portfolio is suitable for infrastructure, industrial applications, and buildings. The 7KT/7KM PAC measuring devices record the data of outgoing feeders or individual loads.

The 3WL/3VA/3VL circuit breakers supply measured values and important information for diagnostics, fault detection, and maintenance via standardized bus systems.

With the powermanager power monitoring software, the recorded measured values can be easily visualized, analyzed, archived, and monitored.

Recording of generated energy using measuring devices in MID version


Derivation of optimization measures through transparency of the energy flows

Increased availability of energy through monitoring of critical states in the power supply

Increased system availability through continuous monitoring of switching states

Increased productivity through optimization of energy consumption and energy costs

Transparency at the infeed thanks to seamless recording of the power supply quality

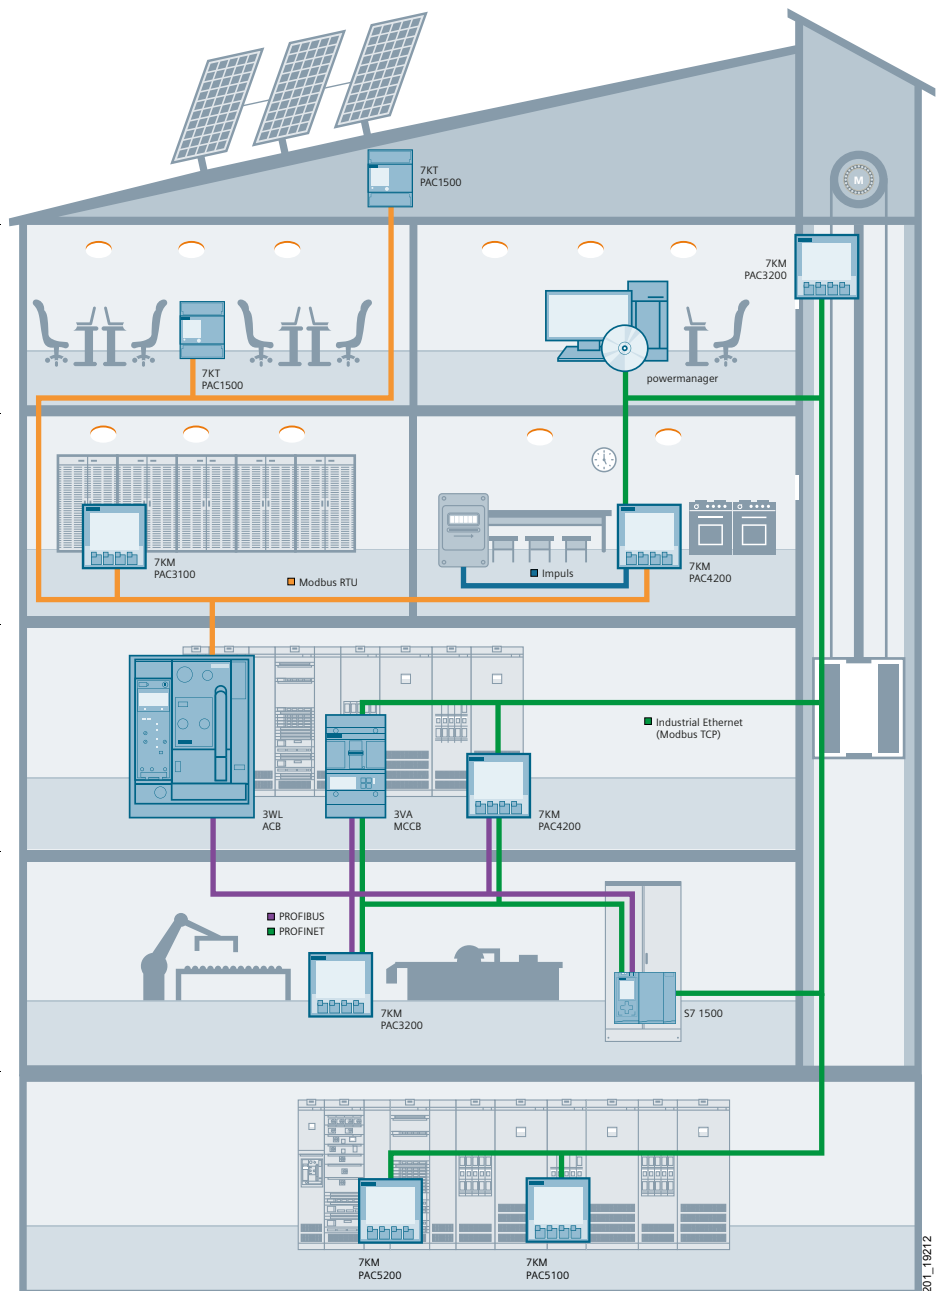

Measuring Devices and Power Monitoring

Power Monitoring

Energy management in accordance with ISO 50001


Continuously increasing energy efficiency

Precise cost center accounting for consumers



- Precise allocation of energy costs to cost centers
- Benchmarking between different cost centers
- Increased energy awareness

Detection of energy guzzlers, reduction of load peaks



- Detection of energy-intensive processes and loads
- Cost savings created by amending the power supply agreement
- Tax savings by seamless documentation of application-specific consumption

Protection of sensitive areas for high plant safety



- Avoidance of equipment failures due to overload
- Protection of sensitive devices against harmonics
- Early intervention possible by means of notifications

Monitoring of protective devices for high system availability



- Increased system availability
- Optimization of maintenance
- Fast response to service call-outs








Multi-site power monitoring



- Centralized, multi-site power monitoring via standard IT networks
- Benchmarking of various corporate units increases energy awareness
- Improvement of power supply conditions by bundling supply volumes

Overview

7KT PAC, 7KM PAC measuring devices and 3VA molded case circuit breakers with ETUs of the 8-series

| | 7KT PAC1500 | 7KM PAC3100 | 7KM PAC3200 | 7KM PAC4200 | 7KM PAC5100 | 7KM PAC5200 | 3VA ETU8.. |
|--|---|---|---|--|---|---|---|
| |  |  |  |  |  |  |  |
| | The entry-level solution when it comes to energy measurement | The cost-effective solution for digital measurement | The specialist solution for precise energy measurement | The professional solution for communication/monitoring | The specialist solution for measured value recording | The expert solution for power supply quality | The specialist solution for protection and energy measurement |
| Measuring range/connection | | | | | | | |
| Max. input voltage L-L/L-N | 400 V/230 V | 480 V/276 V | 690 V/400 V ¹⁾ | 690 V/400 V ¹⁾ | 690 V/400 V | 690 V/400 V | 690 V/400 V |
| Transformer connection version | x/5 A | x/5 A | x/1 A/x/5 A | x/1 A/x/5 A | x/1 A/x/5 A | x/1 A/x/5 A | Integrated |
| Direct connection version | 80 A/125 A | – | – | – | – | – | – |
| DC power supply unit with extra-low voltage version | – | – | 22 ... 65 V | 22 ... 65 V | – | – | 24 V |
| Single-phase counter version | ✓ | – | – | – | – | – | – |
| Electrically isolated voltage inputs | – | – | – | – | ✓ | ✓ | – |
| Variant without display (with web server) | – | – | – | – | ✓ | ✓ | – |
| Measured quantities | | | | | | | |
| Voltage, current, power, frequency, power factor | ✓ ²⁾ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Energy measurement | | | | | | | |
| • Apparent, active, reactive energy | – ✓ ✓ | – ✓ ✓ | ✓ ✓ ✓ | ✓ ✓ ✓ | ✓ ✓ ✓ | ✓ ✓ ✓ | ✓ ✓ ✓ |
| Extended measured quantities | | | | | | | |
| • Distortion factor THD (voltage, current) | – | – | ✓ ³⁾ | ✓ | ✓ | ✓ | ✓ |
| • Harmonics (voltage, current) | – | – | – | 3. ... 31. | 2. ... 40. | 2. ... 40. | – |
| • Phase angle/phase chart | – | – | – | ✓ | ✓ | ✓ | – |
| • Load profile record with time stamp for min/max values | – | – | – | ✓ | – | ✓ | ✓ |
| • Flicker acc. to IEC 61000-4-15 | – | – | – | – | – | ✓ | – |
| Monitoring functions | | | | | | | |
| Operating hours counter | – | – | ✓ | ✓ | – | – | ✓ |
| Limit monitoring | – | – | ✓ | ✓ | ✓ | ✓ | ✓ |
| Logic functions | – | – | ✓ | ✓ | ✓ | ✓ | – |
| Event log | – | – | – | > 4000 events | ✓ | ✓ | ✓ |
| Gateway function | – | – | – | ✓ | – | – | – |
| Reporting acc. to EN 50160 | – | – | – | – | – | ✓ | – |
| Integrated fault recorder | – | – | – | – | – | ✓ | – |
| System integration and communication | | | | | | | |
| Digital inputs/digital outputs | – | 2/2 | 1/1 | 2/2 | 0/2 | 0/2 | – |
| S0 interface | ✓ | ✓ | ✓ | ✓ | – | – | Optional |
| 4DI/2DO expansion module | – | – | – | Optional | – | – | Optional |
| M-Bus | Optional | – | – | – | – | – | – |
| Instabus KNX | Optional | – | – | – | – | – | – |
| Modbus RTU | Optional | ✓ | Optional | Optional | – | – | Optional |
| Ethernet with Modbus TCP | – | – | ✓ | ✓ | ✓ | ✓ | ✓ |
| PROFIBUS DPV1 | – | – | Optional | Optional | – | – | Optional |
| PROFINET IO/ PROFlenergy | – | – | Optional | Optional | – | – | Optional |
| Parameterization software | ✓ | powerconfig | powerconfig | powerconfig | powerconfig | powerconfig | powerconfig |
| Integration of power monitoring system | powermanager | powermanager | powermanager | powermanager | powermanager | powermanager | powermanager |
| Web servers | – | – | – | – | ✓ | ✓ | – |
| General data | | | | | | | |
| Measuring accuracy, active energy, reactive energy | 1 2 | 1 3 | 0.5 S 2 | 0.2 S 2 | 0.5 S 2 | 0.5 S 2 | 2 S 2 ⁴⁾ |
| MID version | ✓ | – | – | – | – | – | – |
| Installation | Standard mounting rail | Front mounting | Front mounting | Front mounting | Front mounting/standard mounting rail | Front mounting/standard mounting rail | See Chap. 2 |
| Dimensions in MW (1 MW = 18 mm) or in mm | 2 / 4 / 6 MW | 96 × 96 × 56 | 96 × 96 × 56 | 96 × 96 × 82 | 96 × 96 × 100 | 96 × 96 × 100 | 96 × 96 × 82 ⁵⁾ |

¹⁾ With the exception of devices with power supply units with extra-low voltage. ✓ Available / possible -- Not available / not possible

²⁾ On the display – energy and power values only. Additional measured quantities are transmitted via optional expansion modules 7KT Modbus / 7KT M-Bus

³⁾ THD indication.

⁴⁾ Measuring accuracy including current transformer

⁵⁾ For display via DSP800, see chapter "Molded Case Circuit Breakers"

Measuring Devices and Power Monitoring

Power Monitoring

Hardware and software components

Accessories for 7KM PAC measuring devices



7KT PAC expansion modules

M-Bus



Modbus RTU



RS 485



KNX



7KT LAN couplers

Web servers

| | | | | | |
|---------------|------------------|--------------------|---------------------------------------|-------------------|--|
| Specification | Up to 9600 bit/s | Up to 115200 bit/s | For connection to the 7KT LAN coupler | Up to 19200 bit/s | For up to 30 7KT PAC1500 measuring devices |
|---------------|------------------|--------------------|---------------------------------------|-------------------|--|

Accessories for 7KM PAC measuring devices



7KM PAC expansion modules

Switched Ethernet
For 7KM PAC3200,
7KM PAC4200 and 3VA
COM100/COM800



PROFIBUS DP
For 7KM PAC3200,
7KM PAC4200 and 3VA
COM100/COM800



RS 485
For 7KM PAC3200,
7KM PAC4200 and 3VA
COM100/COM800



4DI/2DO
For 7KM PAC4200
(number of digital inputs/
outputs per module 4/2)



Standard mounting rail adapter


7KM PAC TMP2
For 7KM PAC3100/
3200/4200 for mounting
on a standard mounting
rail

| | | | | | |
|--|--|------|------------|--------------|----|
| Protocol | PROFINET IO PROEnergy Modbus TCP | DPV1 | Modbus RTU | S0 interface | -- |
| Maximum number of connectable expansion modules of the same type | 1 | 1 | 1 | 2 | -- |


The powerconfig software for commissioning

Software tool for the efficient commissioning and diagnosis of communication-capable SENTRON components


| | |
|---|---|
| License | Free use |
| Supported devices | 7KM PAC3100/3200/4200 measuring devices, incl. expansion modules 3WL/3VL/3VA/ATC5300 circuit breakers |
| General range of functions | The PC-based tool facilitates parameterization of the devices, resulting in substantial time savings, particularly when several devices have to be set up. The device settings can be stored in the PC and printed out. The tool enables monitoring of instantaneous measured quantities, which can be printed out if required. Execution of specific device functions, such as resetting of devices and setting of energy counters |
| Supported languages | German, English, Chinese, Spanish, Portuguese |
| Service functions | Firmware updates and switching of language packs for 7KM PAC measuring devices |
| Functional scope with 7KM PAC4200 and 3VA | Readout of data stored in the device (events; load profile history; daily energy counters), which are saved in csv format |

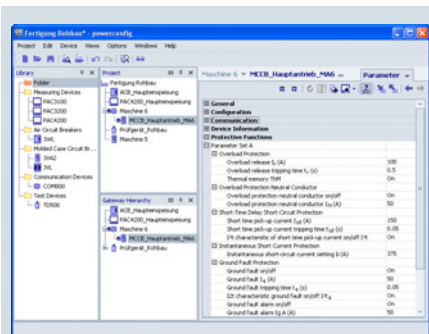

Setting of parameter values

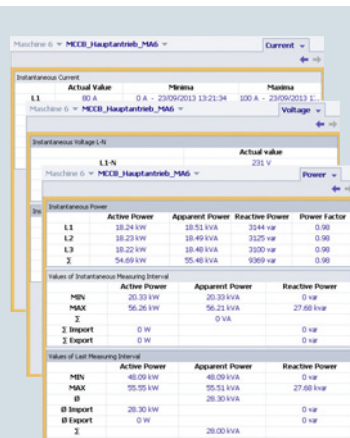

Display of actual measured quantities

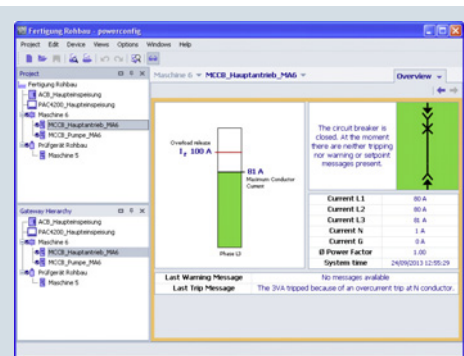

Display of the circuit breaker state

For more information about powerconfig, see chapter "Software"

Overview



Hardware components of the PC-based power monitoring system



Software component of the power monitoring software: powermanager

Power monitoring system with SENTRON components

The TÜV-certified power monitoring system from the SENTRON portfolio consists of the 7KT/7KM PAC measuring devices, the 3WL/3VA/3VL circuit breakers, and the powermanager power monitoring software. This forms the technical basis for supporting a corporate energy management system as specified by ISO 50001.

The hardware and software components are optimally coordinated with each other. For example, special drivers for the SENTRON devices are integrated in the powermanager power monitoring software. They enable energy data to be captured without any great configuration effort and they indicate the key measured values or the status by means of predefined views.

This reduces the engineering overhead. The device functions are optimally supported in the software.

Features of the powermanager power monitoring software

The powermanager power monitoring software constitutes the optimum technical basis for supporting a corporate power monitoring system as specified by ISO 50001:

- Independent power monitoring software
- Can be operated using a Windows PC and measuring devices with Ethernet connection
- Easy getting started with basic license, can be extended with flexible licensing concept according to customer requirements
- Fully scalable, relative to number of devices and software functions
- Ensures optimum integration of 7KT/7KM PAC measuring devices, as well as 3WL/3VA/3VL circuit breakers and other Modbus devices
- Support of the various device and communication interfaces (Modbus RTU, Modbus TCP)
- Status display of devices
- Available languages: German, English, Spanish, Portuguese, Italian, French, Turkish, Chinese

Measuring Devices and Power Monitoring

Power Monitoring

PC-based power monitoring system

Application


Industries

An energy-efficient production system enhances both the image and the productivity of the company, and thus its competitiveness.

Power monitoring as the technical basis for energy management for increasing a company's energy efficiency is thus of interest to all areas, from industrial applications to infrastructure, and buildings in the service sector.

System configuration

- Integration of measuring devices by means of predefined device templates for the 7KT/7KM PAC measuring devices and the 3WL/3VA/3VL circuit breakers
- Easy integration of existing modbus-capable measuring devices
- Communication through Standard Ethernet
- Integration of devices with RS 485 interface (ModbusRTU) through Modbus gateway, e.g. the 7KM PAC4200 measuring device can be used as the gateway

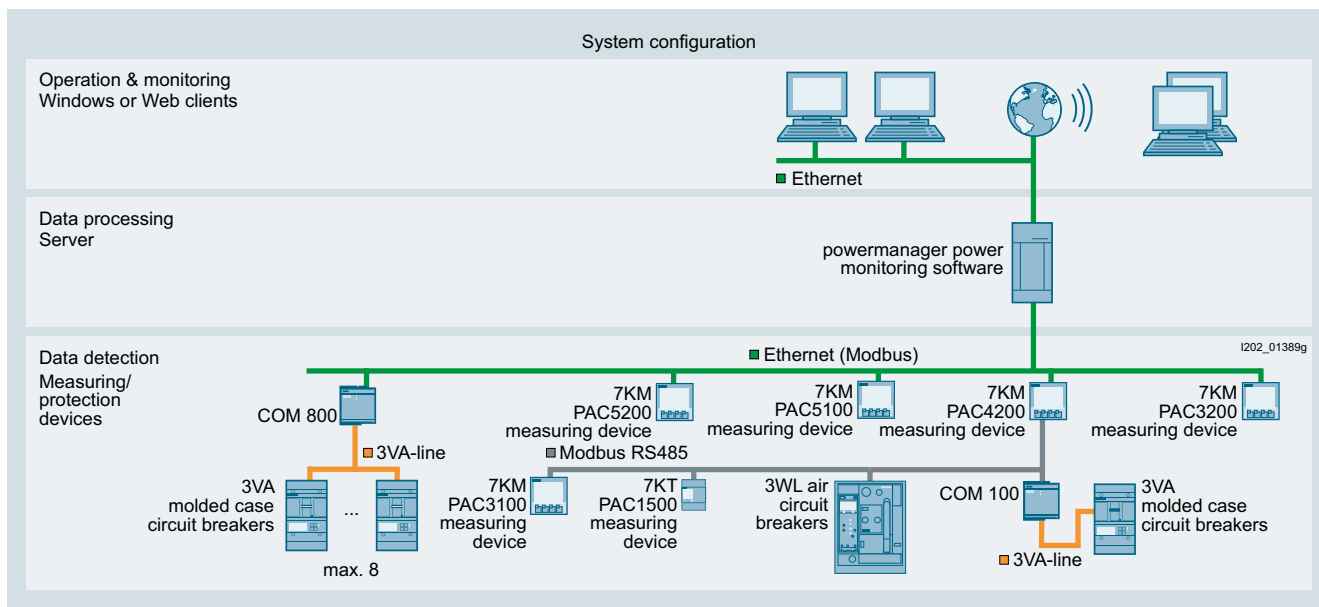

Typical topology of a power monitoring system

More information

TÜV certification



The TÜV certificate is available from www.siemens.com/tuev-certificate-of-conformity

Components of the PC-based power monitoring system

The hardware components of the PC-based power monitoring system are

- 7KM PAC measuring devices, [see this chapter](#)
- 3WL air circuit breakers, [see chapter "Air Circuit Breakers"](#)
- 3VL molded case circuit breakers, [see chapter "Molded Case Circuit Breakers"](#)
- 3VA molded case circuit breakers, [see chapter "Molded Case Circuit Breakers"](#)

Software of the PC-based power monitoring system


The software of the PC-based power monitoring system is powermanager, [see chapter "Software"](#).

Powermanager system packages with software and hardware are an easy and low-cost way to get started in a power monitoring system, [see chapter "Software"](#).

Internet

You can find more information on the Internet at: www.siemens.com/powermonitoring

Overview

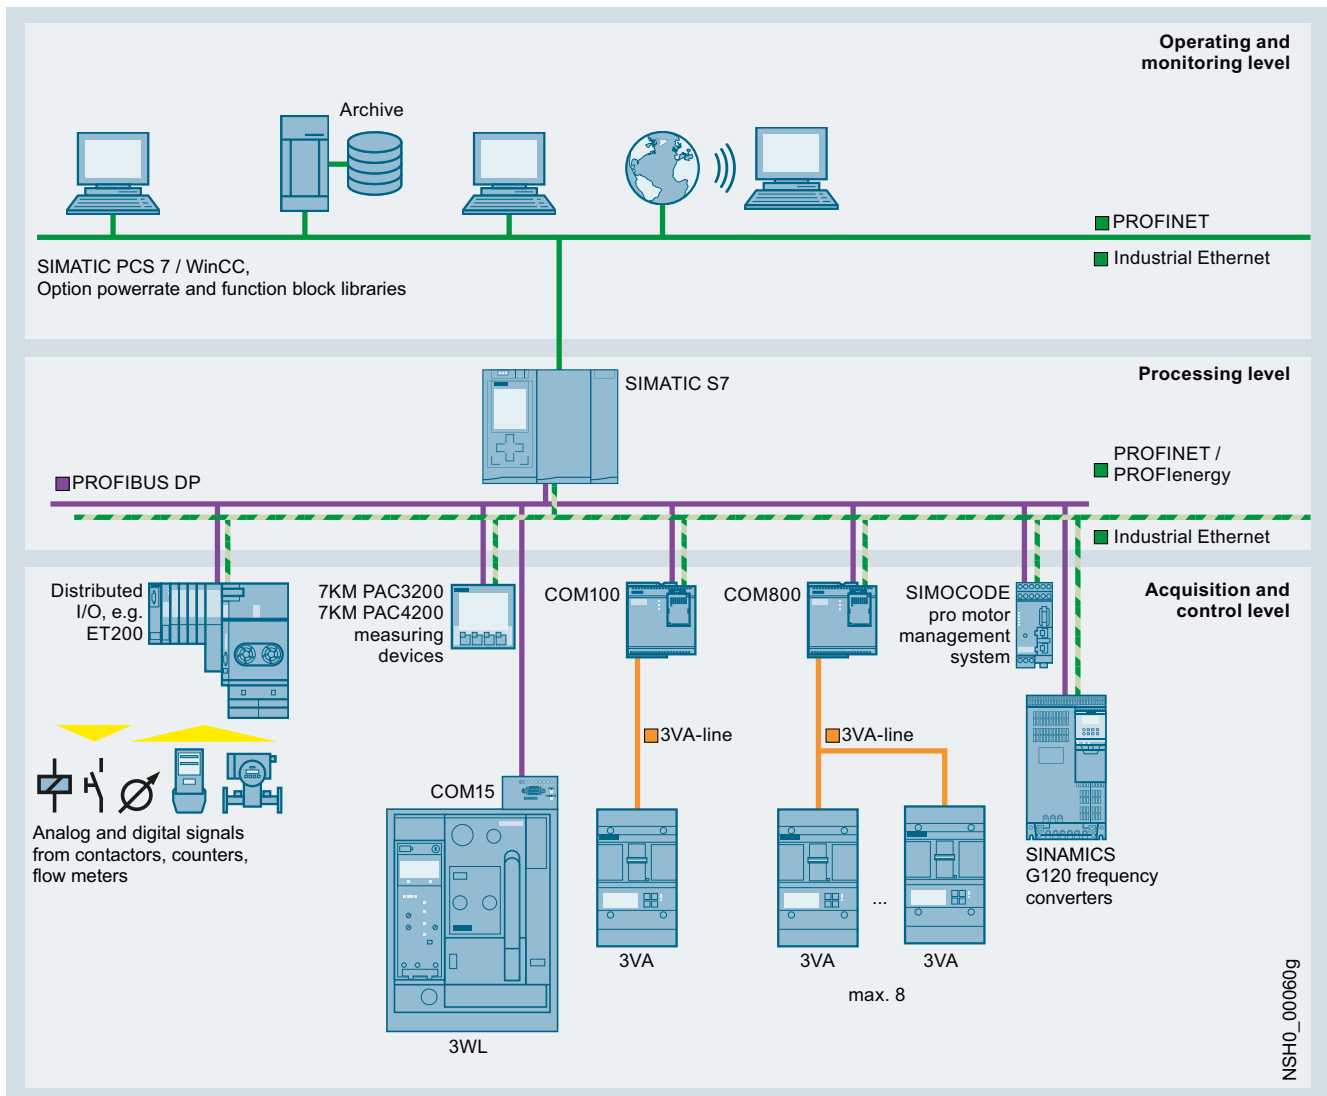

11

SIMATIC-based solutions for the process and manufacturing industry

A key feature of the process and manufacturing industry is frequently high energy consumption. It therefore makes sense to integrate a power data management system in existing systems.

Communication through PROFIBUS DP

PROFIBUS DP enables integration of a wide range of devices:

- For the protection of distribution boards and loads: Protective devices, such as circuit breakers
- For open-loop and closed-loop control: Frequency converters, motor management systems and soft starters
- For detection
 - Electrical measured quantities: Via the 7KM PAC3200/4200 measuring devices
 - Non-electrical measured quantities: Via analog/digital converters

PROFINET and PROFIenergy

An increasing number of devices in automation technology offer PROFINET. The 7KM PAC Switched Ethernet PROFINET expansion module enables the 7KM PAC3200/PAC4200 measuring devices and 3VA circuit breakers to be connected to the automation systems.

PROFIenergy is a "Common Application Profile" from Profibus International. Thanks to PROFIenergy it is possible to create a power data management system with standardized device interfaces.

Function block libraries for SIMATIC PCS 7 and WinCC

The function block library for SIMATIC PCS 7 and WinCC ensures device integration as follows:

- Measured quantities and states can be connected via CFC
- Structured display of measured quantities and protection parameters for the 3WL/3VA/3VL circuit breakers.
- Limit value violations are displayed, archived and acknowledged in the relevant communications system in the usual way
- Circuit breakers can be program-controlled or manually operated with the appropriate user authorization

Measuring Devices and Power Monitoring

Power Monitoring

SIMATIC-based power data management system

Benefits

- Increased energy efficiency due to precise knowledge of the load profile
- Optimization of power supply agreements
- Allocation of power costs to cost centers
- Optimization of plant maintenance
- Identification of critical plant conditions
- Reliable monitoring of the power limit through automatic load management

Application

The SIMATIC-based power data management system is used in all industries in which PCS 7 and WinCC are used, and the transparency and monitoring of power flows is crucial.

More information

Hardware components

The hardware components of the SIMATIC-based power data management system are

- 7KM PAC measuring devices, [see this chapter](#)
- 3WL air circuit breakers, [see chapter "Air Circuit Breakers"](#)
- 3VL molded case circuit breakers, [see chapter "Molded Case Circuit Breakers"](#)
- 3VA molded case circuit breakers, [see chapter "Molded Case Circuit Breakers"](#)

Software components

The software components of the SIMATIC-based power data management system are






- Library 7KM PAC3200 for SIMATIC PCS 7
- Library 7KM PAC3200 for SIMATIC WinCC

For information about the software components, [see chapter "Software"](#)

Internet

You can find more information on the Internet at: www.siemens.com/powermonitoring

Overview







| Devices | Page | Application | Standards | Used in | | |
|---|-------|--|--|---------------------------|-----------------------|----------|
| | | | | Non-residential buildings | Residential buildings | Industry |
| 7KM PAC measuring devices | | | | | | |
|  <p>7KM PAC3100 measuring device AC/DC wide-range power supply unit, screw connection</p> | 11/14 | <p>Control panel instrument with graphics display, integrated digital inputs and outputs and an RS 485 interface for the transmission of measured values and configurations.</p> <p>Display of 30 electrical measured values and consumption values in switchboard assemblies, infeeds or outgoing feeders.</p> <p>International standards and multi-lingual displays for worldwide use.</p> | Measurement accuracy for energy acc. to IEC 61557-12 | ✓ | -- | ✓ |
|  <p>7KM PAC3200 measuring device 3 versions:</p> <ul style="list-style-type: none"> AC/DC wide-range power supply unit, screw connection DC power supply unit with extra-low voltage, screw connection AC/DC wide-range power supply unit, ring cable lug connection | 11/15 | <p>Control panel instrument with graphics display, integrated digital inputs and outputs and an integrated Ethernet interface for the transmission of measured values and configurations.</p> <p>Display of over 50 electrical measured values for switchboard assemblies, infeeds or outgoing feeders. Dual-tariff measuring devices for precise energy measurement for power import and feedback.</p> <p>The following components are available:</p> <ul style="list-style-type: none"> 7KM PAC Switched Ethernet PROFINET 7KM PAC RS 485 7KM PAC PROFIBUS DP | Measuring accuracy for energy acc. to IEC 62053-22/23 and IEC 61557-12 | ✓ | -- | ✓ |
|  <p>7KM PAC4200 measuring device 3 versions:</p> <ul style="list-style-type: none"> AC/DC wide-range power supply unit, screw connection DC power supply unit with extra-low voltage, screw connection AC/DC wide-range power supply unit, ring cable lug connection | 11/17 | <p>Control panel instrument with graphics display, user-defined displays, memory, clock and calendar function, digital inputs and outputs and an integrated Ethernet interface with gateway function to transfer measured values and configurations.</p> <p>Display of over 200 electrical measured values for switchboard assemblies, infeeds or outgoing feeders. Extensive functions for precise energy measurement for power import and feedback and assessment of the system quality.</p> <p>The following components are available:</p> <ul style="list-style-type: none"> 7KM PAC Switched Ethernet PROFINET 7KM PAC RS 485 7KM PAC PROFIBUS DP 7KM PAC 4DI/2DO | Measuring accuracy for energy acc. to IEC 62053-22/23 and IEC 61557-12 | ✓ | -- | ✓ |
|  <p>7KM PAC5100 measuring device NEW 2 versions:</p> <ul style="list-style-type: none"> Control panel instrument with graphics display Standard rail instrument without display | 11/19 | <p>Control panel instrument with graphics display and user-defined displays, or instrument for standard rail mounting in accordance with EN 60750, web server for parameterization, visualization and data management, 2 binary outputs, electrically isolated voltage inputs, synchronization via internal RTC clock or externally via NTP, 4 freely parameterizable LEDs for device status or limit violations, as well as integrated RJ45 Ethernet interface.</p> <p>Recording of more than 250 electrical measured values for switchboard assemblies, infeeds or outgoing feeders, extensive functions for precise energy measurement for power import and feedback, and for assessment of the system quality.</p> | Measuring accuracy for energy acc. to IEC 62053-22/23 and IEC 61557-12 | ✓ | -- | ✓ |
|  <p>7KM PAC5200 measuring device NEW 2 versions:</p> <ul style="list-style-type: none"> Control panel instrument with graphics display Standard rail instrument without display | 11/20 | <p>Control panel instrument with graphics display and user-defined displays, or instrument for standard rail mounting in accordance with EN 60750, web server for parameterization, visualization and data management, 2 binary outputs, electrically isolated voltage inputs, flicker in accordance with IEC 61000-4-15, synchronization via internal RTC clock or externally via NTP, 4 freely parameterizable LEDs for device status or limit violations, 2 GB memory, integrated fault recorder, reporting in accordance with EN 50160, rms recorder, as well as integrated RJ45 Ethernet interface.</p> <p>Display of over 250 electrical measured values for switchboard assemblies, infeeds or outgoing feeders. Extensive functions for precise energy measurement for power import and feedback and assessment of the system quality.</p> | Measuring accuracy for energy acc. to IEC 62053-22/23 and IEC 61557-12 | ✓ | -- | ✓ |

Measuring Devices and Power Monitoring

Measuring Devices

Introduction

| Devices | Page | Application | Standards | Used in | | |
|--|-------|---|--|---------------------------|-----------------------|----------|
| | | | | Non-residential buildings | Residential buildings | Industry |
|  <p>7KM PAC expansion modules</p> | 11/23 | <ul style="list-style-type: none"> The 7KM PAC Switched Ethernet PROFINET expansion module is used to connect the 7KM PAC3200 and 7KM PAC4200 measuring devices and 3VA molded case circuit breakers to Switched Ethernet PROFINET (PROFInergy). The 7KM PAC PROFIBUS DP expansion module is used to connect the 7KM PAC3200 and 7KM PAC4200 measuring devices and 3VA molded case circuit breakers to the PROFIBUS DPV1 The 7KM PAC RS 485 expansion module is used to connect simple devices with RS 485 interface, such as the 7KM PAC3200 and 3VA molded case circuit breaker, and it supports the Modbus RTU protocol. The 7KM PAC 4DI/2DO expansion module is used to expand the 7KM PAC4200 measuring device to up to 10 digital inputs and 6 digital outputs. | IEC 61784-2 IEC 61158 RS 485 IEC 62053-31 | ✓ | -- | ✓ |
| 7KT PAC measuring devices | | | | | | |
|  <p>7KT PAC1500 three-phase measuring device 7KT154</p> | 11/26 | Measurement of consumption data in three-phase systems of plant sections, offices or holiday apartments. | EN 50470-1, EN 50470-3 EN 62052-23, EN 62053-31 | ✓ | ✓ | ✓ |
|  <p>7KT PAC1500 single-phase measuring device 7KT153</p> | 11/28 | For the measurement of consumption data in single-phase systems, e.g. in industrial plants, offices and apartments in apartment blocks. | EN 50740-1, EN 50470-3, EN 62053-31 | ✓ | ✓ | ✓ |
|  <p>7KT PAC expansion modules 7KT19</p> | 11/29 | Communication interfaces with IrDA infrared interface for 7KT PAC1500 measuring devices. Modules are available for the following bus systems: <ul style="list-style-type: none"> M-Bus Modbus RTU RS 485 (7KT1391 LAN coupler connection) KNX/EIB | EN 13321-1, EN 13757 ISO/IEC 14543-3 EN 50090 | ✓ | ✓ | ✓ |
|  <p>7KT LAN couplers</p> | 11/30 | Web server with 2 GB internal storage, for up to 30 7KT15.. measuring devices Global view and Excel export of current consumption data via LAN or Internet using a web browser such as Firefox. | IEEE 802 | ✓ | -- | ✓ |

| Devices | Page | Application | Standards | Used in | | | |
|---|--|-------------|--|---|-----------------------|----------|---|
| | | | | Non-residential buildings | Residential buildings | Industry | |
| Other measuring devices | | | | | | | |
|  | Digital measuring devices 7KT111, 7KT112 | 11/32 | Voltage and current measurement with large 3-digit LEDs for monitoring incoming/outgoing currents and device currents in order to prevent plant overload. | DIN 43751-1, DIN 43751-2 | ✓ | -- | ✓ |
|  | Time and pulse counters for standard rail mounting 7KT58 | 11/34 | For monitoring operating hours and starting operations for the planning of preventative maintenance tasks and preventing sudden shutdowns | IEC 60255-6, EN 60255-6 (VDE 0435-301) UL 94 | ✓ | ✓ | ✓ |
|  | Time counters for front-panel mounting 7KT55, 7KT56 | 11/36 | For monitoring operating hours and starting operations for planning preventative maintenance tasks and preventing sudden shutdowns. | IEC 60255-6, EN 60255-6 (VDE 0435-301) | ✓ | ✓ | ✓ |
| Accessories | | | | | | | |
|  | 4NC current transformers | 11/37 | Window-type current transformers/pin-wound transformers, particularly suitable for long measuring leads, low cable losses | EN 60044-1, VDE 0414-44-1 | ✓ | -- | ✓ |
|  | 7KT12 current transformers | 11/40 | Straight-through transformers for installation in distribution boards and non-contact measuring of primary currents. Ideal for combination with switch disconnectors, measuring devices and counters. | IEC 60044-1, EN 60044-1 (VDE 0414 T 44-1) | ✓ | -- | ✓ |
|  | 7KT90 measuring selector switches | 11/41 | For switching over the phases for voltmeters and ammeters | | ✓ | -- | ✓ |

Measuring Devices and Power Monitoring

7KM PAC Measuring Devices

7KM PAC3100 measuring devices

Overview



The 7KM PAC measuring devices are used to measure and display all relevant system parameters in low-voltage power distribution. They can be used for both single-phase and multi-phase measurements in 3 and 4-conductor power supply systems (TN, TT, IT).



They record energy values for main distribution boards, electrical branches or individual loads precisely and reliably, and also supply key measured values for assessment of the state of the plant.

The 7KM PAC3100 measuring device is fitted with an integrated Modbus RTU interface via RS 485, no expansion module is required.

Benefits

- Simple mounting and commissioning
- High IP65 degree of protection (front side, when installed) permits usage in extremely dusty and wet environments
- Intuitive operation using 4 function buttons and multilingual plain text displays
- Easy adaptation to different systems using integrated and optional
 - Digital inputs and outputs
 - Communication interfaces
- Worldwide use
 - At least 8 languages
 - International approvals
 - Developed and tested to European and international standards
- Low mounting depth
- User-friendly, free configuration software powerconfig, [see below](#)

Selection and ordering data

| Version | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. kg |
|---|----|--|---|-------------------------|-----------------|-----|-----------------------------------|
|  7KM PAC3100 measuring device Control panel instrument, 96 x 96 mm Screw connections for current and voltage connection AC/DC wide-range power supply unit U_{AUX} : 100 ... 240 V AC \pm 10 %, 50/60 Hz 110 ... 250 V DC \pm 10 % Measuring inputs U_E : max. 480/277 V 3 AC, 50/60 Hz I_E : 15 A | | | | | | | |
| | | Screw connection |  | | | | |
| | | 7KM3133-0BA00-3AA0 | | 1 | 1 unit | 1DD | 0.469 |

7KM3133-0BA00-3AA0

More information

For current transformers, [see page 11/37](#) or [see chapter "Switch Disconnectors"](#)

For other accessories, [see page 11/22](#)

powerconfig is available free of charge at <http://support.automation.siemens.com/WW/view/en/63452759>

For more information about powerconfig, [see chapter "Software"](#)

Overview



The 7KM PAC measuring devices are used to measure and display all relevant system parameters in low-voltage power distribution. They can be used for both single-phase and multi-phase measurements in 3 and 4-conductor power supply systems (TN, TT, IT).

They record energy values for main distribution boards, electrical branches or individual loads precisely and reliably, and supply key measured values for assessment of the state of the plant and the quality of the power supply.

The 7KM PAC3200 measuring device is fitted with an integrated Modbus TCP interface via Ethernet, no expansion module is required.

Benefits

- Simple mounting and commissioning
- High IP65 degree of protection (front side, when installed) permits usage in extremely dusty and wet environments
- Intuitive operation using 4 function buttons and multilingual plain text displays
- Easy adaptation to different systems using integrated and optional
 - Digital inputs and outputs
 - Communication interfaces
- Worldwide use
 - At least 8 languages
 - International approvals
 - Developed and tested to European and international standards
- Low mounting depth

Additional performance characteristics of the 7KM PAC3200







- Precise energy measurement
- Versatile system integration
 - Integrated Ethernet interface
 - Optional communication modules available
 - Multifunctional digital inputs and outputs
 - Limit monitoring
- Can be connected directly to power supply systems up to 690 V AC (UL-L) and CATIII without voltage transformers (with the exception of devices with power supply units with extra-low voltage)
- User-friendly configuration software powerconfig, [see chapter "Software"](#)

Measuring Devices and Power Monitoring

7KM PAC Measuring Devices

7KM PAC3200 measuring devices

Selection and ordering data

| Version | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. kg |
|---|----|--|-----------------|-------------------------|-----------------|-----|-----------------------------------|
|  <p>7KM PAC3200 measuring device</p> <p>Control panel instrument, 96 x 96 mm Screw connections for current and voltage connection</p> <p>AC/DC wide-range power supply unit U_{AUX}: 95 ... 240 V AC \pm 10 %, 50/60 Hz 110 ... 340 V DC \pm 10 %</p> <p>Measuring inputs U_E: max. 690/400 V 3 AC, 50/60 Hz I_E: /1 A or /5 A</p> <p>7KM2112-0BA00-3AA0</p> | | Screw connection  | | | | | |
| | | 7KM2112-0BA00-3AA0 | | 1 | 1 unit | 1DD | 0.451 |
|  <p>7KM PAC3200 measuring device</p> <p>Control panel instrument, 96 x 96 mm Screw connections for current and voltage connection</p> <p>DC power supply unit with extra-low voltage U_{AUX}: 22 ... 65 V DC \pm 10 %</p> <p>Measuring inputs U_E: max. 500/289 V 3 AC, 50/60 Hz I_E: /1 A or /5 A</p> <p>7KM2111-1BA00-3AA0</p> | | Screw connection  | | | | | |
| | | 7KM2111-1BA00-3AA0 | | 1 | 1 unit | 1DD | 0.459 |
|  <p>7KM PAC3200 measuring device</p> <p>Control panel instrument, 96 x 96 mm Ring cable lug connections for current and voltage connection</p> <p>AC/DC wide-range power supply unit: U_{AUX}: 95...240 V AC \pm 10 %, 50/60 Hz 110...340 V DC \pm 10 %</p> <p>Measuring inputs U_E: max. 690/400 V 3 AC, 50/60 Hz I_E: /1 A or /5 A</p> <p>7KM2112-0BA00-2AA0</p> | | Ring cable lug connection  | | | | | |
| | | 7KM2112-0BA00-2AA0 | | 1 | 1 unit | 1DD | 0.470 |

More information

For current transformers, [see page 11/37](#)
or see chapter "Switch Disconnectors"

For other accessories, [see page 11/22](#)

powerconfig is available free of charge at
<http://support.automation.siemens.com/WWW/view/en/63452759>

For more information about powerconfig, [see chapter "Software"](#).

Overview



The 7KM PAC measuring devices are used to measure and display all relevant system parameters in low-voltage power distribution. They can be used for both single-phase and multi-phase measurements in 3 and 4-conductor power supply systems (TN, TT, IT).

They record energy values for main distribution boards, electrical branches or individual loads precisely and reliably, and supply key measured values for assessment of the state of the plant and the quality of the power supply.

The 7KM PAC4200 measuring device is fitted with an integrated Modbus TCP interface via Ethernet, no expansion module is required.

Benefits

- Simple mounting and commissioning
- High IP65 degree of protection (front side, when installed) permits usage in extremely dusty and wet environments
- Intuitive operation using 4 function buttons and multilingual plain text displays
- Easy adaptation to different systems using integrated and optional
 - Digital inputs and outputs
 - Communication interfaces
- Worldwide use
 - At least 8 languages
 - International approvals
 - Developed and tested to European and international standards
- Low mounting depth

Additional performance characteristics of the 7KM PAC4200:

- Precise energy measurement
- Versatile system integration
 - Integrated Ethernet interface
 - Optional communication modules available
 - Multifunctional digital inputs and outputs
 - Limit monitoring
- Can be connected directly to power supply systems up to 690 V AC (UL-L) and CATIII without voltage transformers (with the exception of devices with power supply units with extra-low voltage)
- User-friendly configuration software powerconfig, [see chapter "Software"](#)
- Monitoring of plant status and power supply quality
 - Basic information for evaluating the power supply quality
 - Logging of plant history in the form of operation, control and system-related events
- Recording of the power range through power averaging (load profile)
- Daily energy meters for apparent, active and reactive energy across 365 days for cut-off date assessment
- Detection of gas, water, compressed air or other energy sources via pulse counter to the digital inputs
- Can be expanded using modules to up to 10 digital inputs and 6 digital outputs
- Counters for apparent, active and reactive energy for the precise detection of the power consumption of a partial process or manufacturing process
- 10/100 Mbit/s Ethernet interface with gateway function for the easy connection of devices with serial RS 485 interface via expansion module 7KM PAC RS 485 to an Ethernet network
- Comprehensive user-friendly indicators, such as user-defined displays, bar and status indicators, phase diagram and list and histogram graphics
- Satisfies the accuracy requirements of class 0.2S high-precision meters used by power supply companies according to IEC 62053-22, which are normally reserved for exacting industrial applications

Measuring Devices and Power Monitoring

7KM PAC Measuring Devices

7KM PAC4200 measuring devices

Selection and ordering data

| Version | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS* P. unit | PG | Weight per PU approx. kg |
|---|----|---|-----------------|-------------------------|----------------|-----|-----------------------------------|
|   <p>7KM PAC4200 measuring device</p> <p>Control panel instrument, 96 x 96 mm Screw connections for current and voltage connection</p> <p>AC/DC wide-range power supply unit U_{AUX}: 95 ... 240 V AC \pm 10 %, 50/60 Hz 110 ... 340 V DC \pm 10 %</p> <p>Measuring inputs U_E: max. 690/400 V 3 AC, 50/60 Hz I_E: /1 A or /5 A</p> <p>7KM4212-0BA00-3AA0</p> | | Screw connection  | | 1 | 1 unit | 1DD | 0.543 |
|   <p>7KM PAC4200 measuring device</p> <p>Control panel instrument, 96 x 96 mm Screw connections for current and voltage connection</p> <p>DC power supply unit with extra-low voltage U_{AUX}: 22 ... 65 V DC \pm 10 %</p> <p>Measuring inputs U_E: max. 500/289 V 3 AC, 50/60 Hz I_E: /1 A or /5 A</p> <p>7KM4211-1BA00-3AA0</p> | | Screw connection  | | 1 | 1 unit | 1DD | 0.537 |
|   <p>7KM PAC4200 measuring device</p> <p>Control panel instrument, 96 x 96 mm Ring cable lug connections for current and voltage connection</p> <p>AC/DC wide-range power supply unit: U_{AUX}: 95 ... 240 V AC \pm 10 %, 50/60 Hz 110 ... 340 V DC \pm 10 %</p> <p>Measuring inputs U_E: max. 690/400 V 3 AC, 50/60 Hz I_E: /1 A or /5 A</p> <p>7KM4212-0BA00-2AA0</p> | | Ring cable lug connection  | | 1 | 1 unit | 1DD | 0.544 |

More information


For current transformers, [see page 11/37](#)
or [see chapter "Switch Disconnectors"](#)

For other accessories, [see page 11/22](#)

powerconfig is available free of charge at
<http://support.automation.siemens.com/WWW/view/en/63452759>

For more information about powerconfig, [see chapter "Software"](#)

Overview

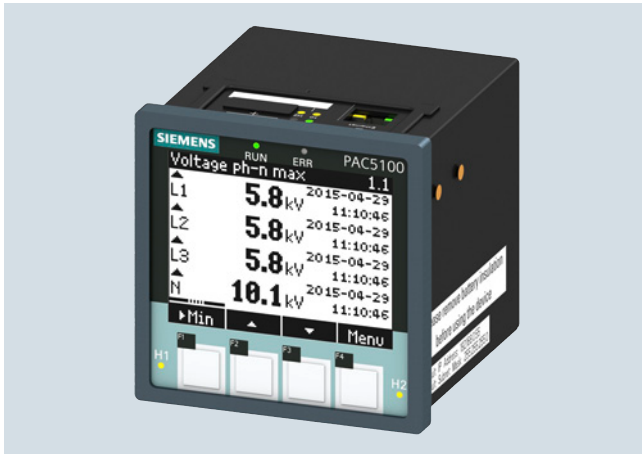

7KM PAC5100 measuring device





The 7KM PAC measuring devices are used to measure and display all relevant system parameters in low-voltage power distribution. They can be used for both single-phase and multi-phase measurements in 3 and 4-conductor power supply systems (TN, TT, IT). They record energy values for main distribution boards, electrical branches or individual loads precisely and reliably, and supply key measured values for assessment of the state of the plant and the quality of the power supply.

The 7KM PAC5100 measuring device has an integrated Modbus TCP interface via Ethernet and a web server for parameterization, visualization and data management.

Benefits

- Simple mounting and commissioning
- Intuitive operation via 4 function keys
- Integrated web server for parameterization, display and evaluation
- 4 parameterizable LEDs
- Worldwide use
 - International approvals
 - Developed and tested to European and international standards
- Low mounting depth
- Precise energy measurement
- Versatile system integration
 - Integrated Ethernet interface
 - Multifunctional digital outputs
 - Limit monitoring
- Can be directly connected to power supply networks up to 690 V AC (UL-L), CATIII without voltage transformer
- Electrically isolated voltage inputs
- Monitoring of plant status and power supply quality
 - Basic information for evaluating the power supply quality
 - Logging of plant history in the form of operation, control and system-related events
- Energy counters for apparent energy, active energy, reactive energy, as well as import, supply, inductive and capacitive
- Comprehensive user-friendly indicators, such as user-defined displays, bar and status indicators
- Measurement up to the 40th individual harmonic of current and voltage

Selection and ordering data

| Version | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. kg |
|---|--|--|-----------------|-------------------------|-----------------|-----|-----------------------------------|
|  7KM PAC5100 measuring device Control panel instrument, 96 x 96 mm Screw connections for current and voltage connection AC/DC wide-range power supply unit U_{AUX} : 110 ... 230 V AC \pm 10 %, 50/60 Hz 24 ... 250 V DC \pm 10 % Measuring inputs U_G : max. 690/400 V 3 AC, 50/60 Hz I_e : /1 A or /5 A | Screw connection  | 7KM5212-6BA00-1EA2 | | 1 | 1 unit | 1DD | 0.807 |
| | | | | | | | |
|  7KM PAC5100 measuring device Standard rail instrument without display Screw connections for connecting current and voltage AC/DC wide-range power supply unit U_{AUX} : 110 ... 230 V AC \pm 10 %, 50/60 Hz 24 ... 250 V DC \pm 10 % Measuring inputs U_G : max. 690/400 V 3 AC, 50/60 Hz I_e : /1 A or /5 A | Screw connection  | 7KM5212-6CA00-1EA8 | | 1 | 1 unit | 1DD | 0.753 |
| | | | | | | | |

More information


For current transformers, see page 11/37
or see chapter "Switch Disconnectors"

Measuring Devices and Power Monitoring

7KM PAC Measuring Devices

7KM PAC5200 measuring devices **NEW**

Overview

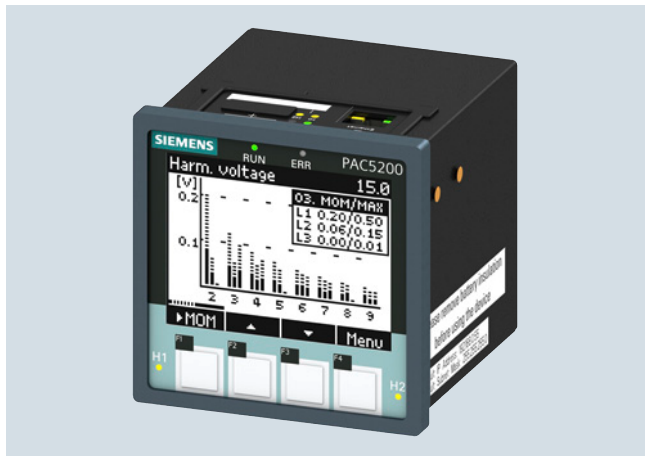

7KM PAC5200 measuring device

The 7KM PAC measuring devices are used to measure and display all relevant system parameters in low-voltage power distribution. They can be used for both single-phase and multi-phase measurements in 3 and 4-conductor power supply systems (TN, TT, IT).





They record energy values for main distribution boards, electrical branches or individual loads precisely and reliably, and supply key measured values for assessment of the state of the plant and the quality of the power supply.

The 7KM PAC5200 power quality measuring device has an integrated Modbus TCP interface via Ethernet and a web server for parameterization, visualization and data management.

Benefits

- Simple mounting and commissioning
- Intuitive operation via 4 function keys
- 4 parameterizable LEDs
- Integrated web server for parameterization, display and evaluation
- Worldwide use
 - International approvals
 - Developed and tested to European and international standards
- Low mounting depth
- Precise energy measurement
- Versatile system integration
 - Integrated Ethernet interface
 - Multifunctional digital outputs
 - Limit monitoring
- Can be directly connected to power supply networks up to 690 V AC (UL-L), CATIII without voltage transformer
- Electrically isolated voltage inputs
- Monitoring the plant status and the power supply quality:
 - Basic information for evaluating the power supply quality
 - Logging of plant history in the form of operation, control and system-related events
 - Flicker acc. to IEC 61000-4-15
- Energy counters for apparent energy, active energy, reactive energy, as well as import, supply, inductive and capacitive
- Comprehensive user-friendly indicators, such as user-defined displays, bar and status indicators
- Measurement up to the 40th individual harmonic of current and voltage
- Integrated 2 GB SD card for recorder functions
- Flexible recorder:
 - Measured value recorder
 - Trend recorder
 - Event recorder
 - Fault recorder
- Integrated PQ recording and reporting in accordance with EN 50160
- Data export:
 - COMTRADE
 - PQDif
- Classification of events
- ITIC /CBEMA evaluation in the device

Selection and ordering data

| Version | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. kg |
|--|----|--|-----------------|-------------------------|-----------------|-----|-----------------------------------|
|  <p>7KM PAC5200 measuring device Control panel instrument, 96 x 96 mm Screw connections for current and voltage connection AC/DC wide-range power supply unit U_{AUX}: 110 ... 230 V AC \pm 10 %, 50/60 Hz 24 ... 250 V DC \pm 10 % Measuring inputs U_e: max. 690/400 V 3 AC, 50/60 Hz I_e: /1 A or /5 A</p> <p>7KM5412-6BA00-1EA2</p> | | Screw connection  7KM5412-6BA00-1EA2 | | 1 | 1 unit | 1DD | 0.809 |
| | | | | | | | |
|  <p>7KM PAC5200 measuring device Standard rail instrument without display Screw connections for connecting current and voltage AC/DC wide-range power supply unit U_{AUX}: 110 ... 230 V AC \pm 10 %, 50/60 Hz 24 ... 250 V DC \pm 10 % Measuring inputs U_e: max. 690/400 V 3 AC, 50/60 Hz I_e: /1 A or /5 A</p> <p>7KM5412-6CA00-1EA8</p> | | Screw connection  7KM5412-6CA00-1EA8 | | 1 | 1 unit | 1DD | 0.754 |
| | | | | | | | |

More information

For current transformers, see page 11/37
or see chapter "Switch Disconnectors"





Measuring Devices and Power Monitoring

7KM PAC Measuring Devices

Accessories for 7KM PAC

Selection and ordering data

For 7KM PAC3100/3200/4200

| | Version | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. kg |
|---|---|----|--|-----------------|-------------------------|-----------------|-----|-----------------------------------|
|  | 7KM PAC TMP2 standard mounting rail adapter Two-tier adapter for mounting a measuring device on a standard mounting rail • Front display • For manual intervention | | 7KM9900-0XA00-0AA0 | | 1 | 1 unit | 1DD | 0.397 |
|  | 7KM PAC TMP mounting plate Adapter for mounting a measuring device on standard mounting rail • Display faces backwards towards standard mounting rail • Readout and evaluation of measurements solely via mains operation | | 7KM9900-0YA00-0AA0 | | 1 | 1 unit | 1DD | 0.146 |
|  | Compact holder Device holder for 7KM PAC3100/3200/4200: • 10 holders for 5 PAC devices • For seamless side-by-side mounting of the devices (without spaces) | | 7KM9900-0GA00-0AA0 | | 1 | 1 unit | 1DD | 0.148 |
|  | 7KM PAC spare parts Spare parts comprising: • Device holders for panel mounting (2X) • Screw terminal for connection of voltage inputs • Screw terminal for connection of current inputs • Terminal block inputs/outputs for 7KM PAC3100/4200 • Terminal block inputs/outputs for 7KM PAC3200 • RS 485 terminal block for 7KM PAC3100 | | 7KM9900-0SA00-0AA0 | | 1 | 1 unit | 1DD | 0.118 |

More information

Current transformers

For current transformers, [see page 11/37](#)

Software components

For more information about the software components, [see chapter "Software"](#) and on the Internet at www.siemens.com/lowvoltage/powermonitoring

More information

More information is available on the Internet at: www.siemens.com/lowvoltage/powermonitoring

Overview



Expansion modules are used as communication interfaces and for expanding the digital inputs/outputs for 7KM PAC measuring devices.

The expansion modules are plugged in at the back of the measuring device. The device identifies the module automatically and presents the relevant parameters for this module for selection in the parameterization menu.

Versions

The following expansion modules are available (shown from left to right in the figure on the left):

- 7KM PAC Switched Ethernet PROFINET expansion module
- 7KM PAC PROFIBUS DP expansion module
- 7KM PAC RS 485 expansion module
- 7KM PAC 4DI/2DO expansion module

Connection for 3VA molded case circuit breakers

The following expansion modules can be mounted on the front of the COM800/COM100 data breaker servers of the 3VA molded case circuit breaker:

- 7KM PAC Switched Ethernet PROFINET and
- 7KM PAC PROFIBUS DP

For further details, see chapter "Molded Case Circuit Breakers" or in the manual at <http://support.automation.siemens.com/WW/view/en/90318775>

More information

For more information about the software components, see chapter "Software" and on the Internet at www.siemens.com/lowvoltage/powermonitoring

Version

Use in

7KM PAC

PAC3100

PAC3200

PAC4200

PAC5100

PAC5200

3VA

COM800/
COM100

7KM PAC expansion modules



7KM PAC Switched Ethernet PROFINET expansion module

The 7KM PAC Switched Ethernet PROFINET expansion module is a plug-in communication module for 7KM PAC3200 and 7KM PAC4200 measuring devices and 3VA molded case circuit breakers.

It provides the following features:

- Standardized PROFINET interface to the measured quantities
- The measured quantities can be individually selected using a GSDML file. This permits use of cost-effective S7 CPUs
- Easy parameter assignment using the device display and STEP 7
- Integrated Ethernet switching allows networking with short cables without additional switches
- Direct integration in production machine networks using IRT (IRT = Isochronous-Real-Time)
- Full support of PROFINET IO (DHC, DNS, SNMP, SNTP)
- Device replacement without PG in the PROFINET assembly using LLDP
- Deterministic reversing time through ring redundancy (MRP)
- Modbus TCP communication
- Communication with powermanager or powerconfig
- 2 x Ethernet (RJ45) sockets
- Transmission rates 10 and 100 Mbit/s
- Protocols PROFINET IO, PROFINET and Modbus TCP
- No external auxiliary power necessary
- Additional display via the device display and via LEDs on the module

All measured quantities from 7KM PAC3200 and 7KM PAC4200 can be individually selected and cyclically transmitted by means of the GSDML file. This enables optimum use of the process image of the PROFINET controller, e.g. CPU 315-2 PN/DP of SIMATIC S7.




The measured quantities can be read out in acyclic mode using PROFINET, a PNO protocol profile. Thanks to PROFINET, it is possible to assemble a power monitoring system with devices from various manufacturers using PROFINET.

| | PAC3100 | PAC3200 | PAC4200 | PAC5100 | PAC5200 | COM800/ COM100 |
|--|---------|---------|---------|---------|---------|-------------------|
| | -- | ✓ | ✓ | -- | -- | ✓ |





Measuring Devices and Power Monitoring

7KM PAC Measuring Devices

7KM PAC expansion modules

| Version | Use in | | | | | |
|--|---------|---------|---------|---------|---------|-------------------|
| | 7KM PAC | | | | | 3VA |
| | PAC3100 | PAC3200 | PAC4200 | PAC5100 | PAC5200 | COM800/ COM100 |
|  <p>7KM PAC PROFIBUS DP expansion module</p> <p>The 7KM PAC PROFIBUS DP expansion module is a plug-in communication module for 7KM PAC3200 and 7KM PAC4200 measuring devices and 3VA molded case circuit breakers.</p> <p>The 7KM PAC PROFIBUS DP expansion module has the following features:</p> <ul style="list-style-type: none"> • Plug-in communication module for measuring devices for connection to PROFIBUS DPV1 • For 7KM PAC3200 and 7KM PAC4200 • Parameterizable via device front or using parameterization software • Data can be transferred both cyclically and acyclically via PROFIBUS DPV1 • Easy engineering thanks to integration in SIMATIC STEP 7 and/or simple integration via GSD file for other programming systems • Optimum use of process image of a control system for selection of individual measured quantities for cyclical transfer • Supports all baud rates from 9.6 kbit/s up to 12 Mbit/s • Connection through 9-pole Sub-D connector according to IEC 61158 • No external auxiliary power necessary • Additional display via the device display and via LEDs on the module | -- | ✓ | ✓ | -- | -- | ✓ |
|  <p>7KM PAC RS 485 expansion module</p> <p>The 7KM PAC RS 485 expansion module has the following features:</p> <ul style="list-style-type: none"> • Plug-in 7KM PAC RS 485 communication module for 7KM PAC3200 and 7KM PAC4200 measuring devices, and 3VA molded case circuit breakers • Parameterizable via device front or using parameterization software • Support for the Modbus RTU protocol • Plug and play • Supports transmission rates of 4.8/9.6/19.2 and 38.4 kbit/s • Connection by means of 6-pole screw terminals • No external auxiliary power necessary • Status indication by LED on the module • The 7KM PAC RS 485 expansion module is required for the gateway function of the 7KM PAC4200 for communication with simple devices with RS 485 interface, such as the 7KM PAC3100, via Ethernet (Modbus TCP). | -- | ✓ | ✓ | -- | -- | -- |
|  <p>7KM PAC 4DI/2DO expansion module</p> <p>The 7KM PAC 4DI/2DO expansion module is used to expand the 7KM PAC4200 measuring device to up to 10 digital inputs and 6 digital outputs and offers the following features:</p> <ul style="list-style-type: none"> • Up to two 7KM PAC 4DI/2DO modules can be plugged onto a 7KM PAC4200 • The 7KM PAC 4DI/2DO expansion modules mean that the internal digital inputs and outputs can be expanded by up to 8 inputs and 4 outputs. • The 7KM PAC 4DI/2DO expansion modules can be configured locally at the front of the device or via the powerconfig parameterization software • The digital inputs can be used without the need for an external power supply as they are self-powered. This is particularly useful for the integration of non-electric measuring devices, such as water or compressed-air counters • All functions of the integrated multifunctional inputs/outputs on the 7KM PAC4200 are also available in the 7KM PAC 4DI/2DO expansion module • Inputs and outputs can be used as an S0 interface conforming to IEC 62053-31 • The connection is made via a 9-pole screw terminal • No external auxiliary power supply is required | -- | -- | ✓ | -- | -- | -- |

Selection and ordering data

| Version | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. kg |
|---|----|--|-----------------|-------------------------|-----------------|-----|-----------------------------------|
|  7KM PAC Switched Ethernet PROFINET expansion module Expansion module for 7KM PAC3200 and 7KM PAC4200 (PROFInergy) and COM100/800 (3VA) breaker data server 7KM9300-0AE01-0AA0 | | 7KM9300-0AE01-0AA0 | | 1 | 1 unit | 1DD | 0.070 |
|  7KM PAC PROFIBUS DP expansion module Expansion module for 7KM PAC3200 and 7KM PAC4200 (PROFIBUS DPV1) and COM100/800 (3VA) breaker data server 7KM9300-0AB01-0AA0 | | 7KM9300-0AB01-0AA0 | | 1 | 1 unit | 1DD | 0.079 |
|  7KM PAC RS 485 expansion module Expansion module for 7KM PAC3200 and 7KM PAC4200 (Modbus RTU) and COM100/800 (3VA) breaker data server 7KM9300-0AM00-0AA0 | | 7KM9300-0AM00-0AA0 | | 1 | 1 unit | 1DD | 0.074 |
|  7KM PAC 4DI/2DO expansion module Expansion module for 7KM PAC4200 7KM9200-0AB00-0AA0 | | 7KM9200-0AB00-0AA0 | | 1 | 1 unit | 1DD | 0.073 |

Measuring Devices and Power Monitoring

7KT PAC Measuring Devices

7KT PAC1500 three-phase measuring devices

Overview



7KT PAC1500 three-phase measuring devices for direct connection up to 80 A / 125 A

The measuring devices (power meters) are used to record the amount of electrical energy and power exported and imported. Siemens compact measuring devices are designed as modular devices for alternating current and can be mounted on standard mounting rails. They comply with the metering equipment standard EN 50470 (Part 1 and 3) and come with an LCD display.

The three-phase measuring devices for direct connection are available up to 125 A and in versions with transformer connections (.../5 A to 10000/5 A).

The measuring devices store active and reactive energy and all comply with accuracy class 1 (for active energy).

All measuring devices have a pulse output (S0) and are designed for 2-tariff measurements. The MID versions comply with the new Measuring Instruments Directive 2004/22/EC.

The measuring devices also have an integrated optical interface (IrDA) for connecting communication modules, which enables their integration in a range of other systems, such as power management systems.

Technical specifications


| 7KT PAC1500 three-phase measuring device | | | 7KT1540 7KT1542 | 7KT1543 7KT1545 | 7KT1546 7KT1548 |
|---|---|------------------------------------|--|-----------------------------|---------------------|
| Standards | | | EN 50470-1, EN 50470-3, EN 62053-23, EN 62053-31 | | |
| Connection | | | | | |
| • Direct connection | | | -- | 80 A | 125 A |
| • Transformer current connection | | | .../5 A | -- | -- |
| General data | | | | | |
| • Enclosure | Acc. to DIN 43880 | MW (1 MW = 18 mm) | 4 | 4 | 6 |
| • Mounting | Acc. to EN 60715 | | 35 mm | | |
| • Mounting height | | mm | 70 | | |
| Function | | | | | |
| • Connection | Single-phase or three-phase | Number of conductors | 4 | 2 ... 4 | 2 ... 4 |
| • Storage of setting and counter reading | Via (EEPROM) | | Yes | Yes | Yes |
| • Tariffs | For active and reactive energy | | T1/T2 | T1/T2 | T1/T2 |
| Supply (through measuring terminals) | | | | | |
| • Rated control supply voltage U_n | | V AC | 230 | | |
| • Voltage range | | V | 110... 276 | | |
| • Rated frequency f_n | | Hz | 50 | | |
| Measuring accuracy (at 23 ± 1 °C) | | | | | |
| • Active energy and active power | Acc. to EN 50470-3 | | Class B | | |
| • Reactive energy and reactive power | Acc. to EN 62053-23 | | Class 2 | | |
| Measuring inputs | | | | | |
| • Connection type | | | Transformer TA-TC .../5 A | Direct | Direct |
| • Terminal capacitance, operational and main current paths | Rigid, min. (max.) Flexible min. (max.) | mm ² mm ² | 1.5 (6) 1.5 (6) | 1.5 (35) 1.5 (35) | 5 (50) 5 (50) |
| • Voltage U_n | Phase/phase Phase/N | V V | 400 230 | | |
| • Operating range voltage | Phase/phase Phase/N | V V | 190 ... 480 110 ... 276 | | |
| • Current I_{ref} | | A | -- | 5 | 5 |
| • Current I_n | | A | 5 | -- | -- |
| • Current I_{min} | | A | 0.05 | 0.25 | 0.25 |
| • Operating range current ($I_{st} ... I_{max}$) | Direct connection Transformer connection | A A | -- 0.003 ... 6 | 0.015 ... 80 -- | 0.020 ... 125 -- |
| • Transformer current | Primary current of the transformer Smallest input step | A A | 5 ... 10000 5 | -- -- | -- -- |
| • Input ripple form | | | Sinusoidal | | |
| • Operational starting current I_{st} | | mA | 3 | 15 | 20 |
| S0 interface | | | | | |
| • Pulse outputs for absorbed active and reactive energy T1 + T2 | | | Yes | | |
| • Pulse count | For input current I_{max} Automatic for transformers | Pulses/kWh Pulses/kWh | -- 100 - 10 - 1 | 500 -- | 500 -- |
| IR interface | | | | | |
| • At the side for connecting communication modules | | | | M-Bus/Modbus RTU/RS 485/KNX | |

Measuring Devices and Power Monitoring

7KT PAC Measuring Devices

7KT PAC1500 three-phase measuring devices

Selection and ordering data

| | U_n | I_{max} | Mount- ing width | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. | |
|---|--|-----------|------------------------|----------------|--|-------------------------|----------------------------|-----------------|--------|-----------------------------|-------|
| | V AC | A AC | | | | | | | | | MW |
| 7KT PAC1500 three-phase measuring device | | | | | | | | | | | |
| Digital measuring device | | | | | | | | | | | |
|  | • For transformer connection, double tariff | | 230 | Transformer /5 | 4 | 7KT1540 | 1 | 1 unit | 1DD | 0.257 | |
| | • For transformer connection, double tariff, MID | | 230 | Transformer /5 | 4 | 7KT1542 | 1 | 1 unit | 1DD | 0.254 | |
| | • For direct connection, double tariff | | 230 | 80 | | 4 | 7KT1543 | 1 | 1 unit | 1DD | 0.409 |
| | • For direct connection, double tariff, MID | | 230 | 80 | | 4 | 7KT1545 | 1 | 1 unit | 1DD | 0.408 |
| | • For direct connection, double tariff | | 230 | 125 | | 6 | 7KT1546 | 1 | 1 unit | 1DD | 0.705 |
| | • For direct connection, double tariff, MID | | 230 | 125 | | 6 | 7KT1548 | 1 | 1 unit | 1DD | 0.710 |

Measuring Devices and Power Monitoring

7KT PAC Measuring Devices

7KT PAC1500 single-phase measuring devices

Overview



The 7KT PAC1500 single-phase measuring devices (power meters) are used to record the amount of electrical energy and power exported and imported. They comply with the metering equipment standard EN 50470 (Part 1 and 3) and come with an LCD display.

The 7KT PAC1500 single-phase measuring devices for direct connection are available up to 80 A. They store active and reactive energy, and all comply with accuracy class 1 (for active energy).


All measuring devices have a pulse output (S0) and are designed for 1-tariff or 2-tariff measurements, depending on the version.

The MID versions comply with the new Measuring Instruments Directive 2004/22/EC. The measuring devices (with the exception of 7KT1530) also have an integrated optical interface (IrDA) for connecting communication modules.


Technical specifications

| 7KT PAC1500 measuring device, single-phase direct connection up to 80 A | | | 7KT1530 | 7KT1531 7KT1533 |
|--|------------------------|-----------------|--|--------------------|
| Standards | | | EN 50470-1, EN 50470-3, EN 62053-23, EN 62053-31 | |
| General data | | | | |
| • Enclosure | Acc. to DIN 43880 | MW | 2 | |
| • Mounting | Acc. to EN 60715 | | 35 mm | |
| • Mounting height | | mm | 70 | |
| Function | | | | |
| • Operating mode | Single-phase loads | Conductors | 2 | |
| • Storage of setting and counter reading | Via (EEPROM) | | Yes | |
| • Tariff | For active energy | | T1 | T1 + T2 |
| | For reactive energy | | T1 | T1 + T2 |
| Supply (through measuring terminals) | | | | |
| • Rated control supply voltage U_n | | V AC | 230 | |
| • Voltage range | | V | 110 ... 276 | |
| • Rated frequency f_n | | Hz | 50 | |
| Measuring accuracy (at 23 ± 1 °C) | | | | |
| • Active energy and active power | Based on nominal value | | Class B | |
| • Reactive energy and reactive power | Acc. to EN 50470-3 | | Class 2 | |
| | Acc. to EN 62053-23 | | | |
| Measuring inputs | | | | |
| • Connection type | Phase/N | | Direct | |
| • Terminal capacitance, operational and main current paths | Rigid, min. (max.) | mm ² | 1.5 (35) | 1.5 (35) |
| | Flexible min. (max.) | mm ² | 1.5 (35) | 1.5 (35) |
| • Operating range voltage | Phase/N | V AC | 110... 276 | |
| • Current I_{ref} | | A | 5 | |
| • Current I_{min} | | A | 0.25 | |
| • Operating range current ($I_{st} \dots I_{max}$) | Direct connection | A | 0.015 ... 80 | |
| • Current waveform | | | Sinusoidal | |
| • Operational starting current I_{st} | | mA | 15 | |
| S0 interface | | | Acc. to EN 62053-31 | |
| • Pulse outputs for absorbed active and reactive energy | | | Yes | |
| • Pulse count | | Pulses/kWh | 1000 | |
| IR interface | | | | |
| • At the side for connecting communication modules (M-Bus/Modbus RTU/RS 485/KNX) | | | -- | Yes |

Selection and ordering data

| | U_n | I_{max} | Mount- ing width | DT | Article No. www.siemens.com/ product?Article.No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. kg |
|---|--|-----------|------------------------|---------|--|-----------------|----------------------------|-----------------|-------|-----------------------------------|
| | V AC | A AC | MW | | | | | | | |
|  7KT PAC1500 single-phase measuring devices Digital measuring device | | | | | | | | | | |
| | • For direct connection, single tariff | | | | | | | | | |
| | 230 | 80 | 2 | | 7KT1530 | | 1 | 1 unit | 1DD | 0.206 |
| | • For direct connection, double tariff | | | | | | | | | |
| 230 | 80 | 2 | | 7KT1531 | | 1 | 1 unit | 1DD | 0.207 | |
| • For direct connection, double tariff, MID | | | | | | | | | | |
| 230 | 80 | 2 | | 7KT1533 | | 1 | 1 unit | 1DD | 0.208 | |

Overview

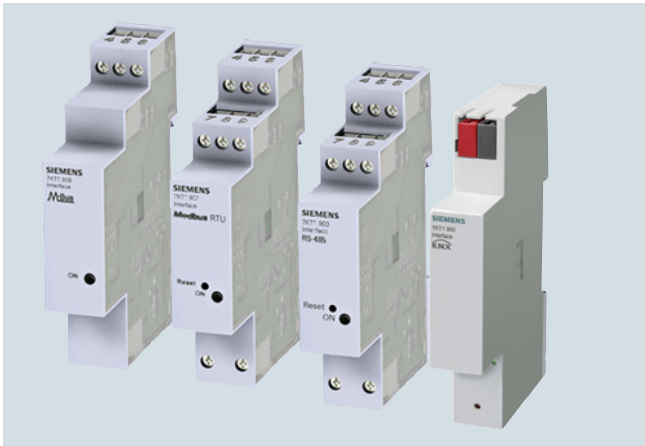

Expansion modules for 7KT PAC1500 measuring devices, from left to right: Expansion modules for M-Bus, Modbus RTU, RS 485, Instabus KNX

Expansion modules are used as communication interfaces for 7KT PAC1500 measuring devices. They have the following features:

- The expansion modules can be selected independently of the measuring device. This means they can also be retrofitted in already installed measuring devices.

- Data transmission between the measuring devices and expansion modules is executed via the IrDA infrared interface.
- The expansion modules are placed alongside the measuring devices in the installation direction so that their IrDA interfaces are exactly opposite each other.

7KT PAC M-Bus expansion module (7KT1908)

- Power supply through bus cable
- Baud rates: 300 to 9600 kbit/s
- Status indication by LED on the module
- Can be parameterized using M-Bus Master software

7KT PAC Modbus RTU expansion module (7KT1907)

- Power supply: 230 V AC
- Baud rates: 4.8 / 9.6 / 19.2 and 38.4 kbit/s are supported.
- Status indication by LED on the module
- Configurable via RS 485 master software





7KT PAC RS 485 expansion module (7KT1903)

- Power supply: 230 V AC
- Status indication by LED on the module

7KT PAC 7KNX expansion module (7KT1900)

- Power supply through the KNX/EIB bus cable
- Status indication by LED on the module

Selection and ordering data


| Version | Mounting width | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. |
|--|----------------|----|---|-----------------|----------------------------|-----------------|-----|-----------------------------|
| | MW | | | | | | | kg |
|  7KT PAC M-Bus expansion module For connecting 7KT PAC1500 measuring devices to M-Bus | 1 | | 7KT1908 | | 1 | 1 unit | 1DD | 0.055 |
|  7KT PAC Modbus RTU expansion module For connecting 7KT PAC1500 measuring devices to Modbus RTU | 1 | | 7KT1907 | | 1 | 1 unit | 1DD | 0.084 |
|  7KT PAC RS 485 expansion module For connecting 7KT PAC1500 measuring devices via RS 485 to 7KT1391 LAN couplers | 1 | | 7KT1903 | | 1 | 1 unit | 1DD | 0.085 |
|  7KT PAC KNX expansion modules For connecting 7KT PAC1500 measuring devices to Instabus KNX | 1 | | 7KT1900 | | 1 | 1 unit | 1DD | 0.063 |

Measuring Devices and Power Monitoring

7KT PAC Measuring Devices

7KT LAN couplers

Overview

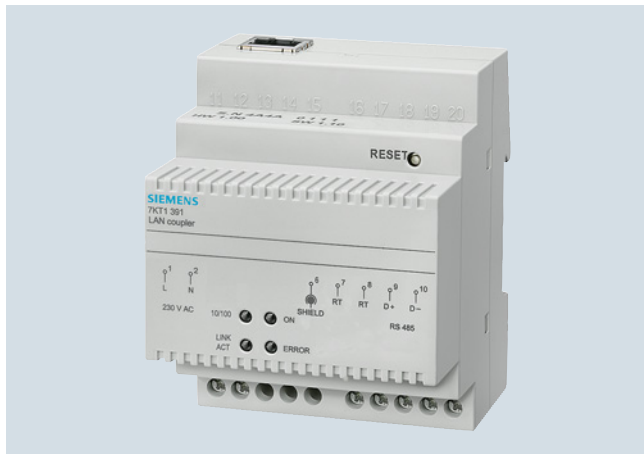

7KT LAN couplers

A LAN coupler supports worldwide data retrieval from 7KT PAC measuring devices, as long as there is a LAN link to the Internet.

Up to 30 devices can be linked to a LAN coupler via a Web browser, such as Firefox. In turn, the LAN coupler is connected to a LAN.

Data communication between the LAN coupler and the PC takes place using the TCP/IP protocol.


Application

Suitable 7KT PAC measuring devices

The following measuring devices can be connected to the LAN coupler:

| | Article No. |
|--|-------------|
| Energy measuring devices | |
| 7KT PAC1500 three-phase measuring device | |
| • For direct connection 80 A, double tariff | 7KT1543 |
| • For direct connection 80 A, double tariff, MID | 7KT1545 |
| • For transformer connection .../5 A, double tariff | 7KT1540 |
| • For transformer connection .../5 A, double tariff, MID | 7KT1542 |
| • For direct connection 125 A, double tariff | 7KT1546 |
| • For direct connection 125 A, double tariff, MID | 7KT1548 |
| 7KT PAC1500 single-phase measuring device | |
| • For direct connection 80 A, double tariff | 7KT1531 |
| • For direct connection 80 A, double tariff, MID | 7KT1533 |

Connecting several devices to a 7KT LAN coupler

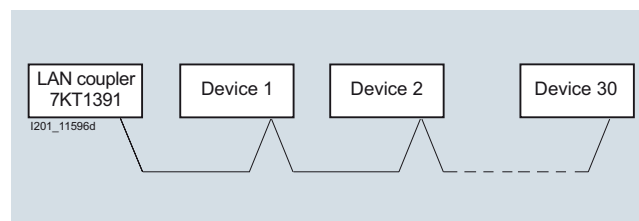

Technical specifications

| | | 7KT LAN couplers |
|--------------------------------------|-------------------|--|
| Standards | | IEEE 802.3 AS, IEC 60950, EN 61000-6-2, EN 61000-6-3 |
| General data | | |
| • Enclosure | Acc. to DIN 43880 | 4 modules |
| • Mounting | Acc. to EN 60715 | Mounting on standard mounting rail (35 mm) |
| • Mounting height | mm | 70 |
| Supply | | |
| • Rated power dissipation P_v | VA | ≤ 10 |
| • Rated control supply voltage U_c | V AC | 230 |
| • Primary operating range | $\times U_c$ | 0.9 ... 1.10 |
| • Rated frequency | Hz | 50 |
| • Frequency ranges | Hz | 45 ... 65 |
| Function | | |
| • System start | | Automatic upon switching on |
| • LAN server identification | | Over the IP address of the PC |
| • Transmission rate | Limitation by LAN | Mbit/s 100 |
| • Operating system | | Windows XP/Vista/7 |
| • Browser | | IE 7, 8; Mozilla Firefox 3.09 / 3.5.3 / 3.6; Opera 9.64 / 10 / 10.5; Safari 3.2.2 / 4.0.5; Google Chrome 3.0.195.27. |
| LAN interface | | |
| • HW interface | | Connection RJ 45 |
| • SW interface | | TCP/IP |

| 7KT LAN couplers | | | |
|---|---|-----------------|-------------------------------|
| Interface to measuring devices | | | |
| • HW interface | RS 485 terminals | Number | 3 (+/-/shielded twisted pair) |
| • Line | Version | | STP (shielded twisted pair) |
| | Minimum cross-section | mm ² | 2 × 0.2 or 2 × AWG 24 |
| | Maximum line capacitance | pF/m | < 50 |
| | Impedance | W | 100 |
| | Maximum overall cable length | m | ≤ 1200 |
| | Type of installation | | Serial |
| Measuring devices can be connected directly | | Number | 30 |
| Environmental conditions | | | |
| • Temperatures | In operation | °C | -10 ... +55 |
| | Storage and transport | °C | -25 ... +70 |
| • Relative humidity | In operation | % | ≤ 80 |
| • Vibrations | Sine amplitude at 50 Hz | mm | ± 0.25 |
| • Safety class | Acc. to IEC 60950 | | III |
| • Degree of protection | Installed device front side (terminals) | | IP20 |

Selection and ordering data

| Version | U _c | Mounting width | DT | Article No. www.siemens.com/product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/P. unit | PG | Weight per PU approx. |
|--|----------------|----------------|----|---|--------------|-------------------|-------------|-----|-----------------------|
| | V AC | MW | | | | | | | kg |
| LAN couplers | | | | | | | | | |
| For connection of up to 30 devices over RS 485 | | | | | | | | | |
| | 230 | 4 | | 7KT1391 | | 1 | 1 unit | 1DD | 0.215 |



Measuring Devices and Power Monitoring

Other Measuring Devices

Digital voltmeters and ammeters

Overview



Digital measuring devices: Left: 7KT1 voltmeter, right: 7KT1 ammeter

These devices for measuring voltages and currents can be used for monitoring incoming and outgoing currents or device currents in electric plants.

They are suitable for direct connection in a single-phase system or with measuring transducers in three-phase systems.

The measuring ranges of the ammeter are set locally at the device using a coding switch.



Benefits

- The ammeters have 14 measuring ranges from 0 A to 20 A and 0 A to 999 A, which can be set using a coding switch. This ensures universal application.

Technical specifications

| | | | 7KT1110 | 7KT1120 |
|---|----------------------------|--------------|---|-----------------------------|
| Standards | | | DIN 43751-1, -2 | |
| Rated voltage U_e | | V AC | 230 | |
| Primary operating range | $\times U_e$ | | 0.9 ... 1.15 | |
| Rated frequency | | | Hz 50/60 | |
| Rated operational power P_S | | | VA <2 | |
| 7+1-segment display | | | 3 digits | |
| Measuring range | | | | |
| • Voltage | Direct measurement | V AC | 12 ... 600 (U_n) | -- |
| • Current | Direct measurement | A AC | -- | 0.4 ... 20 (I_n) |
| | Transformer measurement | A AC | -- | 25/5, 40/5, 50/5, ...1000/5 |
| Lower display value | | | From the full-scale value % 2 | |
| Measuring resistance | | | | |
| • Current | Direct measurement 20 A | m Ω | -- | 5 |
| | Transformer measurement | m Ω | -- | 10 |
| • Voltage | Direct measurement 600 V | M Ω | 1 | -- |
| Measuring frequency | | | Hz 45 ... 65 | |
| Measuring cycle | | | /s 4 | |
| Measuring accuracy | | | At 23 °C ± 1 °C % $\pm 0.5 \pm 1$ digit | |
| Temperature influence | | | %/ $^{\circ}$ C ± 0.03 | |
| Overload capability | | | | |
| • Voltage | Continuous | V | $1.2 \times U_n$ | -- |
| | Short-time for 1 s | V | $1.3 \times U_n$ | -- |
| • Current | Continuous, direct | A | -- | $1.1 \times I_n$ |
| | Short-time for 1 s, direct | A | -- | $10 \times I_n$ |
| Terminals | | | \pm screw (Pozidriv) 1 | |
| Conductor cross-sections | | | Rigid, max. mm ² 1 \times 6/2 \times 4 Flexible, with end sleeve, min. mm ² 0.75 | |
| Degree of protection | | | IP20, with connected conductors | |
| Permissible ambient temperature | | | IP20, with connected conductors | |
| • Operation | | $^{\circ}$ C | -10 ... +55 | |
| • Storage | | $^{\circ}$ C | -40 ... +70 | |

Selection and ordering data

| Version | U_e | Mounting width | DT | Article No. www.siemens.com/ product?Article.No. | Price per PU | PU (UNIT, SET, M) | PS*/P. unit | PG | Weight per PU approx. kg |
|---|-------|----------------|----|--|--------------|-------------------|-------------|-----|-----------------------------|
|  | V AC | MW | | | | | | | |
| Digital voltmeters Measuring range 12 ... 600 V AC | 230 | 2 | | 7KT1110 | | 1 | 1 unit | 1BK | 0.214 |
|  | | | | | | | | | |
| Digital ammeters for direct and transformer connection Measuring range Direct: 0.4 ... 20 A Transformer: 0.1 ... 1000 A/5 | 230 | 2 | | 7KT1120 | | 1 | 1 unit | 1BK | 0.224 |

Measuring Devices and Power Monitoring

Other Measuring Devices

Time and pulse counters for standard rail mounting

Overview



Time counters: Left: Electromechanical, right: Electronic

Time and pulse counters are used for the reliable monitoring of production and service times, which enables the exact planning and monitoring of production sequences, maintenance cycles and warranty times.

As well as the proven electromechanical time and pulse counters for mounting in distribution boards, we also supply digital time and pulse counters.

The fields of application for both counter types are very diverse, such as the recording of operating hours of machines, systems or building management systems, as well as pulse counting for general volume flow counting, registration of starting frequencies, starting cycles or production quantities in systems and machines.





Benefits

- Time and pulse counters help to plan maintenance intervals, which safeguard and ensure high plant availability
- Versions without zero position and with electric or manual zero position for all applications
- Flexible application of the digital counters for power supplies of 12 V to 150 V DC and 24 V to 240 V AC in a single device

Technical specifications

| | | 7KT5801 | 7KT5802 | 7KT5803 | 7KT5804 | 7KT5806 | 7KT5807 | |
|--|--|---|----------|----------------|--------------------------|----------|---------|---------|
| Standards Approvals | | DIN VDE 0435-110; EN 60255-6; UL 863 UL 863, UL File No. E300537, CSA C22.2 No. 6 and 55 | | | | | | |
| Rated control supply voltage U_c | V AC V DC | -- 12 ... 24 | 24 -- | 115 | 230 | 115 | 230 | |
| Primary operating range | At 50/60 Hz | $\times U_c$ 0.9 ... 1.1 | | | | | | |
| Rated frequency | Hz | -- | 50 | | | 60 | | |
| Rated power dissipation P_V | VA | < 1 | | < 2 | | | | |
| Method of operation | Counting of | Hours | | | | | | |
| Display | Drum-type register | h 00000.00 | | | | | | |
| Terminals | \pm screw (Phillips) | 1 | | | | | | |
| Conductor cross-sections | Rigid Flexible, with end sleeve, min. | mm ² 1.5 mm ² 0.75 | | | | | | |
| Permissible ambient temperature | °C | -10 ... +70 | | | | | | |
| Degree of protection | Acc. to EN 60529 | IP20, with connected conductors | | | | | | |
| Safety class | Acc. to EN 61140/VDE 0140-1 | II | | | | | | |
| Permissible humidity | % | < 80 | | | | | | |
| | | 7KT5811 | 7KT5812 | 7KT5814 | 7KT5821 | 7KT5822 | 7KT5823 | 7KT5833 |
| Standards Approvals | | DIN VDE 0435-110; EN 60255-6; UL 863 UL 863, UL File No. E300537, CSA C22.2 No. 6 and 55 | | | | | | |
| Rated control supply voltage U_c | V AC V DC | -- 12 ... 24 | 24 -- | 230 -- | 24 ... 240 12 ... 150 | | | |
| Primary operating range | At 50/60 Hz | $\times U_c$ 0.9 ... 1.1 | | | | | | |
| Rated frequency | Hz | -- | 50/60 | | | | | |
| Rated power dissipation P_V | VA | < 1 | | < 2 | < 1 | | | |
| Method of operation | Counting of | Pulses | | | Hours | | Pulses | |
| Display | Drum-type register LCD | h | | -- 000000.0 | | -- -- | | 0000000 |
| Counting frequency | Hz | 10 | | -- | | 10 | | |
| Pulse duration | ms | 50 | | -- | | 50 | | |
| Resetting | Electrical Mechanical | -- | | -- | | Yes | | Yes |
| Terminals | \pm screw (Phillips) | 1 | | | | | | |
| Conductor cross-sections | Rigid Flexible, with end sleeve, min. | mm ² 1.5 mm ² 0.75 | | | | | | |
| Permissible ambient temperature | °C | -10 ... +70 | | | | | | |
| Degree of protection | Acc. to EN 60529 | IP20, with connected conductors | | | | | | |
| Safety class | Acc. to EN 61140/VDE 0140-1 | II | | | | | | |
| Permissible humidity | % | < 80 | | | | | | |

Selection and ordering data

| | U_c | Frequency | Mounting width | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. kg | |
|--|--|-----------|----------------|-------------------------|---|-----------------|----------------------------|------------------|------------|-----------------------------------|--|
| | V | Hz | MW | | | | | | | | |
|  | Time counters | | | | | | | | | | |
| | Mechanical counting mechanism, display 00000.00 h without resetting | | | | | | | | | | |
| | 12 ... 24 DC | -- | 2 | | 7KT5801 | | 1 | 1/60 units | 1BK | 0.094 | |
| | 24 AC | 50 | | | 7KT5802 | | 1 | 1 unit | 1BK | 0.093 | |
| | 115 AC | | | | 7KT5803 | | 1 | 1 unit | 1BK | 0.092 | |
| | 230 AC | | | | 7KT5804 | | 1 | 1 unit | 1BK | 0.093 | |
| | 115 AC 230 AC | 60 | | | 7KT5806 7KT5807 | | 1 1 | 1 unit 1 unit | 1BK 1BK | 0.091 0.093 | |
|  | Pulse counters | | | | | | | | | | |
| | Mechanical counting mechanism, display 0000000  without resetting | | | | | | | | | | |
| | 12 ... 24 DC | -- | 2 | | 7KT5811 | | 1 | 1 unit | 1BK | 0.092 | |
| | 24 AC | 50/60 | | | 7KT5812 | | 1 | 1 unit | 1BK | 0.094 | |
| | 230 AC | | | | 7KT5814 | | 1 | 1 unit | 1BK | 0.094 | |
| | Electronic time counters | | | | | | | | | | |
| | LCD 000000.0h without resetting | | | | | | | | | | |
| 12 ... 150 DC, 24 ... 240 AC | -- 50/60 | 2 | | 7KT5821 | | 1 | 1 unit | 1BK | 0.090 | | |
| With electrical resetting | | | | | | | | | | | |
| 12 ... 150 DC, 24 ... 240 AC | -- 50/60 | | | 7KT5822 | | 1 | 1 unit | 1BK | 0.087 | | |
| With electrical and mechanical resetting | | | | | | | | | | | |
| 12 ... 150 DC, 24 ... 240 AC | -- 50/60 | | | 7KT5823 | | 1 | 1 unit | 1BK | 0.087 | | |
| Electronic pulse counters | | | | | | | | | | | |
| LCD 0000000  With electrical and mechanical resetting | | | | | | | | | | | |
| 12 ... 150 DC, 24 ... 240 AC | -- 50/60 | 2 | | 7KT5833 | | 1 | 1 unit | 1BK | 0.087 | | |

More information

Time counters count the time in hours with an accuracy of two decimal places (hundredths of hours). The pulse counter adds the number of pulses, e.g. the making operations of devices.

A power supply is required at terminals 1 and 2 of the electronic counters so that the device can constantly display the measured values. Once terminal 3 is supplied with voltage (for DC "+"), the counting procedure starts. If terminal 4 is supplied short-time with voltage (for DC "+"), the counter is reset.

In the case of electronic counters, the counting result is saved indefinitely in the event of a power failure (EEPROM). On recovery of the power, the counting is continued from the saved value. As well as a modern design, the electronic counter has a 7-digit LCD, which can be reset electrically or manually.

Measuring Devices and Power Monitoring

Other Measuring Devices

Time counters for front-panel mounting

Overview



Time counters: Left: Counting mechanism, right: Counting mechanism with front frame

Time and pulse counters for control cabinets, control systems and mechanical engineering are used, e.g. in boilers, machine tools or compressors. The pulse counters count the starting frequencies. This supports planning for preventative maintenance.

In-time and regular maintenance is the best protection against unexpected shutdowns.

Benefits



- Time and pulse counters help to plan maintenance intervals, which safeguard and ensure high plant availability

Technical specifications

| | | 7KT5500 | 7KT5501 | 7KT5502 | 7KT5503 | 7KT5504 | 7KT5505 |
|--|--------------------|------------------------------|-----------|---------|---------|---------|---------|
| Standards | | DIN VDE 0435-110; EN 60255-6 | | | | | |
| Rated control supply voltage U_c | V AC V DC | -- 10 ... 80 | 115 -- | 230 | 115 | 230 | 24 |
| Rated frequency | Hz | -- | 50 | | 60 | | 50 |
| Front-panel mounting | Switchboard cutout | | | | | | |
| | mm x mm | 45.2 x 45.2 ^{+0.3} | | | | | |
| | Ø mm | 50.2 ^{+0.3} | | | | | |

| | | 7KT5600 | 7KT5601 | 7KT5602 | 7KT5603 | 7KT5604 |
|--|--------------------|---|-----------|---------|---------|---------|
| Standards | | DIN VDE 0435-110; EN 60255-6 | | | | |
| Rated control supply voltage U_c | V AC V DC | -- 10 ... 50 | 115 -- | 230 | 115 | 230 |
| Rated frequency | Hz | -- | 50 | | 60 | |
| Front-panel mounting | Switchboard cutout | | | | | |
| | mm x mm | 68 ^{+0.5} x 68 ^{+0.5} | | | | |

Selection and ordering data

| | U_c | Frequen- cy | Mount- ing width | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. kg | |
|---|--|----------------|------------------------|----|--|-------------------------|----------------------------|-----------------|--------|-----------------------------------|-------|
| | V | Hz | MW | | | | | | | | |
|  <p>Time counters Mechanical counting mechanism, display 00000.00 h, for front-panel mounting, front frame 48 x 48 mm</p> | 10 ... 80 DC | -- | | | 7KT5500 | | 1 | 1 unit | 1BK | 0.058 | |
| | 24 AC | 50 | | | 7KT5505 | | 1 | 1 unit | 1BK | 0.057 | |
| | 115 AC | | | | 7KT5501 | | 1 | 1 unit | 1BK | 0.055 | |
| | 230 AC | | | | 7KT5502 | | 1 | 1/60 units | 1BK | 0.059 | |
| | 115 AC | 60 | | | 7KT5503 | | 1 | 1 unit | 1BK | 0.057 | |
| | 230 AC | | | | 7KT5504 | | 1 | 1 unit | 1BK | 0.058 | |
| |  <p>For front-panel mounting, front frame 72 x 72 mm With narrow frame according to DIN 43700</p> | 10 ... 50 DC | -- | 2 | | 7KT5600 | | 1 | 1 unit | 1BK | 0.134 |
| | | 115 AC | 50 | | | 7KT5601 | | 1 | 1 unit | 1BK | 0.138 |
| | | 230 AC | | | | 7KT5602 | | 1 | 1 unit | 1BK | 0.131 |
| | | 115 AC | 60 | | | 7KT5603 | | 1 | 1 unit | 1BK | 0.134 |
| 230 AC | | | | | 7KT5604 | | 1 | 1 unit | 1BK | 0.134 | |
| Covers for 7KT55 time counters 55 x 55 mm | | | | | 7KT9020 | | 1 | 1 unit | 1BK | 0.004 | |
| Sealing rings for 7KT9020 covers IP43 installation in switchboards with smooth surfaces (1 set = 5 units) | | | | | 7KT9000 | | 1 | 1 set | 1BK | 0.004 | |
| Terminal covers for 7KT56 time counters Degree of protection, IP20, with connected conductors | | | | | 7KT9021 | | 1 | 1 unit | 1BK | 0.007 | |

* You can order this quantity or a multiple thereof.

Overview



4NC53 current transformers

Technical specifications

4NC current transformers for measuring purposes

| | |
|---|---|
| Standards | EN 60044-1, VDE 0414-44-1 |
| Window-type current transformers | The conductor to be measured (busbar or cable) is passed through the window opening and constitutes the primary circuit of the window-type current transformer. Pin-wound transformers: An economical solution especially for small primary currents of 5 ... 75 A are window-type current transformers when the conductor to be measured is pin-wound several times. |
| Rated primary current I_{pn} | Current transformers can be continuously loaded with 1.3 times the rated primary current (I_{pn}). |
| Rated secondary current I_{sn} | |
| 1 A | Particularly suitable for longer measuring leads. Cable losses of only 4 % in contrast to 5 A current transformers. |
| 5 A | 5 A current transformers generate 25 times the power losses on measuring leads as compared with 1 A current transformers. These stray losses result in higher power in the case of long cables. Only recommended for use with short measuring leads. |
| Accuracy class | |
| Class 1 | Operation measurement, internal metering Current error $\pm 1\%$ at $1 \times I_{pn}$ and $1.2 \times I_{pn}$ |
| Class 3 | Coarse measurement Current error $\pm 3\%$ at $0.5 \times I_{pn}$ and $1.2 \times I_{pn}$ |
| Rated power P_n | The rated power of transformers is specified in VA. The actual load rating should be similar to the rated power; a lower actual load rating (underburden) increases the overcurrent factor and measuring devices are not sufficiently protected in case of a short-circuit, a higher actual load rating (overburden) has a negative effect on the accuracy. With a frequency of 60 Hz the rated power increases to 1.2 times. With $16^{2/3}$ Hz the output power decreases to $1/3$ of the rated power. |
| Maximum voltage for equipment U_m | This is the rms value of the maximum voltage between the conductors of a system. For this voltage the insulation must be rated at normal operating conditions. 4NC5 current transformers are suitable for 720 V. |
| Overcurrent limiting factor FS | The overcurrent limiting factor is expressed using the characters FS and a factor, e.g. FS5 or FS10. When a short-circuit current flows through the primary winding of a current transformer, the stress on the measuring devices connected to the current transformer is the lower the smaller the overcurrent limiting factor is. |
| Rated short-time thermal current I_{th} | The rated short-time thermal current I_{th} is the rms value of the primary current with a duration of one second, whose heat effect the current transformer can resist without being damaged in the event of a short-circuited secondary winding. |
| Rated impulse current I_{dyn} | The rated impulse current I_{dyn} is the highest instantaneous value of the current after a short circuit whose force the current transformer can resist without being damaged. The rated impulse current is specified as peak value. |

Measuring Devices and Power Monitoring


Accessories

4NC current transformers

4NC51 window-type current transformers, used as pin-wound transformers, classes 1 and 3, from 5 A to 75 A

Pin-winding increases the primary current of the current transformer. Consequently, window-type current transformers can also be used for low primary currents.

| Basic type | | 4NC5112 | 4NC5113 | 4NC5115 | 4NC5117 | 4NC5121 | 4NC5122 | 4NC5123 | |
|--------------------------------|----|---------------------------------|---------|---------|---------|---------|---------|---------|----|
| Rated primary current | A | 50 | 60 | 75 | 100 | 150 | 200 | 250 | |
| Rating | VA | 2.5 | 2.5 | 2.5 | 2.5 | 2.5 | 5 | 5 | |
| Primary current to be measured | A | Number of required pin windings | | | | | | | |
| | | Class 3 | | | Class 1 | | | | |
| | | 5 | 10 | -- | -- | -- | -- | -- | -- |
| | | 10 | 5 | 6 | -- | 10 | -- | -- | -- |
| | | 15 | -- | 4 | 5 | -- | 10 | -- | -- |
| | | 20 | -- | 3 | -- | 5 | -- | 10 | -- |
| | | 25 | 2 | -- | 3 | 4 | 6 | 8 | 10 |
| | | 30 | -- | 2 | -- | -- | 5 | -- | -- |
| | | 40 | -- | -- | -- | -- | -- | 5 | -- |
| | | 50 | -- | -- | -- | 2 | 3 | 4 | 5 |
| 75 | -- | -- | -- | -- | 2 | -- | -- | | |



4NC51 used as pin-wound transformer

Selection and ordering data

4NC current transformers for measuring purposes

| Rated primary current I_{pn} | Rating P_n | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/P. unit | PG | Weight per PU approx. |
|---|--------------|----|--|--------------|-------------------|-------------|-----|-----------------------|
| A | VA | | | | | | | kg |
| Classes 1 and 3, from 50 to 1 500 A | | | | | | | | |
| Rated secondary current 1A | | | | | | | | |
| Class 3 | | | | | | | | |
| <ul style="list-style-type: none"> For circular conductors with max. diameter 17.5 mm For busbars up to max. 12 × 10 mm | | | | | | | | |
| 50 | 2.5 | | 4NC5112-0BC20 | | 1 | 1 unit | 1CL | 0.424 |
| 60 | 2.5 | | 4NC5113-0BC20 | | 1 | 1 unit | 1CL | 0.434 |
| 75 | 2.5 | | 4NC5115-0BC20 | | 1 | 1 unit | 1CL | 0.428 |
| Class 1 | | | | | | | | |
| <ul style="list-style-type: none"> For circular conductors with max. diameter 17.5 mm For 1 busbar up to max. 12 × 10 mm | | | | | | | | |
| 100 | 2.5 | | 4NC5117-0CC20 | | 1 | 1 unit | 1CL | 0.334 |
| 150 | 2.5 | | 4NC5121-0CC20 | | 1 | 1 unit | 1CL | 0.326 |
| 200 | 5 | | 4NC5122-0CE20 | | 1 | 1 unit | 1CL | 0.356 |
| 250 | 5 | | 4NC5123-0CE20 | | 1 | 1 unit | 1CL | 0.341 |
| <ul style="list-style-type: none"> For circular conductors with max. diameter 28 mm For 1 busbar up to max. 30 × 10 mm For 2 busbars up to max. 25 × 5 mm | | | | | | | | |
| 200 | 5 | | 4NC5222-0CE20 | | 1 | 1 unit | 1CL | 0.456 |
| 250 | 5 | | 4NC5223-0CE20 | | 1 | 1 unit | 1CL | 0.466 |
| 300 | 5 | | 4NC5224-0CE20 | | 1 | 1 unit | 1CL | 0.359 |
| 400 | 5 | | 4NC5225-0CE20 | | 1 | 1 unit | 1CL | 0.371 |
| <ul style="list-style-type: none"> For circular conductors with max. diameter 36 mm For 1 busbar up to max. 50 × 10 mm For 2 busbars up to max. 40 × 5 mm | | | | | | | | |
| 400 | 5 | | 4NC5325-0CE20 | | 1 | 1 unit | 1CL | 0.460 |
| 500 | 5 | | 4NC5326-0CE20 | | 1 | 1 unit | 1CL | 0.417 |
| 600 | 5 | | 4NC5327-0CE20 | | 1 | 1 unit | 1CL | 0.430 |
| 750 | 5 | | 4NC5328-0CE20 | | 1 | 1 unit | 1CL | 0.390 |
| <ul style="list-style-type: none"> For circular conductors with max. diameter 45 mm For 1 busbar up to max. 60 × 10 mm For 2 busbars up to max. 60 × 10 mm For 3 busbars up to max. 60 × 5 mm | | | | | | | | |
| 1000 | 10 | | 4NC5431-0CH20 | | 1 | 1 unit | 1CL | 0.647 |
| 1250 | 10 | | 4NC5433-0CH20 | | 1 | 1 unit | 1CL | 0.681 |
| 1500 | 10 | | 4NC5434-0CH20 | | 1 | 1 unit | 1CL | 0.702 |



4NC5112-0BC20



4NC5117-0CC20



4NC5222-0CE20








4NC5325-0CE20



4NC5431-0CH20

4NC51 window-type current transformers, used as pin-wound transformers, classes 1 and 3, from 5 A to 75 A

| | Rated primary current I_{pn} | Rating P_n | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/ P. unit | PG | Weight per PU approx. kg |
|---|---|--------------|----|---|-----------------|----------------------------|-----------------|-----|-----------------------------------|
| | A | VA | | | | | | | |
| Rated secondary current 5 A | | | | | | | | | |
| Class 3 | | | | | | | | | |
| | <ul style="list-style-type: none"> For circular conductors with max. diameter 17.5 mm For 1 busbar up to max. 12 × 10 mm | | | | | | | | |
|  | 50 | 2.5 | | 4NC5112-2BC20 | | 1 | 1 unit | 1CL | 0.429 |
| | 60 | 2.5 | | 4NC5113-2BC20 | | 1 | 1 unit | 1CL | 0.424 |
| 4NC5112-2BC20 | 75 | 2.5 | | 4NC5115-2BC20 | | 1 | 1 unit | 1CL | 0.424 |
| Class 1 | | | | | | | | | |
| | <ul style="list-style-type: none"> For circular conductors with max. diameter 17.5 mm For 1 busbar up to max. 12 × 10 mm | | | | | | | | |
|  | 100 | 2.5 | | 4NC5117-2CC20 | | 1 | 1 unit | 1CL | 0.336 |
| | 150 | 2.5 | | 4NC5121-2CC20 | | 1 | 1 unit | 1CL | 0.324 |
| 4NC5117-2CC20 | 200 | 5 | | 4NC5122-2CE20 | | 1 | 1 unit | 1CL | 0.349 |
| | 250 | 5 | | 4NC5123-2CE20 | | 1 | 1 unit | 1CL | 0.344 |
| | <ul style="list-style-type: none"> For circular conductors with max. diameter 28 mm For 1 busbar up to max. 30 × 10 mm For 2 busbars up to max. 25 × 5 mm | | | | | | | | |
|  | 200 | 5 | | 4NC5222-2CE20 | | 1 | 1 unit | 1CL | 0.461 |
| | 250 | 5 | | 4NC5223-2CE20 | | 1 | 1 unit | 1CL | 0.476 |
| 4NC5222-2CE20 | 300 | 5 | | 4NC5224-2CE20 | | 1 | 1 unit | 1CL | 0.359 |
| | 400 | 5 | | 4NC5225-2CE20 | | 1 | 1 unit | 1CL | 0.374 |
| | <ul style="list-style-type: none"> For circular conductors with max. diameter 36 mm For 1 busbar up to max. 50 × 10 mm For 2 busbars up to max. 40 × 5 mm | | | | | | | | |
|  | 400 | 5 | | 4NC5325-2CE20 | | 1 | 1 unit | 1CL | 0.461 |
| | 500 | 5 | | 4NC5326-2CE20 | | 1 | 1 unit | 1CL | 0.415 |
| | 600 | 5 | | 4NC5327-2CE20 | | 1 | 1 unit | 1CL | 0.435 |
| 4NC5325-2CE20 | 750 | 5 | | 4NC5328-2CE20 | | 1 | 1 unit | 1CL | 0.388 |
| | <ul style="list-style-type: none"> For circular conductors with max. diameter 45 mm For 1 busbar up to max. 60 × 10 mm For 2 busbars up to max. 60 × 10 mm For 3 busbars up to max. 60 × 5 mm | | | | | | | | |
|  | 1000 | 10 | | 4NC5431-2CH20 | | 1 | 1 unit | 1CL | 0.656 |
| | 1250 | 10 | | 4NC5433-2CH20 | | 1 | 1 unit | 1CL | 0.650 |
| 4NC5431-2CH20 | 1500 | 10 | | 4NC5434-2CH20 | | 1 | 1 unit | 1CL | 0.705 |

More information


For other current transformers for measuring purposes, see chapter "Switch Disconnectors"

Measuring Devices and Power Monitoring

Accessories

7KT12 current transformers

Overview

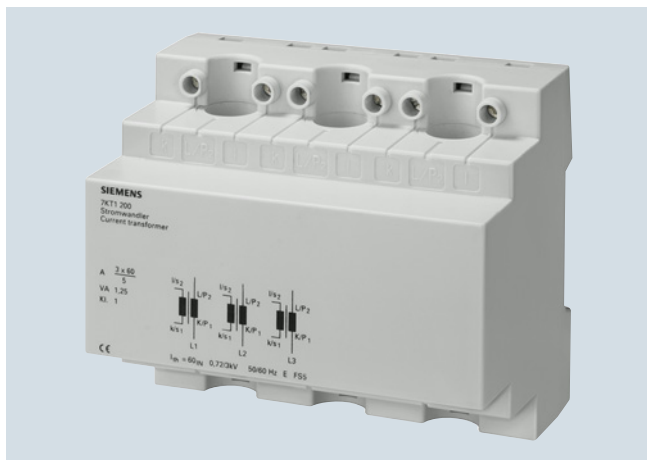

7KT12 current transformers

The three-phase 7KT12 current transformer can be used in distribution boards according to DIN 43880. The measuring leads are routed vertically through the standard mounting rail.

This type of current transformer is suitable for infeeds or outgoing lines in connection with the installation of a 5TE8 switch or a 5TE1 disconnector, as the primary connecting leads do not have to be interrupted.

The current transformer is designed for cables of up to 13 mm in diameter, e.g. H07V-R with 50 mm² conductor cross-section.

Benefits


- The current transformer has accuracy class 1 in accordance with EN 60044-1.
- The versions designed for a transformer ratio of 60/5 A, 100/5 A and 150/5 A enable an even broader range of applications.

Technical specifications

| | | 7KT1200 | 7KT1201 | 7KT1202 |
|---|--------------------|-------------------|---------|---------|
| Standards | | EN 60044-1 | | |
| Secondary rated current strength | A | 5 | | |
| Accuracy class | Cl. | 1 | | |
| Rated power | VA | 1.25 | 2.5 | 3.75 |
| Rated frequency f_n | Hz | 50/60 | | |
| Thermal current limit I_{th} | Short-time | A $60 \times I_e$ | | |
| Thermal continuous current | | A $1 \times I_e$ | | |
| Overcurrent limit factor | FS | 5 | | |
| Rated impulse withstand voltage U_{imp} | kV | > 3 | | |
| Creepage distances and clearances | mm | > 3 | | |
| Rated operational voltage U_e | V AC | 720 | | |
| Rated operational current I_e | A AC | 3 × 60 | 3 × 100 | 3 × 150 |
| Terminals ±screw (Pozi driv) | | PZ 1 | | |
| Conductor cross-sections | | | | |
| - Rigid | mm ² | 0.5 ... 4 | | |
| - Flexible, with end sleeve | mm ² | 0.5 ... 2.5 | | |
| Permissible ambient temperature | °C | -5 ... +60 | | |
| Resistance to climate | Acc. to EN 60068-1 | 20/60/4 | | |

Selection and ordering data

| | U_e | I_e | I_{sec} | Mounting width | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/P. unit | PG | Weight per PU approx. kg |
|-----------------------------|-------|------------------------------|-----------|----------------|----|--|--------------|-------------------|-------------|-----|--------------------------|
| | V AC | A AC | A AC | MW | | | | | | | |
| Current transformers | 720 | 3 × 60 3 × 100 3 × 150 | 5 | 6 | | 7KT1200 7KT1201 7KT1202 | | 1 | 1 unit | 1BK | 0.535 |
| | | | | | | | | 1 | 1 unit | 1BK | 0.543 |
| | | | | | | | | 1 | 1 unit | 1BK | 0.558 |



Overview



Measuring selector switch (voltmeter selector switch)



Measuring selector switches are used as CO contacts of the phases for voltages and currents in three-phase systems for voltmeters and ammeters.

The design of these switches is adapted to match the modular installation devices. They support use in compliance with EN 60947-3.

Benefits

The devices have a rated insulation voltage of 660 V. This permits use in many systems.

Selection and ordering data

| | U_e | I_e | U_c | Mounting width | DT | Article No. www.siemens.com/ product?Article No. | Price per PU | PU (UNIT, SET, M) | PS*/P. unit | PG | Weight per PU approx. kg |
|--|-------|-------|-------|----------------|----|--|--------------|-------------------|-------------|-----|--------------------------|
| | V AC | A AC | V AC | MW | | | | | | | |
|  <p>Voltmeter selector switches</p> | 400 | 12 | 6 | 3 | | 7KT9010 | | 1 | 1/48 units | 1BK | 0.137 |
|  <p>Ammeter selector switches for operation with current transformer</p> | 400 | 12 | 6 | 3 | | 7KT9011 | | 1 | 1 unit | 1BK | 0.137 |

Measuring Devices and Power Monitoring

Accessories

Notes

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Counters & Tachometers](#) category:

Click to view products by [Siemens](#) manufacturer:

Other Similar products are found below :

[LC2H-FE-2K-N](#) [H7CN-XLN DC12-48](#) [LC24-F-N](#) [H7CXAWD1NDC1224AC24](#) [H7ER-NV1-H](#) [H7CX-A114S-N AC100-240](#) [H7CX-AWSD-N-DC12-24](#) [H7CX-AU-N AC100-240](#) [GPMZC-SET](#) [CX6S-1P2F](#) [CX6S-1P4F](#) [CX6S-2P2F](#) [CX6S-2P4F](#) [H127.010A01H](#) [H5KLR-11 100-240V AC/DC](#) [H7CX-AUD1-N](#) [H7CX-AW-N](#) [3.550.401.075](#) [3.550.401.351](#) [LC2H-C-2K-N](#) [LC2H-C-30-N](#) [LC2H-F-DL-2KK](#) [LC4H-R4-AC240VS](#) [LC4H-R6-AC240V](#) [1.150.510.012.550](#) [1.150.510.054.550](#) [1.150.510.056.550](#) [6.520.012.300](#) [6.560.010.300](#) [SLE-73-1400-1-4-01](#) [SLIK-94-1521-1-3-001](#) [SLN-94-1421-1-3](#) [SPI-73-1411-1-3-011](#) [CT6S-1P4](#) [Y-50](#) [LC4H-R4-AC24V](#) [LC4H-R4-DC24V](#) [CT6S-2P4](#) [LC2H-F-DL-2KK-B](#) [LC2H-FE-DL-2KK-B](#) [LC2H-FE-FV-30](#) [H127.010A01G](#) [H5KLR-8B 12-48 AC/DC](#) [H7CX-A11-N](#) [H7CX-AD-N](#) [H7CX-AU-N](#) [H7ER-NV1](#) [H8DA 12-48V AC/DC](#) [87622062](#) [99776901](#)