


20A, 100V SCHOTTKY RECTIFIER

GENERAL DESCRIPTION

SBD20C100T/F/K is schottky rectifier fabricated in silicon epitaxial planar technology. Typical applications are in switching power supplies and protection circuit etc.

FEATURES

- * Guard ring for Stress Protection
- * High Surge Capacity
- * Low power loss , high efficiency
- * Low forward voltage drop

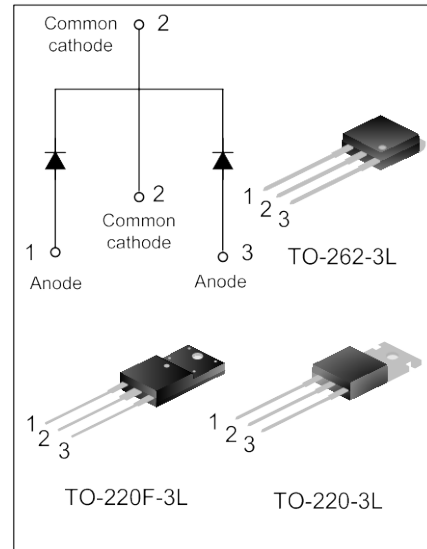

ORDERING INFORMATION

Part No.	Package	Marking	Material	Packing
SBD20C100T	TO-220-3L	SBD20C100T	Pb free	Tube
SBD20C100F	TO-220F-3L	SBD20C100F	Pb free	Tube
SBD20C100K	TO-262-3L	SBD20C100K	Pb free	Tube

ABSOLUTE MAXIMUM RATINGS (T_C=25°C unless otherwise noted)

Characteristics	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	100	V
Average Forward Rectified Current	I _{FAV}	20	A
Peak Forward Surge Current@8.3ms	I _{FSM}	150	A
Operation Junction Temperature	T _J	150	°C
Storage Temperature Range	T _{STG}	-40~150	°C

THERMAL CHARACTERISTICS

Characteristics	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	R _{θJC}	2.0	°C/W

ELECTRICAL CHARACTERISTICS

Characteristics	Symbol	Test conditions	Min.	Max.	Unit
Forward Voltage	V _F	I _F =10A (T _C =25°C)	--	0.85	V
		I _F =10A(T _C =125°C)	--	0.75	V
Reverse Current	I _R	V _R =100V(T _C =25°C)	--	50	μA
		V _R =100V(T _C =125°C)	--	25	mA

TYPICAL CHARACTERISTICS

Figure 1. Typical forward voltage

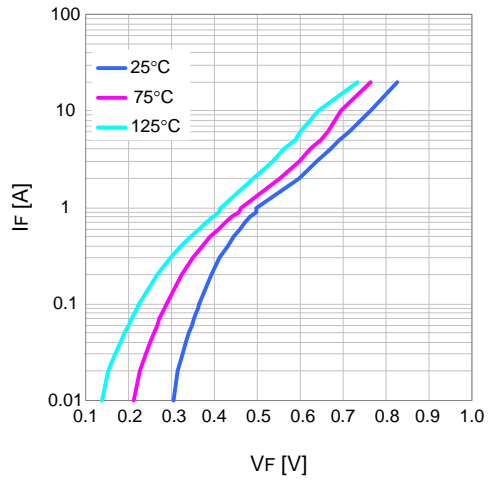


Figure 2. Typical reverse current

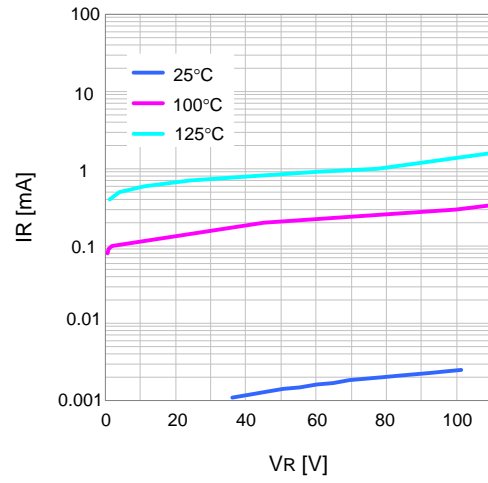


Figure 3. Typical capacitance


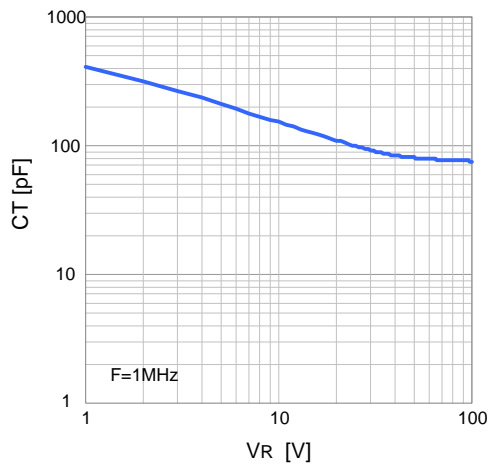



Figure 4. Average forward rectified current

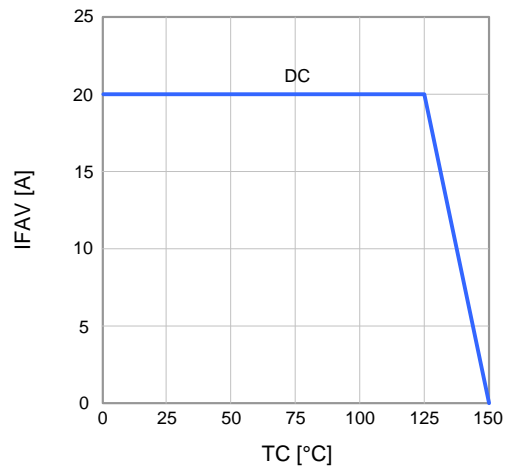

PACKAGE OUTLINE


TO-220-3L

UNIT: mm

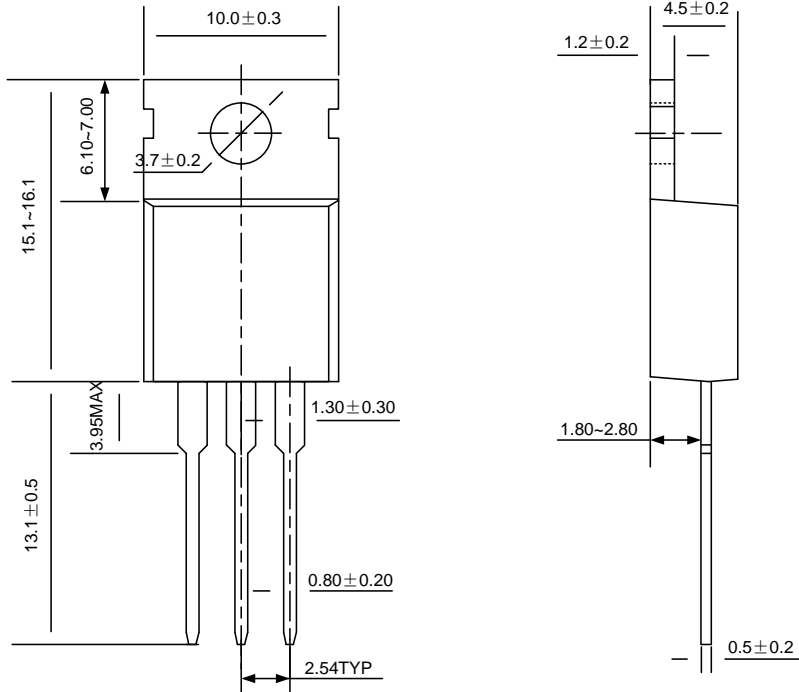


TO-220F-3L

UNIT: mm

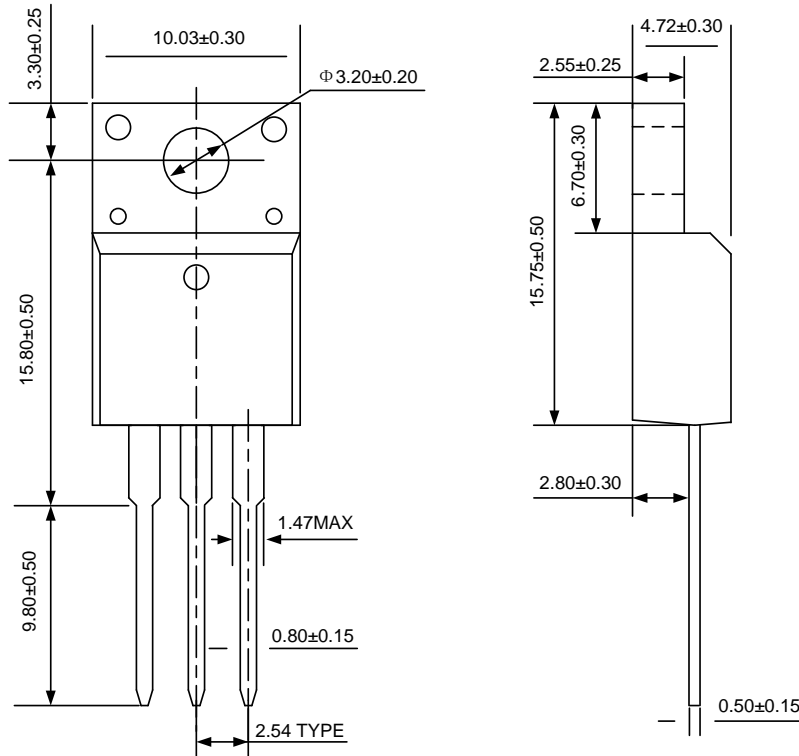

PACKAGE OUTLINE (continued)

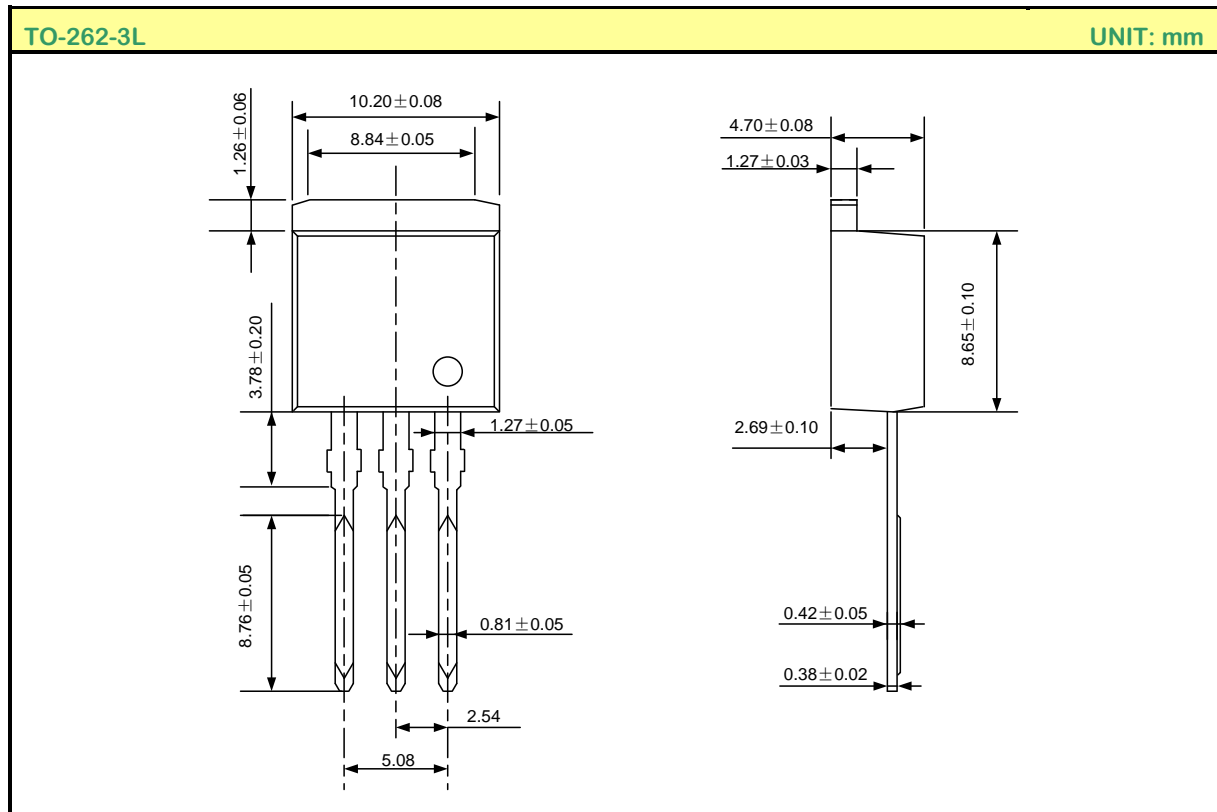

Disclaimer:

- Silan reserves the right to make changes to the information herein for the improvement of the design and performance without further notice! Customers should obtain the latest relevant information before placing orders and should verify that such information is complete and current.
- All semiconductor products malfunction or fail with some probability under special conditions. When using Silan products in system design or complete machine manufacturing, it is the responsibility of the buyer to comply with the safety standards strictly and take essential measures to avoid situations in which a malfunction or failure of such Silan products could cause loss of body injury or damage to property.
- Silan will supply the best possible product for customers!



ATTACHMENT

Revision History

Date	REV	Description	Page
2010.06.09	1.0	Original	
2010.08.25	1.1	Add TO-220-3L, TO-220F-3L package of youyi; Add TO-220-3L package of kangbi	
2010.10.09	1.2	Add TO-220F-3L package of kangbi	
2010.10.22	1.3	Modify the template of datasheet	
2011.09.01	1.4	Modify "PACKAGE OUTLINE"	
2012.05.22	1.5	Add the curve of "Average Forward Rectified Current "	
2012.09.28	1.6	Modify figure 4	
2012.10.26	1.7	Add the package of TO-262-3L	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Silan](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MA4E2508M-1112](#) [MBR10100CT-BP](#) [MBR1545CT](#) [MMBD301M3T5G](#) [GS1JE-TP](#) [RB160M-50TR](#) [BAS 3010S-02LRH E6327](#)
[BAT 54-02LRH E6327](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [NTE555](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#)
[SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SK310-T](#) [SK33A-TP](#) [SK34B-TP](#) [SS3003CH-TL-E](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#)
[MA4E2501L-1290](#) [MBRB30H30CT-1G](#) [BAS 70-02L E6327](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK32A-](#)
[TP](#) [SK33B-TP](#) [SK35A-TP](#) [SK38B-LTP](#) [SK38B-TP](#) [NTE505](#) [NTSB30U100CT-1G](#) [VS-6CWQ10FNHM3](#) [CRG04\(T5L,TEMQ\)](#)
[ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA140-HF](#) [ACDBA2100-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#) [BAT54-](#)
[13-F](#) [ACDBA340-HF](#) [ACDBA260LR-HF](#)