


## MMBT3906 TRANSISTOR(PNP)

Rev.3.0

### SOT-23

### SOT-23 贴片塑封三极管

### SOT-23 Plastic-Encapsulate Transistors



**Marking: 2A**

#### 特征 Features

- 与 MMBT3904 配对; Complementary to MMBT3904
- 最大功率耗散 200mW; Power Dissipation of 200mW
- 高稳定性和可靠性。High Stability and High Reliability

#### 机械数据 Mechanical Data

- 封装: SOT-23 封装 SOT-23 Small Outline Plastic Package
- 环氧树脂 UL 易燃等级 Epoxy UL: 94V-0
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性(TA = 25°C 除非另有规定)

#### Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

参数 Parameters	符号 Symbol	数值 Value	单位 Unit
Collector-Base Voltage	V <sub>CBO</sub>	-40	V
Collector-Emitter Voltage	V <sub>CEO</sub>	-40	V
Emitter -Base Voltage	V <sub>EBO</sub>	-5	V
Collector Current-Continuous	I <sub>C</sub>	-200	mA
Collector Power Dissipation	P <sub>C</sub>	200	mW
Junction Temperature	T <sub>j</sub>	150	°C
Storage Temperature	T <sub>stg</sub>	-55-+150	°C
Thermal resistance From junction to ambient	R <sub>θJA</sub>	625	°C/W

电特性 (TA = 25°C 除非另有规定)







#### Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)



参数 Parameter	符号 Symbols	测试条件 Test Condition	界限 Limits		单位 Unit
			Min	Max	
Collector-base breakdown voltage	V(BR)CBO	I <sub>C</sub> =-10uA, I <sub>E</sub> =0	-40		V
Collector-emitter breakdown voltage	V(BR)CEO	I <sub>C</sub> =-1mA, I <sub>B</sub> =0	-40		V
Emitter-base breakdown voltage	V(BR)EBO	I <sub>E</sub> =-10uA, I <sub>C</sub> =0	-5		V
Collector cut-off current	I <sub>CEX</sub>	V <sub>CE</sub> =-30V, V <sub>EB(off)</sub> =-3V		-100	nA
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> =-40V, I <sub>E</sub> =0		-50	nA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> =-5V, I <sub>C</sub> =0		-100	nA
DC current gain	hFE(1)	V <sub>CE</sub> =-1V, I <sub>C</sub> =-10mA	100	300	
	hFE(2)	V <sub>CE</sub> =-1V, I <sub>C</sub> =-50mA	60		
	hFE(3)	V <sub>CE</sub> =-1V, I <sub>C</sub> =-100mA	30		
Collector-emitter saturation voltage	V <sub>CE(sat)</sub> 1	I <sub>C</sub> =-50mA, I <sub>B</sub> =-5mA		-0.30	V
Base -emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>C</sub> =-50mA, I <sub>B</sub> =-5mA		-0.95	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> =-20V, I <sub>C</sub> =-10mA, f=100MHz	300		MHz
Delay time	t <sub>d</sub>	V <sub>CC</sub> =-3V, V <sub>BE(off)</sub> =-0.5V, I <sub>C</sub> =-10mA, I <sub>B1</sub> =-1mA		35	nS
Rise time	t <sub>r</sub>	V <sub>CC</sub> =-3V, V <sub>BE(off)</sub> =-0.5V, I <sub>C</sub> =-10mA, I <sub>B1</sub> =-1mA		35	nS
Storage time	t <sub>s</sub>	V <sub>CC</sub> =-3V, I <sub>C</sub> =-10mA, I <sub>B1</sub> =I <sub>B2</sub> =-1mA		225	nS
Fall time	t <sub>f</sub>	V <sub>CC</sub> =-3V, I <sub>C</sub> =-10mA, I <sub>B1</sub> =I <sub>B2</sub> =-1mA		75	nS

#### CLASSIFICATION OF hFE(1)


HFE	100-300	
RANK	L	H
RANGE	100-200	200-300

Typical characteristics

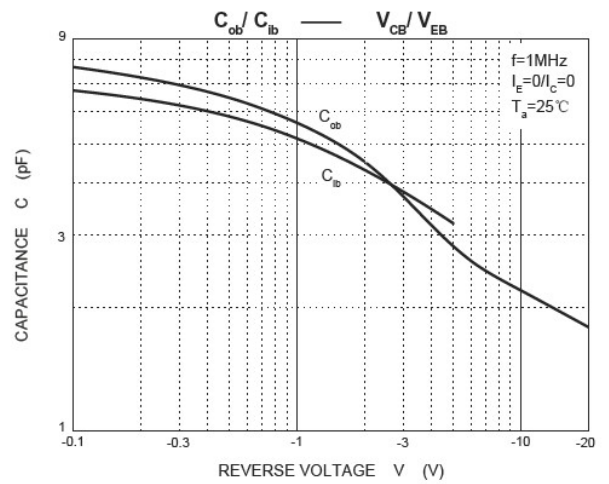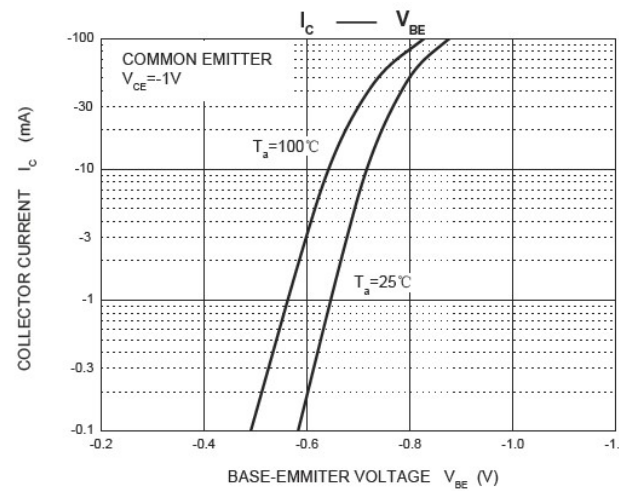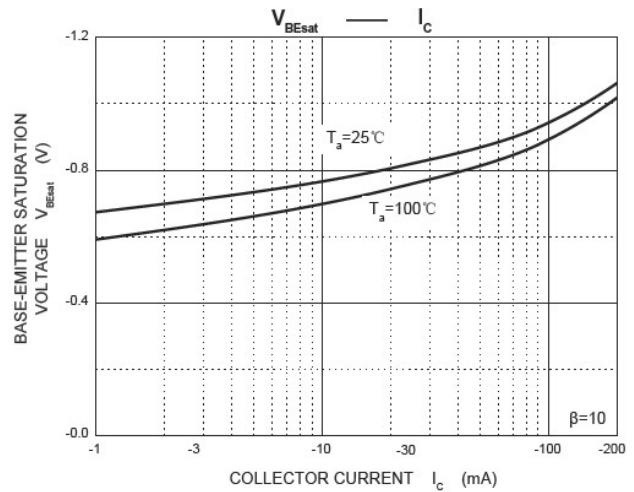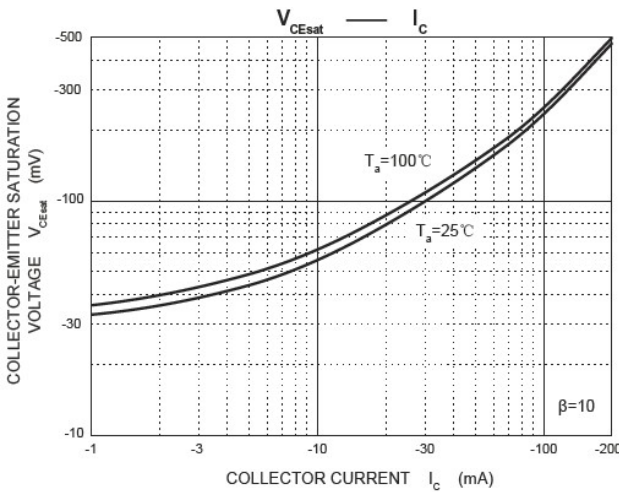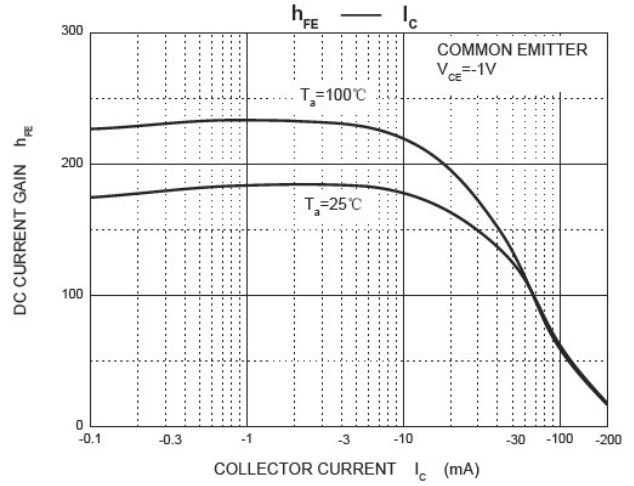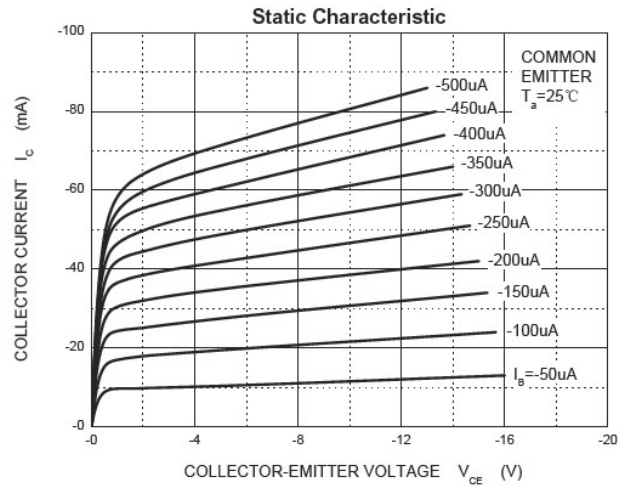

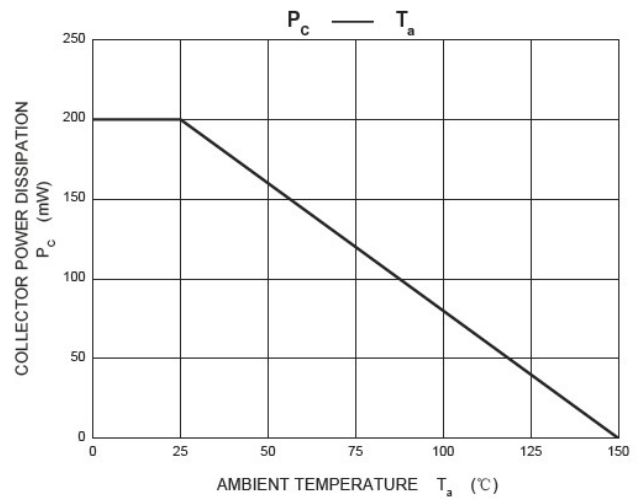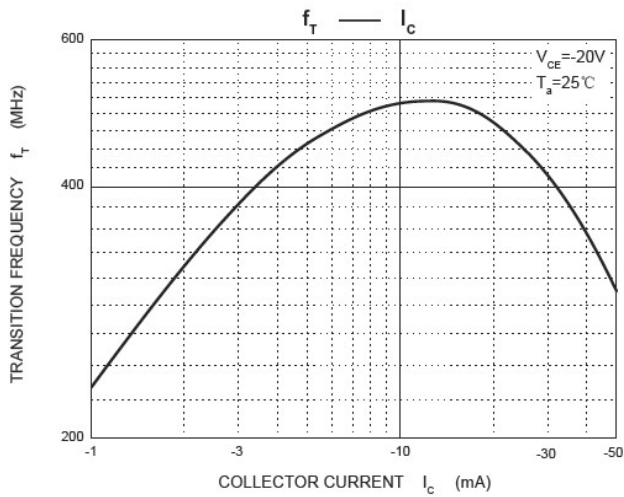

## SOT-23 PACKAGE OUTLINE Plastic surface mounted package

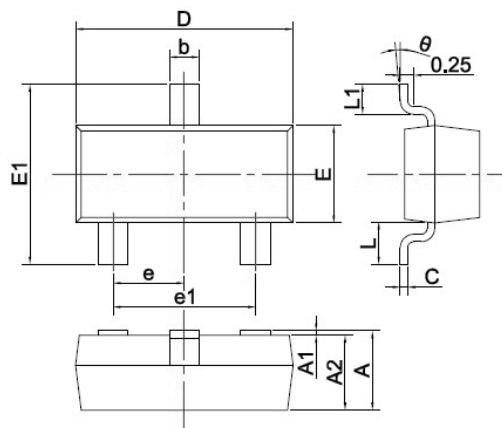


SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	0.900	1.150
A1	0.000	0.100
A2	0.900	1.050
b	0.300	0.500
c	0.080	0.150
D	2.800	3.000
E	1.200	1.400
E1	2.250	2.550
e	0.950TYP	
e1	1.800	2.000
L	0.550REF	
L1	0.300	0.500
θ	0°	8°

Unit: mm

### 焊盘设计参考 Precautions: PCB Design

Recommended land dimensions for SOT-23 diode. Electrode patterns for PCBs



- Note:
1. Controlling dimension; in millimeters.
  2. General tolerance: ±0.05mm.
  3. The pad layout is for reference purposes only.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [SINEDEVICE manufacturer](#):*

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)