

SESMF05AC
5-Line Transient Voltage Suppressor Array

Revision:B

General Description

The SESMF05AC is a transient voltage suppressor designed to protect components which are connected to data and transmission lines against ESD. It clamps the voltage just above the logic level supply for positive transients and to a diode drop below ground for negative transients.

Applications

- Computer Notebooks
- Communication Systems & Cellular Phones
- Printers
- Personal Digital Assistant (PDA)
- Video Equipment

Features

- 25 Watts Peak Pulse Power per Line ($t_p=8/20\mu s$)
- Monolithic Structure
- Clamping Voltage :5V
- Low Clamping Voltage
- Low Leakage Current
- Protects Four (4) Bidirectional Lines and Five (5) Unidirectional Lines
- RoHS compliant on Lead-Free Versions

Complies with the following standards

IEC61000-4-2


Level 4 15 kV (air discharge)

8 kV(contact discharge)


MIL STD 883E - Method 3015-7 Class 3

25 kV HBM (Human Body Model)

Functional Diagram




SOT-563

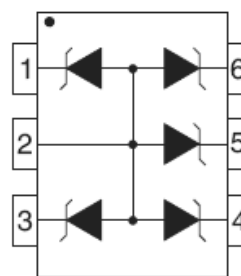

| Absolute Ratings @ 25°C Unless Otherwise Specified | | | |
|---|---|-----------------|-------|
| Symbol | Parameter | Value | Units |
| P _{PP} | Peak Pulse Power ($t_p=8/20\mu s$) See Figure 1 | 25 | Watts |
| T _J | Operating Temperature | -55°C to 150 °C | °C |
| T _{STG} | Storage Temperature | -55°C to 150°C | °C |

Electrical Parameter

| Symbol | Parameter |
|-----------|---|
| I_{PP} | Maximum Reverse Peak Pulse Current |
| V_C | Clamping Voltage @ I_{PP} |
| V_{RWM} | Working Peak Reverse Voltage |
| I_R | Maximum Reverse Leakage Current @ V_{RWM} |
| I_T | Test Current |
| V_{BR} | Breakdown Voltage @ I_T |
| I_F | Forward Current |
| V_F | Forward Voltage @ I_F |

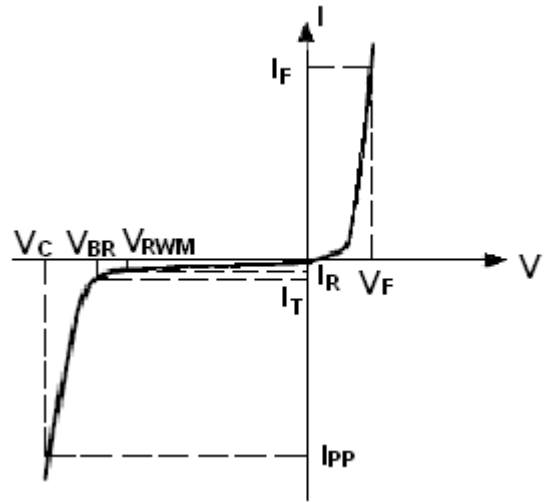

Electrical Characteristics

| Part Numbers | V_{BR} | | | I_T | V_{RWM} | I_R | C |
|--------------|----------|------|------|-------|-----------|-------|--------------|
| | Min. | Typ. | Max. | | | | Typ. 0v bias |
| | V | V | V | | | | pF |
| SESMF05AC | 6.1 | 6.7 | 7.2 | 1 | 5.0 | 1 | 20 |
| SESMF12AC | 13.3 | 14.5 | 15.0 | 1 | 12 | 1 | 16 |

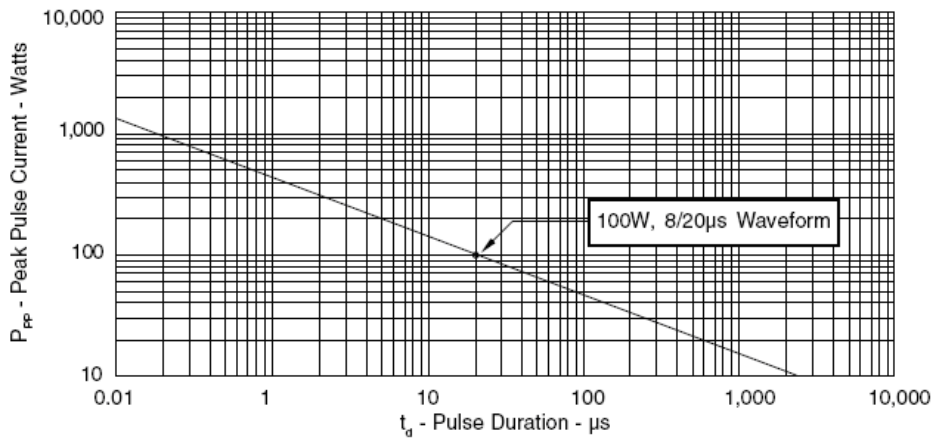


Figure 1 Peak Pulse Power VS Pulse Time

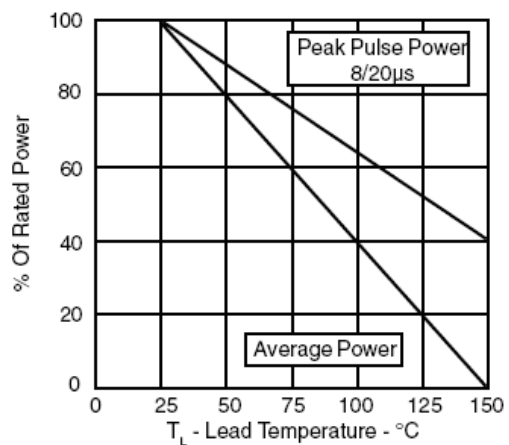
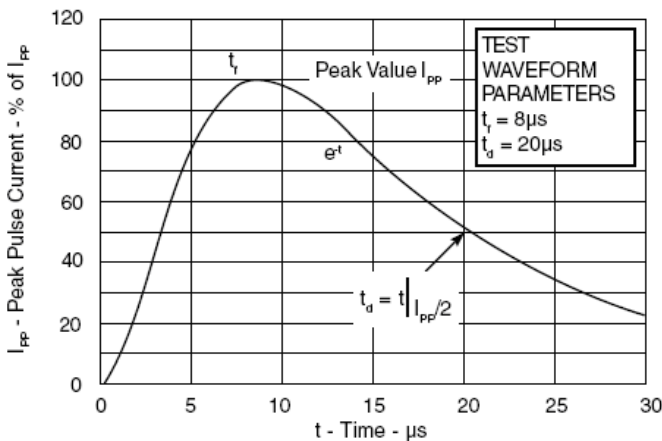


Figure 2 Pulse Wave Form

Figure 3 Power Derating Curve


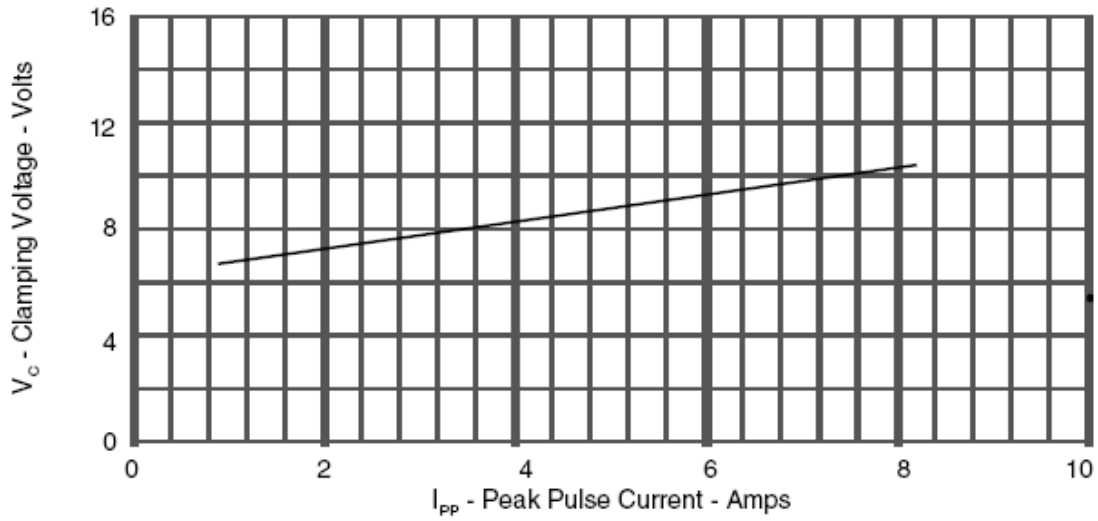


Figure 4 Typical Clamping Voltage VS Peak Pulse Current SESMF05AC

SOT-563 Mechanical Data

PACKAGE OUTLINE

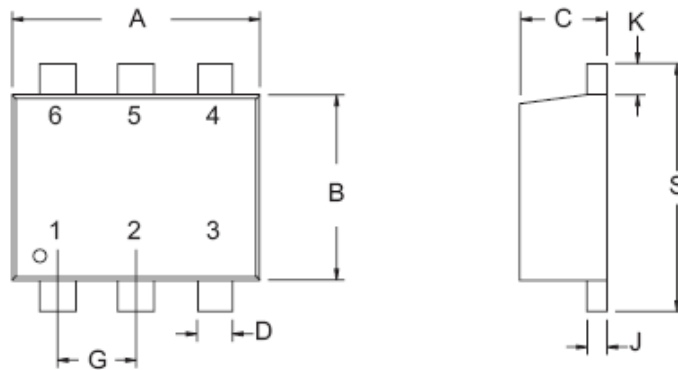


PACKAGE DIMENSIONS

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|-----------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.50 | 1.70 | 0.059 | 0.067 |
| B | 1.10 | 1.30 | 0.043 | 0.051 |
| C | 0.50 | 0.60 | 0.020 | 0.024 |
| D | 0.17 | 0.27 | 0.007 | 0.011 |
| G | 0.50 BSC | - | 0.020 BSC | - |
| J | 0.08 | 0.16 | 0.003 | 0.007 |
| K | 0.10 | 0.30 | 0.004 | 0.012 |
| S | 1.50 | 1.70 | 0.059 | 0.067 |

Mounting Pad

| Typical | | |
|---------|-------------|--------|
| DIM | MILLIMETERS | INCHES |
| 1 | 0.30 | 0.012 |
| 2 | 1.02 | 0.040 |
| 3 | 0.51 | 0.020 |
| 4 | 1.40 | 0.055 |
| 5 | 0.51 | 0.020 |



The SINO-IC logo is a registered trademark of ShangHai Sino-IC Microelectronics Co., Ltd.

© 2005 SINO-IC – Printed in China – All rights reserved.

SHANGHAI SINO-IC MICROELECTRONICS CO., LTD

Add: Building 3, Room 3401-03, No.200 Zhangheng Road, ZhangJiang Hi-Tech Park, Pudong, Shanghai 201203, China

Phone: +86-21-33932402 33932403 33932405 33933508 33933608

Fax: +86-21-33932401

Email: webmaster@sino-ic.com

Website: <http://www.sino-ic.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [sino-ic manufacturer](#):

Other Similar products are found below :

[SE100150GA](#) [SE6003C](#) [SE60120GTS](#) [SE6050B](#) [SE6016B](#) [SE80250GA](#) [SE20040A](#) [SE120120G](#) [SE60300GT](#) [SE80160G](#) [SE6020DB](#)
[SE47NS65TS](#) [SR2100](#) [SE8090A](#) [SE12N65F](#) [SE1991G](#) [SE3060D](#) [SE80160GA](#) [SE1991GA](#) [SE60120B](#) [SE80130GA](#) [SE18NS65A](#)
[SE10060A](#) [SE6880](#) [SE40160A](#) [SED10070GG](#) [SE12060GA](#) [SE60210GA](#) [SMBJ16A](#) [SE4435](#) [SE150180G](#) [SE150180GTS](#) [LT3021](#)
[SE8090G](#) [SE10030A](#) [MM3Z5V6](#) [MM1Z6V2](#) [SE6020B](#) [SE3060K](#) [SE40120A](#) [SE80130G](#) [SE8810\(ESD\)](#) [SE8205A](#) [SED14N65G](#) [SE4610](#)
[SEBLC08C](#) [SED4060GM](#) [SE10060B](#) [SEBLC15C](#) [SE30P12D](#)