



Alpha 41

GSM/UMTS/LTE/WiFi and Bluetooth Antenna

Key Features

- Overall Frequency Coverage 700-960 and 1700-2700MHz
- Ideal for Wireless LAN and Bluetooth
- Slim unobtrusive design



General Description

The Alpha 41 is a flexible over moulded antenna designed for vertical polarisation but having similar properties in the horizontal plane. The antenna comes fitted with a quality 3M adhesive pad for simple installation.

The wide bandwidth of the antenna makes it ideal for multiple uses across both telephony and WiFi.

Additional Considerations

- Does not rely on mounting on metallic surface
- WiFi, Bluetooth and ZigBee compatible
- Meets all EU compliance criteria for electronic goods





Alpha 41


GSM/UMTS/LTE/WiFi and Bluetooth Antenna

Electrical Specifications

Impedance:	50 Ohm
Gain:	700 - 960MHz 0dBi 1700 - 2700MHz 2dBi
VSWR:	≤3.6 : 1
Frequency:	700 - 960 / 1700 - 2700MHz
Max Power:	50W
Polarization:	Vertical

Mechanical Specifications

Dimensions:	132 x 22.5 x 7mm
Cable:	RG174
Connector:	SMA Plug
Mounting Method:	Double sided tape

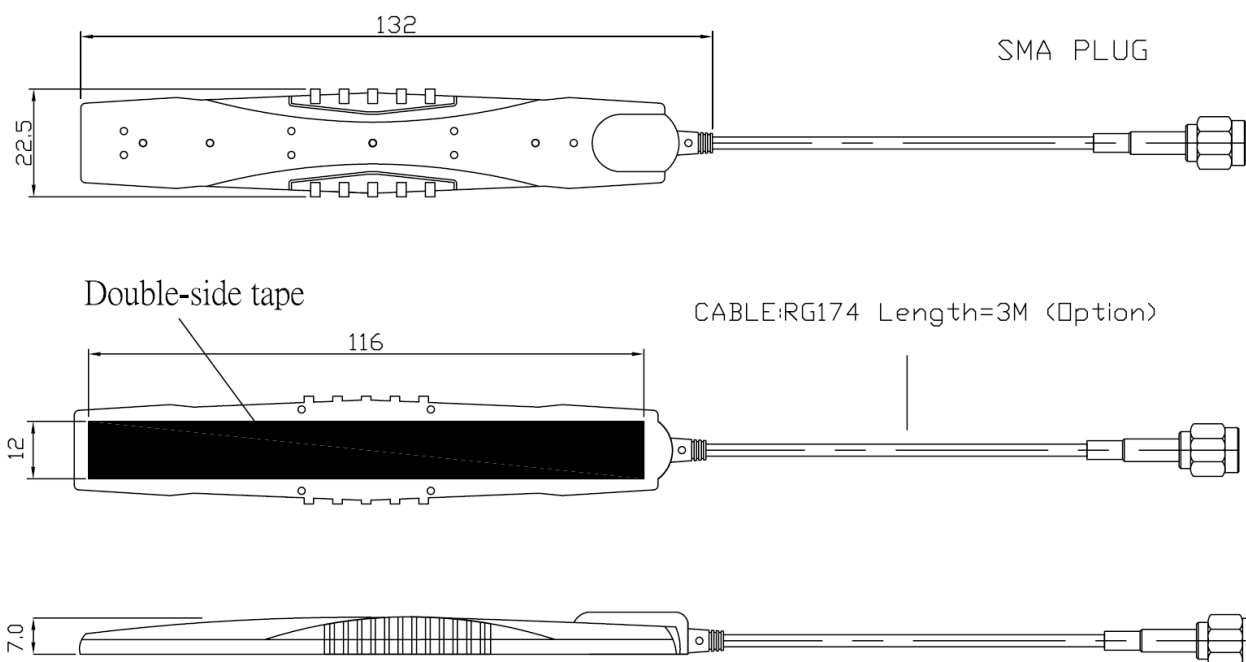





Alpha 41

GSM/UMTS/LTE/WiFi and Bluetooth Antenna

Return Loss

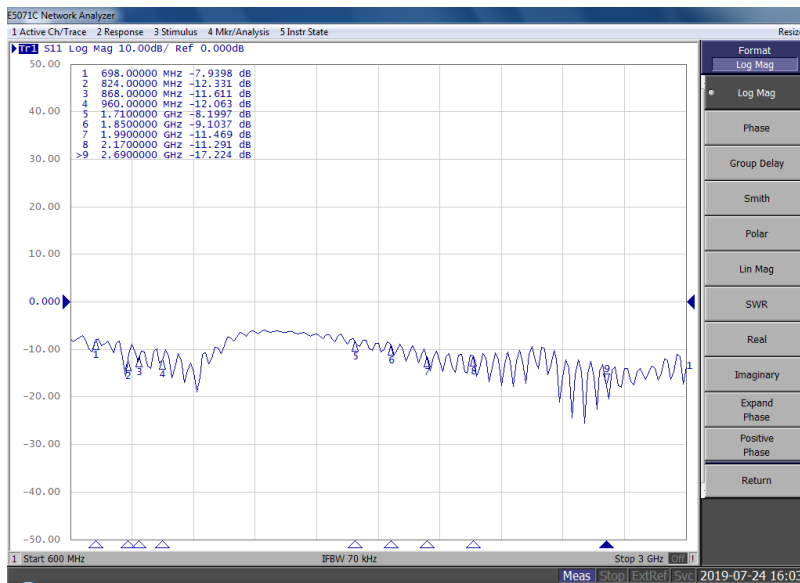

VSWR

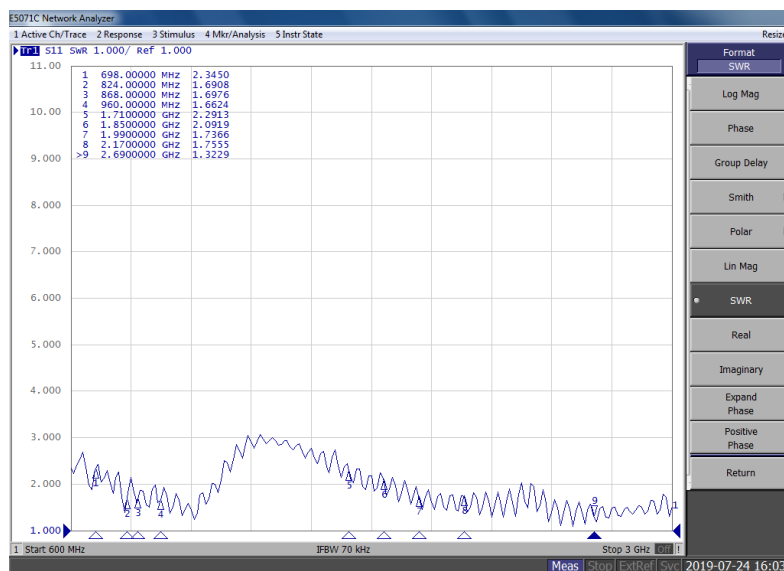

Ordering Details

Part Number	Description
ALPHA41/2M/SMAM/RP/S/19	GSM/UMTS/LTE/WiFi and Bluetooth Antenna, 2m Cable SMA Male Reverse Polarity
ALPHA41/3M/SMAM/S/S/19	GSM/UMTS/LTE/WiFi and Bluetooth Antenna, 3m Cable SMA Male

Registered in England No. 08405712
VAT Registration No. GB163 04 0349

Siretta Ltd
Basingstoke Road
Spencers Wood
Reading
Berkshire RG7 1PW

sales +44(0)118 976 9014
fax +44(0)118 976 9020
email sales@siretta.com
web www.siretta.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [SIRETTA](#) manufacturer:

Other Similar products are found below :

[930-033-R](#) [EXE902SM](#) [APAMPG-117](#) [MAF94383](#) [108-00014-50](#) [SPDA17RP918](#) [A09-F5NF-M](#) [RGFRA1903041A1T](#) [108-00016-050](#)
[W3921B0100](#) [SIMNA-868](#) [SIMNA-915](#) [SIMNA-433](#) [W1049B090](#) [TRABT1560](#) [W3118A](#) [WTL2449CQ1-FRSMM](#) [CPL9C](#) [0600-00060](#)
[GD5W-28P-NF](#) [PAL90209H-FNF](#) [MA9-7N](#) [GD53-25](#) [C37](#) [MAF94051](#) [S9025PLSMF](#) [EXD420PL](#) [B1322NR](#) [MAF94300](#) [GPSMB301](#)
[FG4403](#) [MIKROE-2393](#) [DA5-32RADOME](#) [BB1442NR](#) [5200227](#) [GPSCPMM00](#) [ANTDOM-05-01-WPM](#) [ANT-WP868SMA-Y](#)
[EXW30BNX](#) [OSCAR1A/5M/SMAM/S/S/31](#) [ALPHA4A/1M/SMAM/S/S/26](#) [OSCAR1A/10M/SMAM/S/S/31](#) [OSCAR1A/20M/SMAM/S/S/31](#)
[OSCAR40/5M/LL/SMAM/S/S/33](#) [TANGO41/1M/SMAM/S/S/32](#) [ANTX100ETBAB24553](#) [S4908WBFNM](#) [FXR.01.07.0100C.A](#) [GD57-21](#)
[001-0016](#)