




Heyco® Wire Protector Terminal Blocks


Screw to Screw—With Wire Protector Flap

- **Wire protector flap** allows the use of STRANDED or SOLID wire with no crimp terminals and no soldering required.
- Allows standardization of the SOLID WIRE Cordset. Input and output wires are always secured with a screw.
- Modern low profile design occupies less real estate.
- No exposed metal parts. “Dead front” designed safety.
- Pressure clamp connectors are supplied in the open position, ready to accept single or multiple solid conductors.
- All sizes are rated at 300 volts (450 volts in Europe).
- Metal parts feature galvanized steel screws and Ni or tin plated brass inserts.
- Available in 94V-0 flame retardant (FR), glass-filled 6/6 Nylon material.
- **Part No. 9299** fixing pin (below) can be used to mount all terminal blocks, with panel thickness limitations—consult Heyco.
- DFARS Compliant




BODY STYLE	WIRE SIZE AWG	mm ²	AMPS North America	POLES	PART NO.		DESCRIPTION	Screws (Metric)	PART DIMENSIONS											
					Natural	FR White			A (12) Poles		B		C		D		E		F	
									in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
300 Volts Rated (450 Volts in Europe)																				
Low Profile	12-22	2,5	20	2	9389	9419	TB 0B-WP-2P	M 2,6	3,69	93,6	.64	16,2	.61	15,4	.11	2,8	.32	8,0	.11	2,8
					9393	N/A	TB 0B-WP-12P													
Raised Base	10-20	4	30	2	9394	N/A	TB 1B-WP-2P	M 3,0	4,58	116,4	.73	18,6	.67	17,0	.14	3,6	.39	10,0	.14	3,6
				3	9395	N/A	TB 1B-WP-3P													
				4	N/A	9426	TB 1B-WP-4P													
				12	9398	9428	TB 1B-WP-12P													
Raised Base	8-14	6	50	2	9399	N/A	TB 2B-WP-2P	M 3,5	5,26	133,5	.87	22,2	.82	20,8	.17	4,2	.45	11,5	.15	3,7
				3	9400	N/A	TB 2B-WP-3P													
				12	9403	9433	TB 2B-WP-12P													
Raised Base	6-10	16	55	12	9408	9438	TB 3B-WP-12P	M 4,0	6,89	175,0	.99	25,2	1,04	26,3	.23	5,8	.59	15,0	.20	5,1

Standard color natural. Flame retardant white available at extra charge.

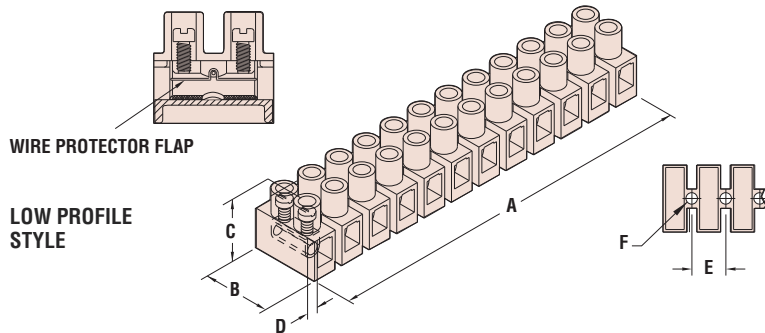

WIRE PROTECTOR FLAP

LOW PROFILE STYLE

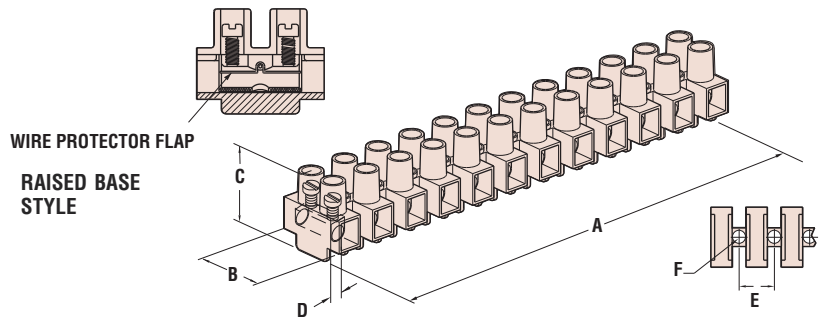

WIRE PROTECTOR FLAP

RAISED BASE STYLE

Quick Specs

Materials 6/6 Nylon and brass
 Certifications Recognized under Component Program of Underwriters' Laboratories to both Canadian and US requirements File E197025
 Approved
 Flammability Rating 94V-2
 Temperature Range -40°F (-40°C) to 284°F (140°C)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [Pro Elec](#) manufacturer:

Other Similar products are found below :

[00175550202](#) [MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-1510](#) [MBES-153](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-133](#) [MHE-163](#)
[MI-254 \(35\)](#) [MI-272](#) [8739](#) [880507](#) [880508](#) [MPT-275](#) [1546551-6](#) [ELM023100](#) [ELM10110G](#) [ELVD12100](#) [BA311TU](#) [BA411SU](#) [MV-152](#)
[MV-253/NCNOC](#) [MV-254-D](#) [MV-255](#) [MV-462](#) [MV-472](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVE-258](#) [MVE-273](#) [MVEB-153](#) [1700096](#)
[1702246](#) [1705142](#) [1712417](#) [1713020](#) [1713088](#) [1776118-2](#) [1790852](#) [1-796689-8](#) [1-796692-6](#) [1800001](#) [1800114](#) [1823215](#) [1838462](#)