


105



These Open Former Differential Mode Suppression Chokes, are specifically designed to attenuate mains borne RF interference.

Constructed using a single wound ferrite ring mounted vertically onto a flame retardant plastic carrier.

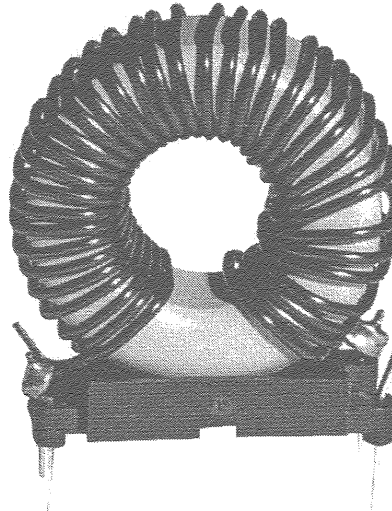

CHARACTERISTICS	
Voltage Range :	250 VAC
Live Frequency :	50 / 60Hz
Temperature Range :	-25°C to 85°C
Inductance Tolerance :	± 20%
Temperature Rise @ Rated Current :	30°C

PCB Drilling Detail

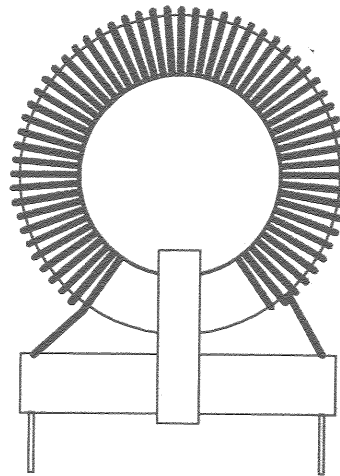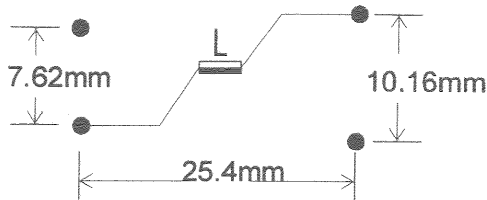

PART No.	AMP	INDUCTANCE	D.C. RESISTANCE (mΩ)
DF1	1	1.17 mH	1470
DF2	2	0.5 mH	370
DF3	3	0.26 mH	140
DF4	4	0.21 mH	100
DF5	6	0.12 mH	40
DF6	8	0.085 mH	25



Sales Office Tel : (01495) 307070

Fax : (01495) 306965

LCR
Capacitors

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [lcr manufacturer](#):

Other Similar products are found below :

[MR/P/440/5/C FP013](#) [MR/P/440/10/C 423663E FP006](#) [EXFS/HR 1000PF +/- 1%](#) [MR/P/440/4/C](#) [MR/P/440/6/B](#) [EXFS/HR 2200PF +/- 1%](#)
[FP005](#) [EP0880-PNF](#) [FSCEX 22000PF 1%63V](#) [EP0884/P](#) [PC/HV/S/WF 100NF 1.5KV](#) [MR/P/440/8/C](#) [MR/P/440/3/C](#) [PC/HV/S/WF 220NF](#)
[1KV](#) [LCR/0.01/1500/20](#) [DF2](#) [EP0885-PNF3](#) [EP0881-PNF](#) [MR/P/440/2/B](#) [MR/P/440/8/B](#) [MR3/420B 3UF/440VAC](#) [EP0886-PNF3](#) [FSCEX](#)
[6800PF 1%160V](#) [MR4/420B 4UF/440VAC](#) [EP0887-PNF3](#) [EP0882/P](#) [FSC 160V 56PF](#) [MR/P/440/2/C](#) [EP0882-PNF](#) [FSCEX 510PF 1% 630V](#)
[MR10/420B 10UF/440VAC](#) [PC/HV/S/WF 47NF 1KV](#) [FSCEX 3000PF 1%160V](#) [PC/HV/S/WF 2.2NF 1KV](#) [FSCEX 8200PF 1%160V](#) [V1004](#)
[FSC 160V 3300PF](#) [PC/HV/S/WF 10NF 1.5KV](#) [FSCEX 200PF 1% 630V](#) [EXFS/HR 6800PF +/- 1%](#) [FS/CEX 5600PF 1%160V](#) [EXFS/HR](#)
[220PF +/- 1%](#) [FSCEX 300PF 1% 630V](#) [FSCEX 7500PF 1%160V](#) [FSCEX 2000PF 1%160V](#) [FSCEX 5100PF 1%160V](#) [FSCEX 1200PF](#)
[1%160V](#)