
RoHS Compliant Pb - Lead Free	Ltr	Revisions	Date	Appr

## **Electrical Specifications:**

Nominal Frequency	18.432	MHz	
Mode of Oscillation	Fundamental	-	
Frequency Tolerance at 25°C	±30	PPM Max	
Frequency Stability over Temperature Range	±30		
Operating Temperature Range (Extended)	-40 to +85	• C	
Storage Temperature Range	-55 to +125		
Aging per Year	±3	PPM Max	
Load Capacitance	12		
Shunt Capacitance (Maximum)	7	— pF	
Equivalent Series Resistance (ESR)	50	Ohms Max	
Drive Level	100 Typ - 500 Max	uW	
Solder Reflow Characteristics	+260 for 10 s Max	° C	

## **Mechanical Specifications:**

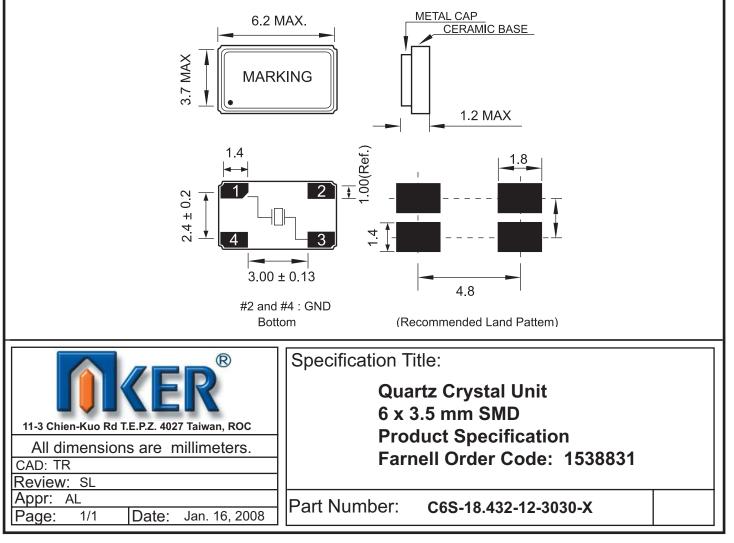

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for aker manufacturer:

Other Similar products are found below :

SMA-027000-3BL4TD
CXA-012000-3F4D40
CXA-016384-3D4X20
CXA-026000-3F7F20
C-3.579545-18-3050-X
49SN-027120-FX20X10

C5S-16.000-12-3030-X
SMF-020000-5BC6T0
SMA-040000-5CL4T5
CXAN-025000-3F12D40
C-8.000-18-3050-X
CXAN-040000 

3F15D41
SMBN-033333-7BL4T00
CXA-026000-3FCF20
CA-18.432-18-3050-X
CA-11.0592-18-3050-X
C-4.194304-18-3050-X
CXA 

039000-7F1X40
S33305-50.000-X
C3E-14.31818-12-3030-X
S53305-50.000-X
S73305-10.000-X-15
C6S-18.432-12-3030-X
C7S 

8.000-12-50100-X1
C-24.576-18-3050-X
C3E-14.7456-12-3030-X
C7S-6.000-12-50100-X1
CAA-4.194304-18-3050-X
C3E 

14.7456-12-50100-X1
C6S-16.000-12-3030-X
S73305T-24.000-X-15-R
CA-8.000-18-3050-X
C3E-16.000-12-50100-X1
S73305-12.000-X-15-R

15
49S-008000-FDRD10
S73305-14.7456-X-15
C3E-18.432-12-3030-X
C3E-20.000-12-50100-X1
CAA-3.579545-18-3050-X
C7S 

20.000-12-3030-X
C6S-24.000-12-3030-X
CA-25.000-18-3050-X
CAA-16.000-18-3050-X
49SN-011059-FX16X10
C7S-24.000-12-50100-X1

X1
CA4-8.000-18-3050-X
C3E-12.000-12-3030-X
C5S-20.000-12-3030-X
C3E-13.560-12-1010-X
S7A33025-156.250-L-