


CGPT

General Purpose, Flame-**Retardant*** Polyolefin Tubing

Product Facts

- 2:1 and 3:1 shrink ratio
- Very good chemical and solvent resistance
- Flexible
- Excellent physical and electrical performance
- RoHS compliant

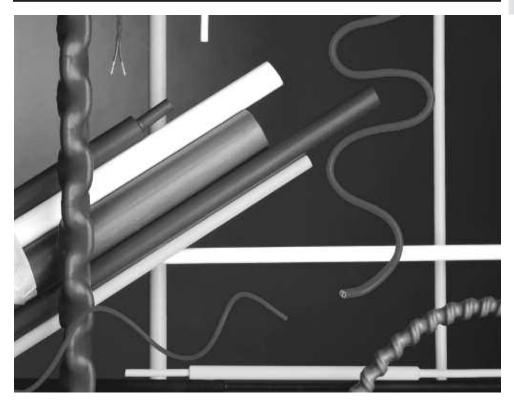

Applications

CGPT is a tough, flexible, general purpose polyolefin tubing with good resistance to common fluids and solvents and a high dielectric strength. Its unique blend of chemical, electrical, and physical properties makes it suitable for a wide range of applications, including electrical insulation, strain relief, cable bundling, colorcoding and identification of wires, cables, pipes, and electrical and electronic components, and mechanical protection.

Installation

Minimum shrink temperature: 80°C [176°F] Minimum full recovery temperature: 120°C [248°F]

Operating Temperature Range

-40°C to 135°C [-40°F to 275°F]

Specifications/Approvals

Series	ul RN °	CSA 🚯	Raychem	
CGPT	E35586 600 V, 125°C	LR31929 600 V, 125°C	RW-2059	

*Clear product (-X) is not flame-retardant.

		Available in	: Americas	Europe	Asia Pacific	
						1-11
9-1773447-9 CIS WR 08/2011	Dimensions are i millimeters unles specified. Values	ss otherwise	Dimensions are shown for reference purposes only. Specifications subject	USA: 1-800-522-6752 Canada: 1-905-475-6222 Mexico: 52-55-1106-0800	Germany: 49-6251-133-1999 China: 86-400-820-6015 Japan: 81-44-844-8013	
te.com	are metric equiva		to change.	L. & S. America: 54-11-4733-2200	UK: 44-800-267-666	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Shrink Tubing and Sleeves category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below :

 770-006S102
 5685710001
 CR8248-000
 CR9960-000
 603312-4
 607381P039
 611112-000
 617867N001
 6500750004
 CZ1420-000
 D-306-38

 770-007A303
 770-010Y106W1
 770-010Y706W1
 7771210001
 MFP-1/4"-Clear
 MFP-3/64"-Clear
 790-3012
 MFT-MT2000-NO.14-0-SP

 MHHT-4-15K2-G-104
 MIL-LT-1-1/2-4-SP
 MIL-LT-1-1/2-9-STK
 MIL-LT-1/2-2-STK
 MIL-LT-3/0-SP
 MIL-LT-3/32-0-SP
 MIL-LT-3/32-0-SP

 SP
 MIL-LT-3/4-6-SP
 MIL-LT-3/8-0-SP
 8159270001
 839602-000
 8423-6
 FP301-116-6"-Black
 FP301-1/2-48"-Black
 FP301-12-48"-Black-Hdr

 Hdr
 FP301-1/4-48"-Black
 FP301-1/4-48"-White-Hdr
 FP301-1-6"-Clear
 FP301-18-48"-Black-Hdr
 FP301-1/8-6"-Black
 FP301-18-6"-Black-Hdr

 Bulk
 FP301-316-48"-Blue-Hdr
 FP301-316-6"-Clear
 FP301-332-6"-Black
 912229N002
 120-126-16BL
 121-001-09
 121-018-32
 121-018-40

 121-123-1-1-32BTC
 121-123-1-1-40BTC
 I21-123-1-1-40BTC
 I20-126-16BL
 121-001-09
 121-018-32
 121-018-40