



MMBTRC101SS...MMBTRC106SS

NPN Silicon Epitaxial Planar Transistor

for switching and interface circuit and drive circuit applications

Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process

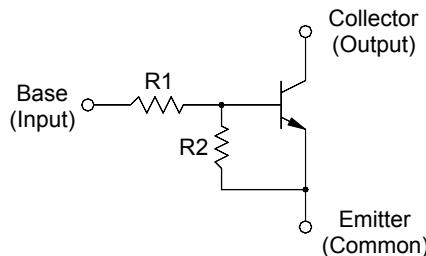


1. Base 2. Emitter 3. Collector
TO-236 Plastic Package

Resistor Values

Type	R1 (KΩ)	R2 (KΩ)
MMBTRC101SS	4.7	4.7
MMBTRC102SS	10	10
MMBTRC103SS	22	22
MMBTRC104SS	47	47
MMBTRC105SS	2.2	47
MMBTRC106SS	4.7	47

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Value	Unit
Output Voltage	V_O	50	V
Input Voltage	V_I	20, -10	V
		30, -10	
		40, -10	
		40, -10	
		12, -5	
		20, -5	
Output Current	I_O	100	mA
Total Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{stg}	- 55 to + 150	°C



SEMTECH ELECTRONICS LTD.




Dated :16/03/2015 Rev:02

MMBTRC101SS...MMBTRC106SS

Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_O = 5 \text{ V}$, $I_O = 10 \text{ mA}$	G_I	30	-	-	-
		50	-	-	-
		70	-	-	-
		80	-	-	-
		80	-	-	-
		80	-	-	-
Output Cutoff Current at $V_O = 50 \text{ V}$	$I_{O(OFF)}$	-	-	500	nA
Input Current at $V_I = 5 \text{ V}$	I_I	-	-	1.8	mA
		-	-	0.88	
		-	-	0.36	
		-	-	0.18	
		-	-	3.6	
		-	-	1.8	
Output Voltage at $I_O = 10 \text{ mA}$, $I_I = 0.5 \text{ mA}$	$V_{O(ON)}$	-	-	0.3	V
Input Voltage (ON) at $V_O = 0.2 \text{ V}$, $I_O = 5 \text{ mA}$	$V_{I(ON)}$	-	-	2	V
		-	-	2.4	
		-	-	3	
		-	-	5	
		-	-	1.1	
		-	-	1.3	
Input Voltage (OFF) at $V_O = 5 \text{ V}$, $I_O = 0.1 \text{ mA}$	$V_{I(OFF)}$	1	-	-	V
		0.5	-	-	
Transition Frequency at $V_O = 10 \text{ V}$, $I_O = 5 \text{ mA}$	$f_T^{(1)}$	-	200	-	MHz

¹⁾ Characteristic of transistor only.



SEMTECH ELECTRONICS LTD.



ISO TS 16949 : 2009
Certificate No. 160713009








ISO14001 : 2004
Certificate No. 7116

ISO 9001 : 2008
Certificate No. 50713410

BS-OHSAS 18001 : 2007
Certificate No. 7116

IECQ QC 080000
Certificate No. PRC-HSPM-1483-1

MMBTRC101SS...MMBTRC106SS

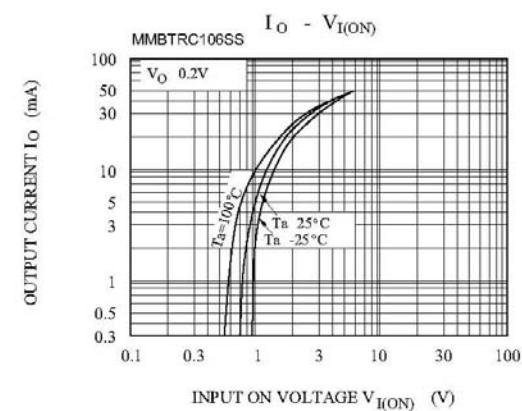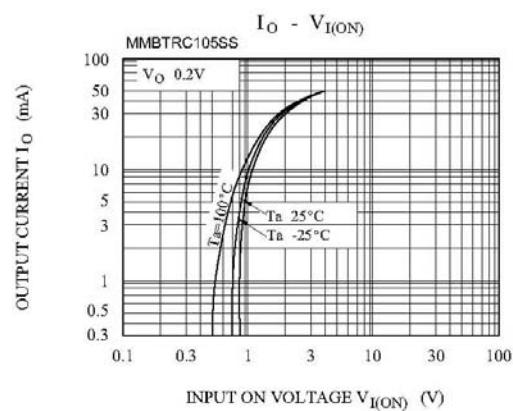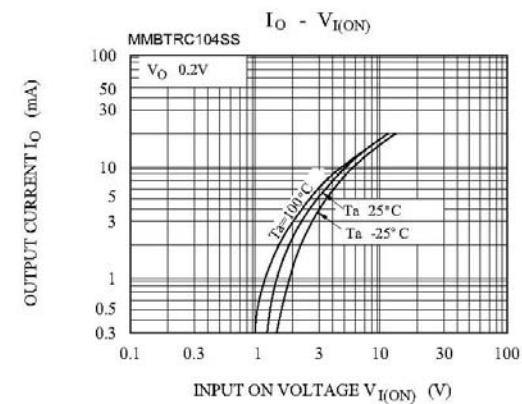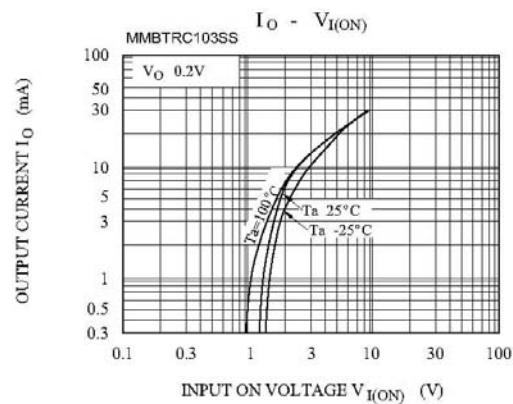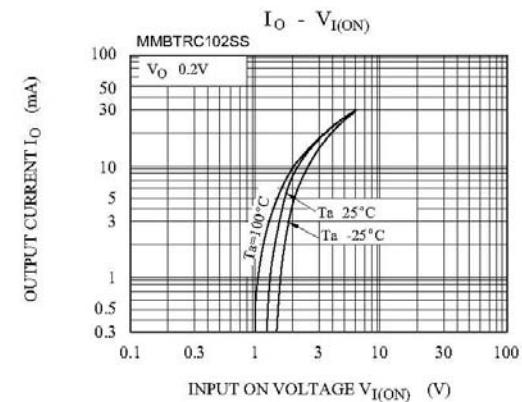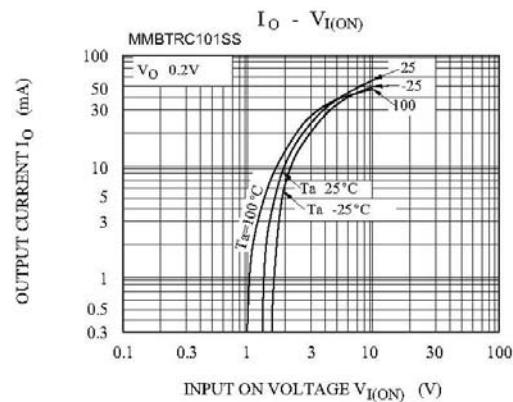

SEMTECH ELECTRONICS LTD.



ISO TS 16949 : 2009
Certificate No. 160713009



ISO 14001 : 2004
Certificate No. 7116



ISO 9001 : 2008
Certificate No. 50713410










BS-OHSAS 18001 : 2007
Certificate No. 7116



IECQ QC 080000
Certificate No. PRC-HSPM-1483-1

MMBTRC101SS...MMBTRC106SS



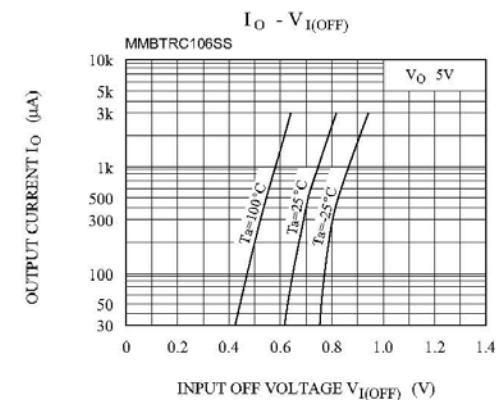
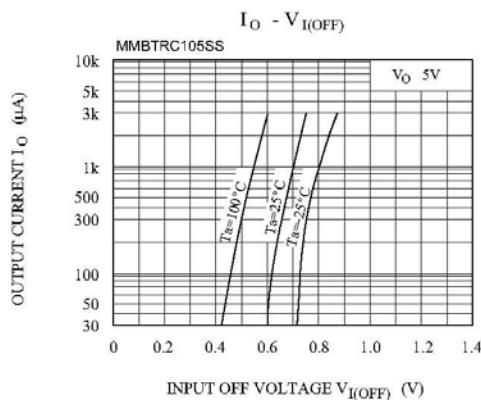
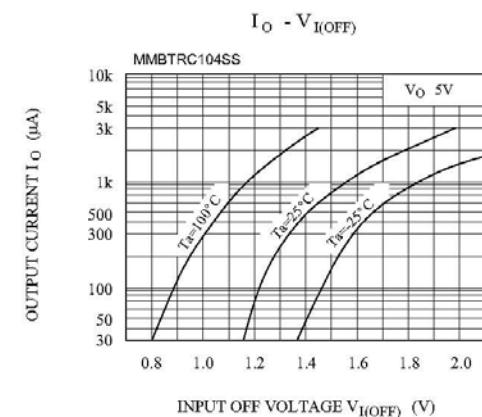
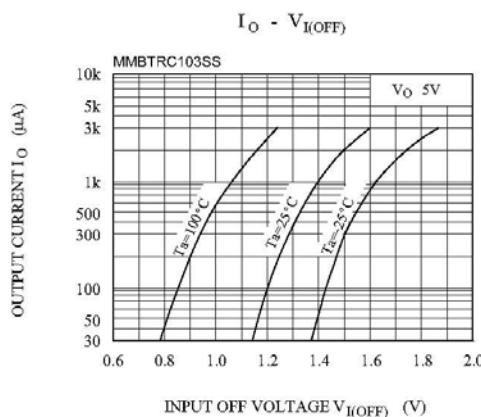
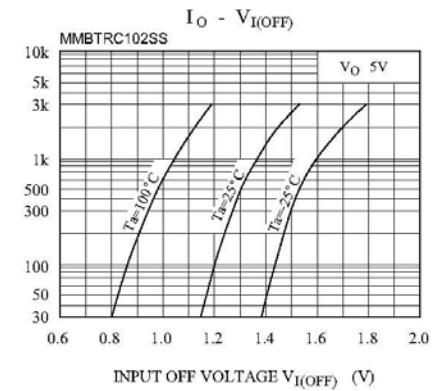
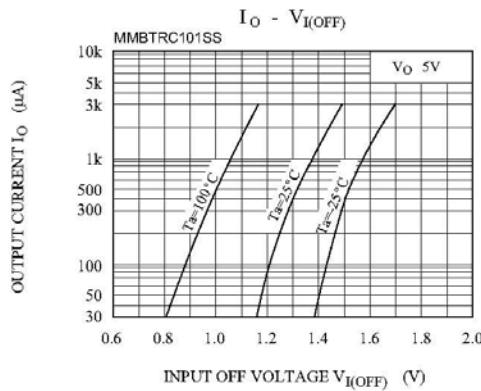


SEMTECH ELECTRONICS LTD.



Dated : 16/03/2015 Rev:02

MMBTRC101SS...MMBTRC106SS

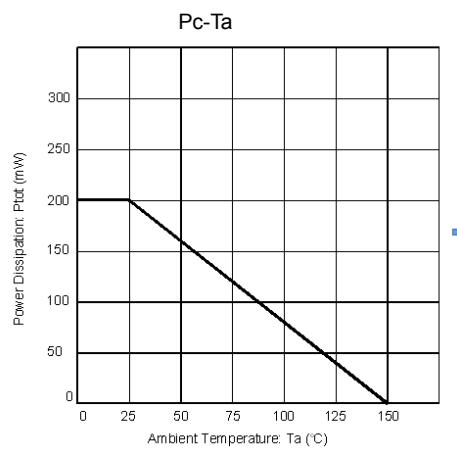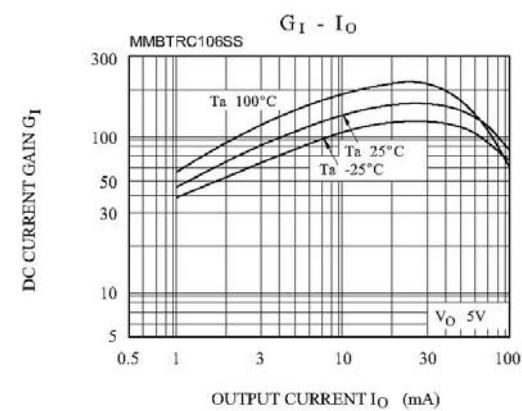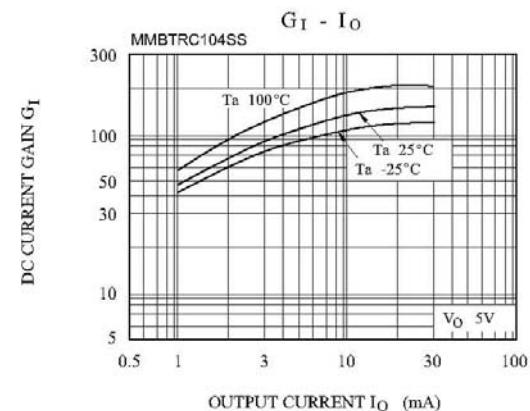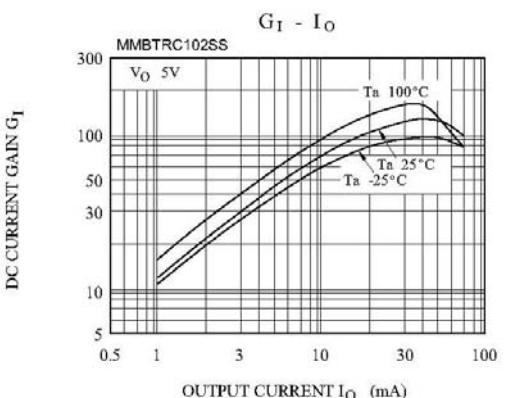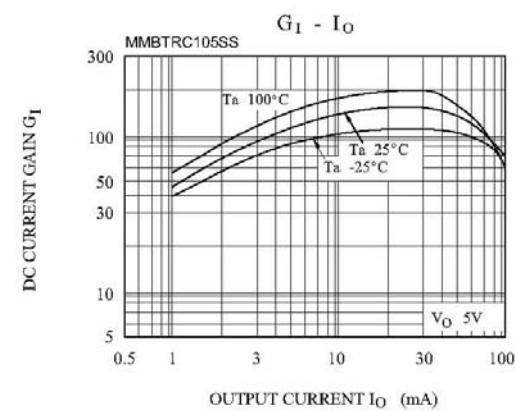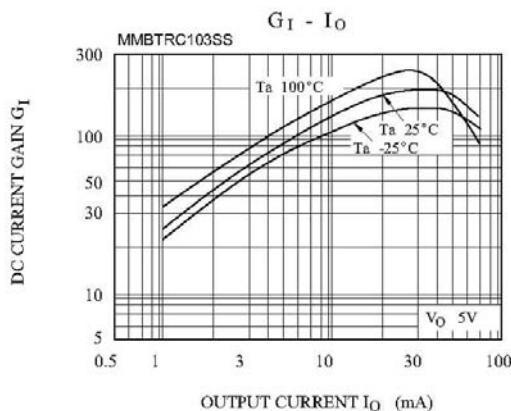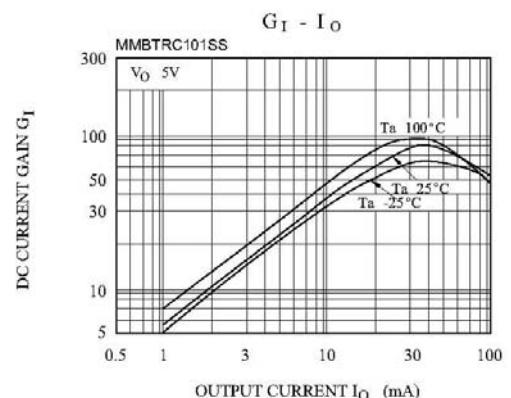

SEMTECH ELECTRONICS LTD.



ISO TS 16949 : 2009
Certificate No. 160713009



ISO 14001 : 2004
Certificate No. 77116



ISO 9001 : 2008
Certificate No. 50713410



BS-OHSAS 18001 : 2007
Certificate No. 7116



IECQ QC 080000
Certificate No. PRCHSPM-14831

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by SLKORMICRO manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)