



# MMDT5210W...MMDT521ZW

## NPN Silicon Epitaxial Planar Digital Transistor

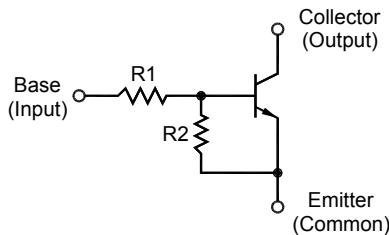


1.Base 2.Emitter 3.Collector  
SOT-323 Plastic Package

### Resistance Values

Type	R1 (KΩ)	R2 (KΩ)	Type	R1 (KΩ)	R2 (KΩ)
MMDT5210W	47	-	MMDT521DW	47	10
MMDT5211W	10	10	MMDT521EW	47	22
MMDT5212W	22	22	MMDT521FW	4.7	10
MMDT5213W	47	47	MMDT521KW	10	4.7
MMDT5214W	10	47	MMDT521LW	4.7	4.7
MMDT5215W	10	-	MMDT521MW	2.2	47
MMDT5216W	4.7	-	MMDT521NW	4.7	47
MMDT5217W	22	-	MMDT521TW	22	47
MMDT5218W	0.51	5.1	MMDT521VW	2.2	2.2
MMDT5219W	1	10	MMDT521ZW	4.7	22

### Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Parameter	Symbol	Value	Unit
Collector Base Voltage	$V_{CBO}$	50	V
Collector Emitter Voltage	$V_{CEO}$	50	V
Collector Current	$I_C$	100	mA
Total Power Dissipation	$P_{tot}$	200	mW
Junction Temperature	$T_j$	150	°C
Storage Temperature Range	$T_{stg}$	- 55 to + 150	°C



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited




# MMDT5210W...MMDT521ZW

## Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
DC Current Gain at $V_{CE} = 5 \text{ V}$ , $I_C = 10 \text{ mA}$	$h_{FE}$	20	-	-	-
		30	-	-	-
		35	-	-	-
		60	-	-	-
		60	-	200	-
		80	-	-	-
		80	-	400	-
		160	-	460	-
Collector Base Cutoff Current at $V_{CB} = 50 \text{ V}$	$I_{CBO}$	-	-	100	nA
Emitter Base Cutoff Current at $V_{EB} = 6 \text{ V}$	$I_{EBO}$	-	-	0.01	mA
		-	-	0.1	
		-	-	0.2	
		-	-	0.4	
		-	-	0.5	
		-	-	1	
		-	-	1.5	
		-	-	2	
Collector Base Breakdown Voltage at $I_C = 10 \mu\text{A}$	$V_{(BR)CBO}$	50	-	-	V
Collector Emitter Breakdown Voltage at $I_C = 2 \text{ mA}$	$V_{(BR)CEO}$	50	-	-	V
Collector Emitter Saturation Voltage at $I_C = 10 \text{ mA}$ , $I_B = 0.5 \text{ mA}$	$V_{CEsat}$	-	-	0.3	V
Transition Frequency at $V_{CB} = 10 \text{ V}$ , $-I_E = 5 \text{ mA}$ , $f = 100 \text{ MHz}$	$f_T$	-	250	-	MHz
Input Voltage (ON) at $V_O = 0.3 \text{ V}$ , $I_O = 20 \text{ mA}$ at $V_O = 0.3 \text{ V}$ , $I_O = 20 \text{ mA}$ at $V_O = 0.3 \text{ V}$ , $I_O = 2 \text{ mA}$ at $V_O = 0.3 \text{ V}$ , $I_O = 2 \text{ mA}$ at $V_O = 0.3 \text{ V}$ , $I_O = 2 \text{ mA}$ at $V_O = 0.3 \text{ V}$ , $I_O = 10 \text{ mA}$ at $V_O = 0.2 \text{ V}$ , $I_O = 5 \text{ mA}$ at $V_O = 0.3 \text{ V}$ , $I_O = 2 \text{ mA}$ at $V_O = 0.3 \text{ V}$ , $I_O = 5 \text{ mA}$ at $V_O = 0.2 \text{ V}$ , $I_O = 5 \text{ mA}$ at $V_O = 0.3 \text{ V}$ , $I_O = 5 \text{ mA}$ at $V_O = 0.3 \text{ V}$ , $I_O = 1 \text{ mA}$	$V_{I(ON)}$	-	-	3	
		-	-	2.5	
		-	-	2.5	
		-	-	5	
		-	-	4	
		-	-	3	
		-	-	3	V
		-	-	3	
		-	-	1.1	
		-	-	1.7	
		-	-	1.3	
		-	-	1.4	

<sup>1)</sup>  $h_{FE}$  Rank Classification: Q: 160~260, R: 210~340, S: 290~460, No-rank: 160~460



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited




# MMDT5210W...MMDT521ZW

---

## Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit
Input Voltage (OFF) at $V_{CC} = 5 \text{ V}$ , $I_O = 100 \mu\text{A}$	$V_{I(\text{OFF})}$	0.5	-	-	V
		0.5	-	-	
		0.3	-	-	
		0.4	-	-	
		1	-	-	
		0.8	-	-	
Input Resistance	R1	- 30%	0.51		$\text{K}\Omega$
			1	+ 30%	
			2.2		
			4.7		
			10		
			22		
			47		
Resistance Ratio	R1/R2	-	0.047	-	-
			0.1	-	
			0.08	0.1	
			-	0.21	
			0.17	0.21	
			-	0.25	
			0.47	-	
			0.37	0.47	
			-	0.57	
			1	-	
			0.8	1	
			1.7	2.13	



**SEMTECH ELECTRONICS LTD.**  
Subsidiary of Sino-Tech International (BVI) Limited



# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by SLKORMICRO manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)  
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)