


## HALOGEN (H3 55W) Details

Back

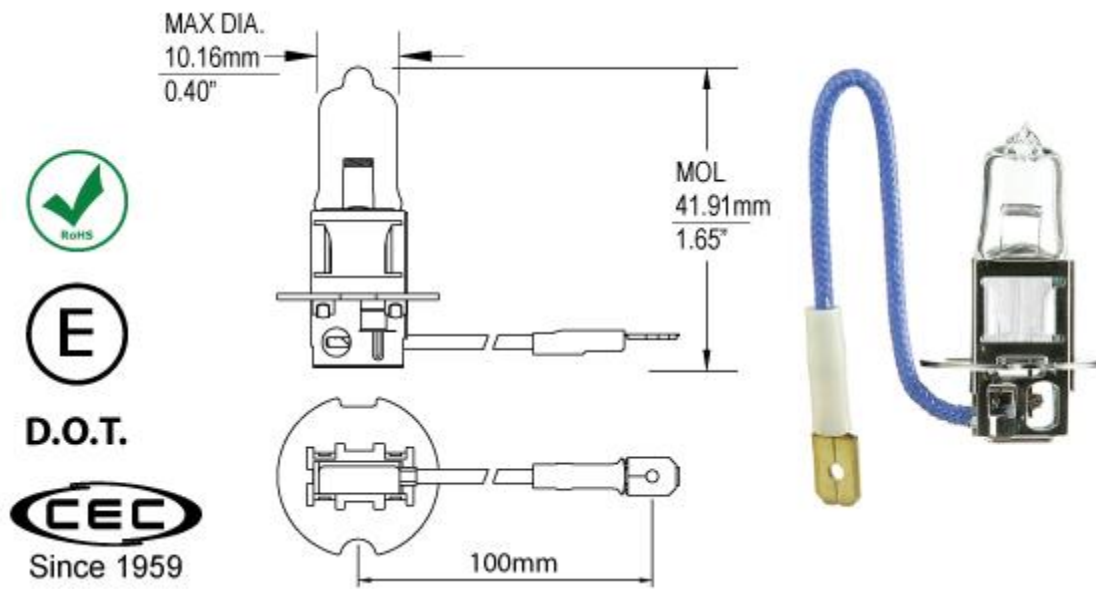

Part #	H3 55W				
Description	H3 12V 55W PK22S				
Bulb Shape	T3 1/4	Filament	C-6	Base Style	PK22s
Glass Diameter	0.45 in/ 11.43 mm	Lumens	1450	Base Material	Metal
Design Wattage	68	MSCP <sup>†</sup>	115	RoHS Compliant	Yes
Design Voltage	13.2	MOL <sup>‡</sup>	1.65 in/ 41.91 mm	Rated Avg Life Hrs	400
Design Amps	4.58	LCL <sup>††</sup>	0.70 in/ 17.78 mm	Headlight Socket	

**† MSCP (Mean Spherical Candlepower):**

Candlepower produced at design volts. Candlepower is increased rapidly with an increase of applied voltage and conversely is reduced rapidly with a reduction of applied voltage.

**‡ MOL (Maximum Overall Length):**

The overall length of a lamp, from the top of the shell to the bottom of the base.

**†† LCL (Light Center Length):**

The distance from a reference point, usually the bottom of the lamp base, to the center of the light source.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [cec manufacturer](#):*

Other Similar products are found below :

[303](#) [1815](#) [120PSB](#) [H3-70W/24V](#) [28PSB](#) [L20120CS-W](#) [81](#) [657](#) [1820](#) [1866](#) [112](#) [E85](#) [1141](#) [3175](#) [927](#) [H3-55W](#) [161](#) [1813](#) [908](#) [93](#) [243](#) [655](#)  
[1829](#) [46](#) [47](#) [130MB](#) [680](#) [85](#) [756](#) [1819](#) [120MB](#) [51](#) [388](#) [2821](#) [40](#) [1156](#) [1818](#) [N-F-24.000M-10-1015-3085-40](#) [7371](#) [50](#) [44](#) [1847](#) [7219](#) [1835](#)  
[757](#) [K-F-25.000M-16-1010-2070-30](#) [K-F-12.000M-16-2030-2070-100](#) [755](#) [K-F-16.000M-9-2020-2070-60](#) [KC-F-26.000M-9-1010-2070-60](#)