


TYPE : MV002 Series Relay

Revised : 2015-01-24
 Issued : 2012-08-22

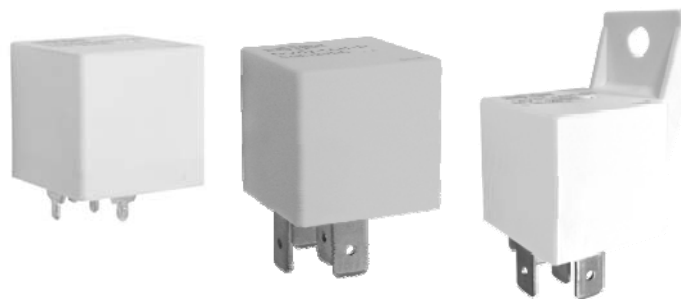

■ Type List

Terminal style	Contact form	Designation (provided with)		
		Dust cover	Flux tight	Flanged cover (Dust cover)
Plug-in terminal	1A (SPDM)	MV002-1AH-F-D	-----	MV002-1AH-F-D1
		MV002H-1AH-F-D		MV002H-1AH-F-D1
PCB terminal		-----	MV002P-1AH-F-C	-----
			MV002HP-1AH-F-C	

■ Ordering Information

MV002 H P - 1A H - F - C - R1 XXX
 1 2 3 4 5 6 7 8 9

- | | |
|--|---|
| 1. MV002 -- Basic series designation | S -- Sealed type washable |
| | D1 -- Flanged cover (Dust cover) |
| 2. Blank -- Standard | C1 -- Flanged cover (Flux tight) |
| H -- High power type | S1 -- Flanged cover (Sealed type washable) |
| | D1SW -- Steel bracket (dust cover with weather proof) |
| 3. Blank -- Socket terminal | D1SF -- Steel bracket (dust cover with shroud) |
| P -- PCB terminal | D1S -- Steel bracket (dust cover) |
| 4. 1A -- Single-pole, double-make (SPDM) | C1S -- Steel bracket (flux tight) |
| | S1S -- Steel bracket (sealed type washable) |
| 5. H -- Contact material Ag alloy | |
| | 8. Blank -- Standard type |
| 6. Blank -- Standard type | R1 -- Coil parallel with resistor 1/2W for 12V 680Ω |
| F -- Class F | |
| 7. D -- Dust cover | 9. XXX -- Special feature code |
| C -- Flux tight | |

■ Contact Rating

Type	Standard	High power type
Rated load (Resistive)	30A 60VDC	40A 60VDC
	20A 72VDC	
Max. Switching Capacity	1800W	2400W

TYPE : MV002 Series Relay

Revised : 2015-01-24
 Issued : 2012-08-22

■ Coil Rating (DC)

Rated voltage (V)	Rated current $\pm 10\%$ at 23°C (mA)	Coil resistance $\pm 10\%$ at 23°C (Ω)	Pick up Voltage (Max) at 23°C	Drop out Voltage (Min) at 23°C	Max. continuous voltage at 23°C ⁽¹⁾	Power consumption at rated voltage
12	133.3	90	75% of rated voltage	5% of rated voltage	130% of rated voltage	approx. 1.6W
24	66.7	360				
48	33.3	1440				

Notes : (1) Without contact load.

■ Specification

Contact material	Ag alloy	
Voltage drop ⁽¹⁾	Typ.50 mV at 10A	
Operate time ⁽¹⁾	20ms Max.	
Release time ⁽¹⁾	20ms Max.	
Insulation resistance ⁽¹⁾	20M Ω Min. (DC 500V)	
Dielectric strength ⁽¹⁾	Between open contact	: AC 750V, 50/60Hz 1 min.
	Between contact and coil	: AC 750V, 50/60Hz 1 min.
Vibration resistance	Operating extremes	10~500Hz, 5.0G
	Damage limits	10~500Hz, 5.0G
Shock resistance	Operating extremes	10G
	Damage limits	100G
Life expectancy	Mechanical	1000,000 operations (frequency 9,000 operations/hr)
	Electrical	10,000 operations (frequency 600 operations/hr)
Operating ambient temperature	-40~+85°C (no freezing)	
Weight	Approx. 40 g	

Note : (1) Initial value. Operate and release time excluding contact bounce.

- (2) All tests are conducted under room temperature and room humidity.
- (3) Consider the heat of PCB is necessary, please check the actual condition of PCB.
- (4) If it includes ripple, the ripple factor should be less than 5%. And do not have a parallel connection with diode for the purpose of coil surge instead of diode, a varistor (ZNR) is recommend for the absorber.
- (5) Do not use the relay exceeding the coil rating, contact rating and life expectancy, or this may cause the risk of overheating.
- (6) To assure optimum performance, avoid the relay from dropping, hitting, or other unnecessary shocks.
- (7) Do not switch the contacts without any load as the contact resistance may become increased rapidly.

TYPE : MV002 Series Relay

Revised : 2015-01-24
 Issued : 2012-08-22

(8) Use suitable harnesses and bus bars according to the current as below :

30A type : Min. 6 mm² ; 40A type : Min. 10 mm²

(9) Please contact Song Chuan for the detailed information.

■ Safety Approval

Certified	UL / CUL
File No.	E88991

■ Safety Approval Rating

MV002	MV002H
30A 60VDC	55A 60VDC

Confirmed by	Checked by	Prepared by
副董事長 吳頌仁 15'.03.12	技術協理 葉家昇 15'.03.11	文管課長 胡麗珠 15'.01.24

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Relays](#) category:

Click to view products by [Song Chuan](#) manufacturer:

Other Similar products are found below :

[7-1414968-8](#) [7-1617345-6](#) [9-1617516-5](#) [1393204-2](#) [1393302-3](#) [1432872-1](#) [AR4-15F11-S01](#) [AR4-15H11](#) [1617518-5](#) [2-1617057-2](#) [CB1F-M-12V-H15](#) [898H-1AH-D-001-12VDC](#) [AR4-11F11](#) [AR4-15F11](#) [AR4-41F11](#) [41FZ-200ACG-BSL](#) [5-1616920-2](#) [5407-0011-HS](#) [CB1AF-M-12V-H59](#) [5-1617346-8](#) [1-1617059-9](#) [V23134A1052X299](#) [6-1393298-2](#) [6-1393302-1](#) [V23086R1801A403-EV-CBOX](#) [V23134B0053G242](#) [897H-1AH-D-R1-U01-12VDC](#) [871-1A-S-12VDC](#) [V23086-R1851-A502](#) [RE031005](#) [1393204-1](#) [23234B0001X001-EV-144](#) [AZ979-1A-24D](#) [V23086R1802A803](#) [V23134A 53C643](#) [1-1393387-8](#) [V23134J2053X194](#) [VF7-11F11-S01](#) [FBR56ND12-W1](#) [FBR572ND24-W](#) [LQ-12S](#) [S11-1A-C1-12VDC](#) [S11-1A-C1-24VDC](#) [833HM-1C-C-12VDC](#) [FRC2U-DC12](#) [FRC6BC-1-DC12](#) [V23333Z1001B045-EV-441](#) [V23074A1001A402](#) [FTR-P6GN012WA](#) [VTF-12F21](#)