


## Silicon PNP Power Transistor

### DESCRIPTION

- Low Collector Saturation Voltage  
 $V_{CE(sat)} = -0.5(V)(Max) @ I_C = -5A$
- Good Linearity of  $h_{FE}$

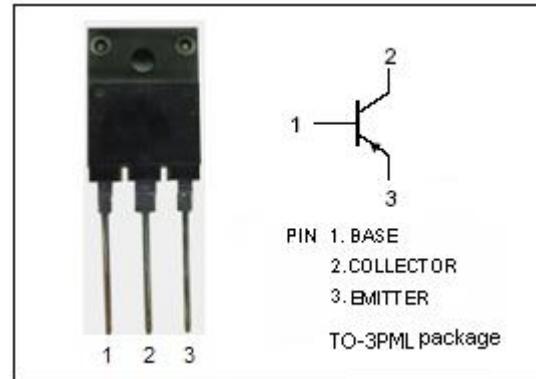


### APPLICATIONS

- Designed for chopper regulator, switch and general purpose applications

### ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ C$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	-70	V
$V_{CEO}$	Collector-Emitter Voltage	-50	V
$V_{EBO}$	Emitter-Base Voltage	-6	V
$I_C$	Collector Current-Continuous	-12	A
$I_{CM}$	Collector Current-Peak	-20	A
$I_B$	Base Current-Continuous	-4	A
$P_c$	Collector Power Dissipation @ $T_c=25^\circ C$	60	W
$T_J$	Junction Temperature	150	°C
$T_{stg}$	Storage Temperature Range	-55~150	°C

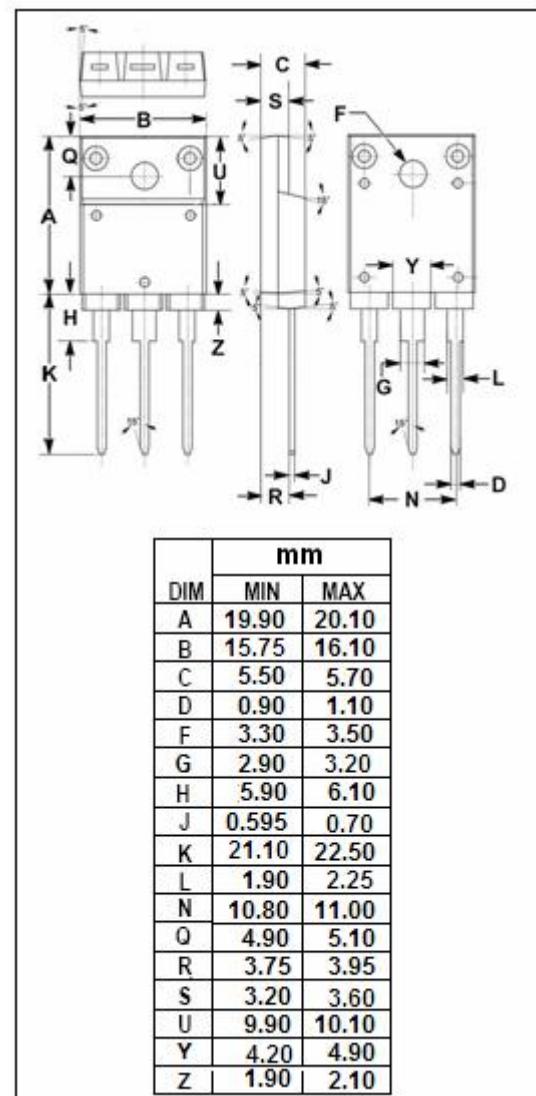

### Ordering Information

Product	Package	Packaging
2SA1746T5TL	TO-3PML	Tube



2SA1746T5TL

## ELECTRICAL CHARACTERISTICS

T<sub>c</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage	I <sub>C</sub> = -25mA ; I <sub>B</sub> = 0	-50			V
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = -5A; I <sub>B</sub> = -80mA			-0.5	V
V <sub>BE(sat)</sub>	Base-Emitter Saturation Voltage	I <sub>C</sub> = -5A; I <sub>B</sub> = -80mA			-1.2	V
I <sub>CBO</sub>	Collector Cutoff Current	V <sub>CB</sub> = -70V ; I <sub>E</sub> = 0			-10	μ A
I <sub>EBO</sub>	Emitter Cutoff Current	V <sub>EB</sub> = -6V; I <sub>C</sub> = 0			-10	μ A
h <sub>FE</sub>	DC Current Gain	I <sub>C</sub> = -5A ; V <sub>CE</sub> = -1V	50			
C <sub>OB</sub>	Output Capacitance	I <sub>E</sub> = 0 ; V <sub>CB</sub> = -10V;f= 1.0MHz		400		pF
f <sub>T</sub>	Current-Gain—Bandwidth Product	I <sub>E</sub> = 1A ; V <sub>CE</sub> = -12V		25		MHz

## Switching Times

t <sub>on</sub>	Turn-on Time	I <sub>C</sub> = -5A , R <sub>L</sub> = 4 Ω , I <sub>B1</sub> = -I <sub>B2</sub> = -80mA,V <sub>CC</sub> = -20V		0.5		μ s
t <sub>stg</sub>	Storage Time			0.6		μ s
t <sub>f</sub>	Fall Time			0.3		μ s

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by SPS manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)  
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)