
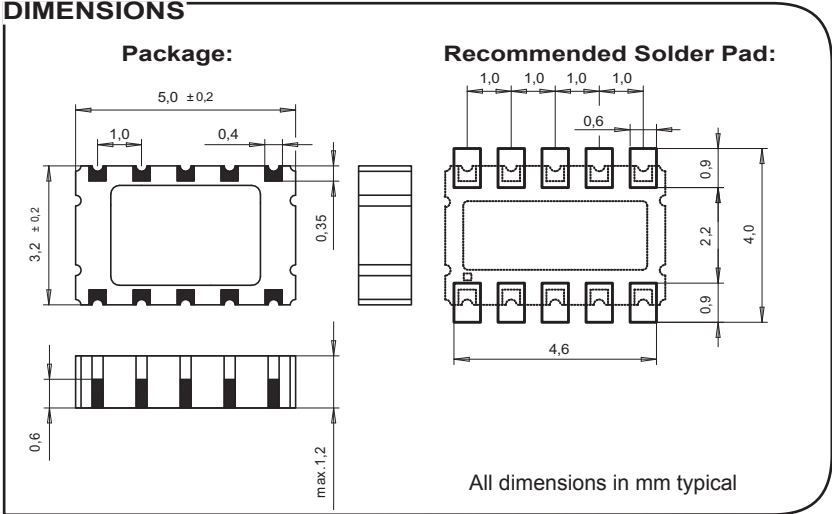


RV-2123-C2

Real Time Clock Module with SPI Bus

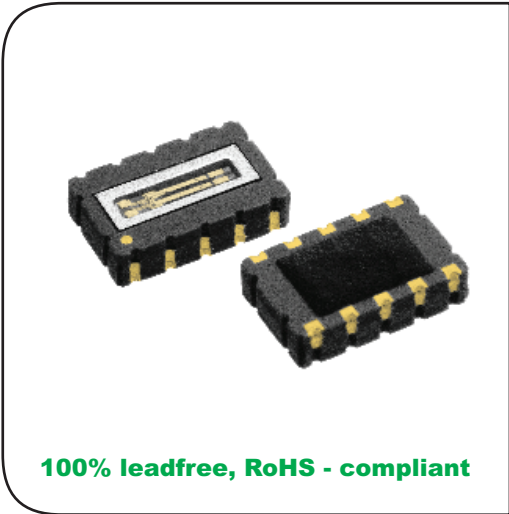


Ultra low power consumption 130nA
Automotive qualified, according to AEC-Q200 Rev. C
Xtal integrated solution.
Frequency-Offset Trimming Register
Miniature SMT ceramic package
Very tight frequency tolerance
SPI Bus Interface (SCL up to 8 MHz)
Programmable Clock-output
Low aging
Time keeping mode down to 1.1 V
Programmable alarm, timer and interrupt functions

DESCRIPTION:

This RTC IC has been specially designed to achieve an ultra-low power consumption of typically 130nA @ V_{DD} 3.0V in time-keeping mode. The very small SMT ceramic-package combines the 32.768 kHz crystal unit with the CMOS-based oscillator and real-time-clock circuitry. The calendar function tracks year, month, date, and day-of-the-week with built-in century and leap-year flags. The clock function tracks minute and second in 24-hour format. Programmable alarm setting and universal timer functions increase flexibility.

For pick-and-place equipment, the parts are available in 12 mm tape:
 7" (178 mm) reel with 1'000 parts
 13" (330 mm) reel with 5'000 parts

BLOCK DIAGRAM:

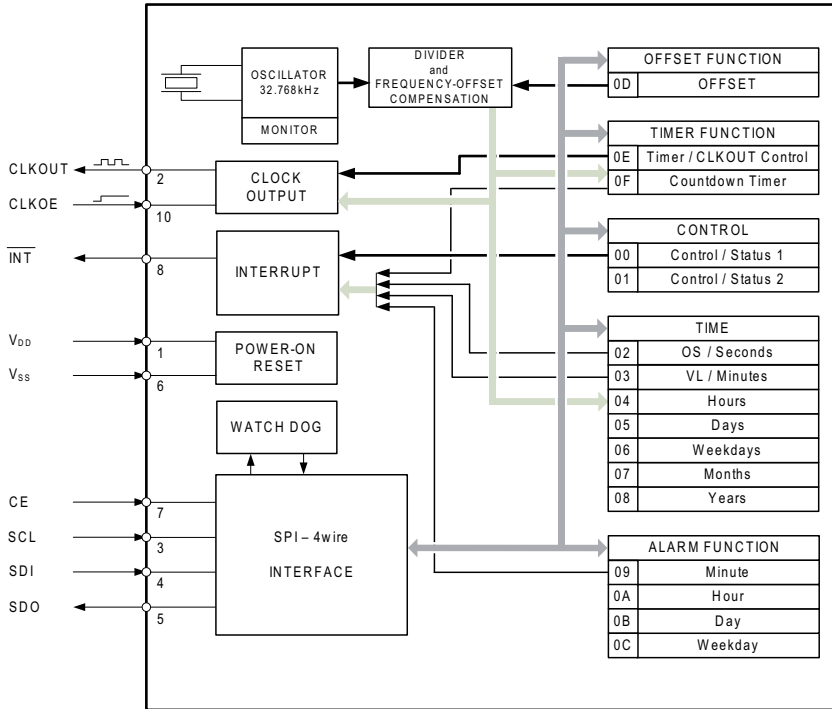

**ELECTRICAL CHARACTERISTICS
AT 25°C:**

	Symbol	Condition	Min.	Typ.	Max	Unit
Supply voltage	V _{DD}	SPI Bus Active	1.6		5.5	V
Supply voltage	V _{DD}	Time keeping	1.1		5.5	V
Current consumption during access	I _{DD}	fsc1=1 MHz V _{DD} 3 V		30	80	μA
		fsc1=4.5 MHz V _{DD} 3 V		250	400	μA
Current consumption Time keeping mode	I _{DDO}	fsc1=0 Hz, V _{DD} 3 V		130	180	nA
		fsc1=0 Hz, V _{DD} 1 V		110	160	nA
CLKOUT frequency		Programmable	32768...to...1			Hz
Frequency tolerance	ΔF/F	@ 25°C	±10 / ±20 ¹⁾			ppm
Aging first year max.	ΔF/F	@ 25°C	± 3			ppm
Frequency vs. temp.	ΔF/F _O	20 ≤ T ₀ ≤ 30	-0.035 ppm/°C·(T - T ₀) ² ±10%			ppm

1) Tighter and wider frequency tolerances on request.


**ENVIRONMENTAL
CHARACTERISTICS:**

		Conditions	Max. Dev.
Storage temp. range		-55 to +125°C	
TA Operating temperature range		-40 to +85°C	
Shock resistance	ΔF/F	5000 g, 0.3 ms, ½ sine	+/-5 ppm
Vibration resistance	ΔF/F	20 g / 10-2000 Hz	+/-5 ppm

**TERMINATIONS AND
PROCESSING:**

Package-Type	Termination	Processing
SON 10-pin	For SMD mounting Au plated pads	Reflow soldering 260°C / 20 s max.

**CURRENT CONSUMPTION vs.
POWER SUPPLY VOLTAGE:**

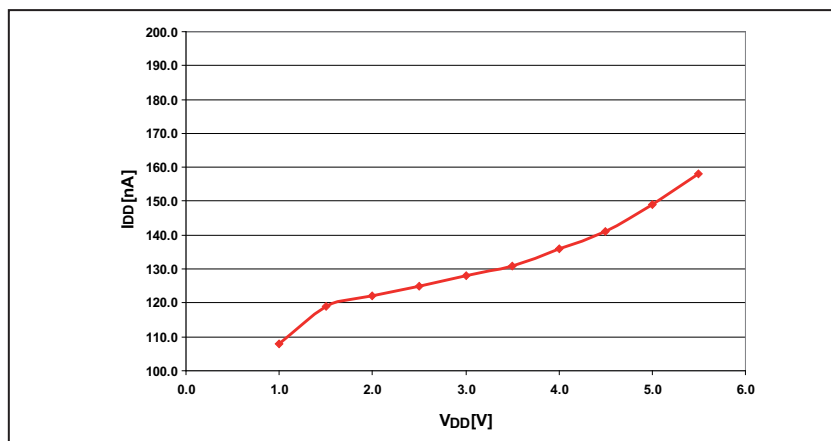

**PIN CONNECTIONS
TOP VIEW:**

Product Marking
#10 #6
2123
#1 #5
Pin 1 Index

Pin	Connection	
1	V _{DD}	Power Supply Voltage
2	CLKOUT	Frequency output
3	SCL	Serial clock input
4	SDI	Serial Data In
5	SDO	Serial Data Out
6	V _{SS}	Ground
7	CE	Chip Enable
8	$\overline{\text{INT}}$	Interrupt output
9	NC	not connected
10	CLKOE	CLK output enable

All specifications subject to change without notice.



Micro Crystal AG
Mühlestrasse 14
CH-2540 Grenchen
Switzerland

Tel. +41 32 655 82 82
Fax +41 32 655 82 83
sales@microcrystal.com
www.microcrystal.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [micro crystal manufacturer](#):

Other Similar products are found below :

[RV-8523-C3-EVALUATION-BOARD](#) [RV-3028-C7 ON BOARD 32.768kHz TA QC](#) [RV-3049-C2-EVALUATION-BOARD-OPTION-B](#) [RV-3029-C2-EVALUATION-BOARD-OPTION-B](#) [RV-8803-C7-32.768k-3PPM-TA-QA](#) [RV-8803-C7-EVALUATION-BOARD](#) [OV-7604-C7-EVALUATION-BOARD](#) [RV-8263-C7-EVALUATION-BOARD](#) [CM7V-T1A-32.768kHz-9pF-20PPM-TC-QC](#) [RV-2251-C3-EVALUATION-BOARD](#) [RV-3029-C3-32.768k-OPTION-B-TB-QA](#) [RV-3029-C3-TB-QA-OPT.B](#) [CC4V-T1A-32.768kHz-9pF-20PPM-TA-QC](#) [RV-2123-C2-TA-QC-020](#) [CC4V-T1A 32.768KHZ +-20PPM 9PF](#) [MS1V-T1K-32.768kHz-7pF-20PPM-TA-QC-Au](#) [CC7V-T1A-32.768k-12.5pF-20PPM-TA-QA](#) [CC4V-T1A 32.768KHZ 12.5PF +-20PPM](#) [CM7V-T1A-32.768k-6pF-20PPM-TB-QA](#) [RV-3029-C2-TB-QA-OPT.A](#) [OM-0100-C8-100.00kHz-20PPM-TA-QC](#) [CM7V-T1A-32.768k-9pF-20PPM-TA-QA](#) [CM8V-T1A-32.768kHz-7pF-20PPM-TB-QC](#) [RV-3049-C3-TB-QA-OPT.A](#) [CC5V-T1A 32.768KHZ +-20PPM 9PF](#) [RV-8564-C3-TA-QC-020](#) [MS1V-T1K 32.768KHZ +-20PPM 10PF](#) [CC7V-T1A-32.768k-9pF-20PPM-TC-QA](#) [CM7V-T1A-32.768kHz-12.5pF-100PPM-TC-QC](#) [RV-3029-C3-32.768k-OPTION-A-TB-QA](#) [CM7V-T1A-32.768k-9pF-20PPM-TC-QA](#) [CC7V-T1A-32.768kHz-7pF-20PPM-TB-QC](#) [CM7V-T1A-100.000kHz-9pF-100PPM-TA-QC](#) [RV-4162-C7-TA-QC-020](#) [CC7V-T1A-32.768k-9pF-20PPM-TA-QA](#) [RV-3029-C2-32.768k-OPTION-A-TB-QA](#) [RV-3049-C3-32.768kHz-OPTION-B-TA-QC](#) [RV-8564-C2-32.768kHz-20PPM-TA-QC](#) [CC7V-T1A-32.768kHz-7pF-10PPM-TA-QC](#) [CM7V-T1A-32.768k-9pF-20PPM-TB-QA](#) [OM-7605-C8-20PPM-TA-QA](#) [CC7V-T1A-32.768k-12.5pF-20PPM-TB-QA](#) [CC7V-T1A-32.768kHz-12.5pF-10PPM-TA-QC](#) [OV-7604-C7](#) [RV-3149-C3 32.768kHz OPTION B TA QC](#) [RV-3049-C3-32.768k-OPTION-B-TB-QA](#) [CC4V-T1A-32.768kHz-7pF-20PPM-TA-QC](#) [CM9V-T1A-32.768kHz-7pF-100PPM-TA-QC](#) [CM7V-T1A-32.768k-7pF-100PPM-TB-QA](#) [CM7V-T1A-0.3-32.768kHz-9pF-20PPM-TA-QC](#)