


For In-Circuit- and Functional Test (ICT/FCT)

Centers 1,27 mm/50 mil

	Current	Temperature
Standard	2,0 A	-20°... +80° C

F788

The F788 is often combined with the F703 (75 mil), F585 (100 mil) and F786 (100 mil). The receptacle H787 allows a variable projection height. For a fixed projection height of 16,0 mm the receptacle H768 is used. The receptacles can also be ordered with 500 mm preattached stranded wire (0,08 mm²/AWG28) using the part number H787LI. Delivery time on request.

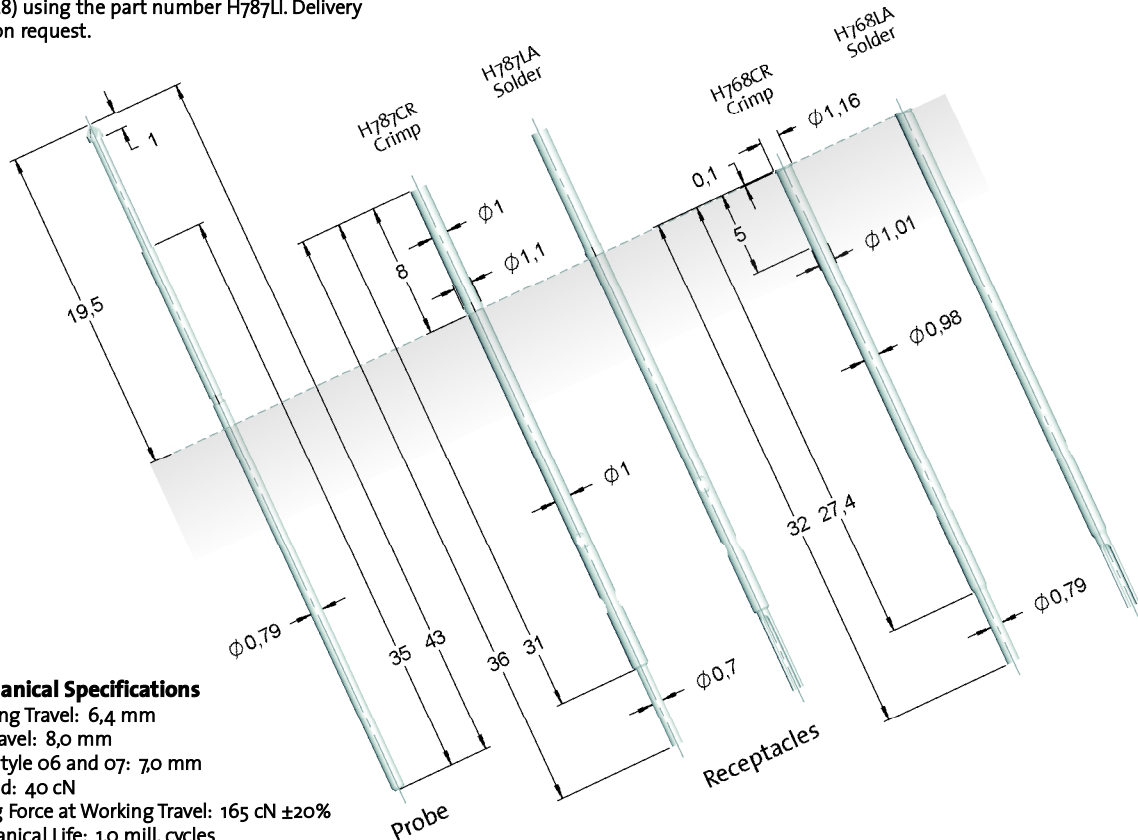

Mechanical Specifications

Working Travel: 6,4 mm

Full Travel: 8,0 mm

Tip Style 06 and 07: 7,0 mm

Preload: 40 cN

Spring Force at Working Travel: 165 cN ±20%

Mechanical Life: 1,0 mill. cycles

Pointing Accuracy: ±0,1 mm

Electrical Specifications

Maximum Continuous Current: 2,0 A

Typical Probe Resistance: 35 mOhm

Materials and Finishes

Plunger: see Tip Style

Barrel: Bronze, Gold plated

Spring: Music Wire, Silver plated

Receptacle: Bronze, Gold plated (H768)

Nickel Silver, Gold plated (H787)

Projection Height

H787CR	H787LA	H768CR	H768LA
11,5 - 19,5 mm	11,5 - 19,5 mm	16,0 mm	16,0 mm


Order Example

F788 **06 B** **090 G** **165**

Type: F788 Tip Diameter: 090 Spring Force: 165
 Tip Style: 06 Material: B Plunger Finish: G

Material: B = BeCu, S = Steel
Tip Diameter: 0,9 mm = 090
Plunger Finish: G = Gold plated, L = Longtime gold plated
Receptacle: Order Number see drawing

Plunger Tip Style, Material, Finish and Tip Diameter

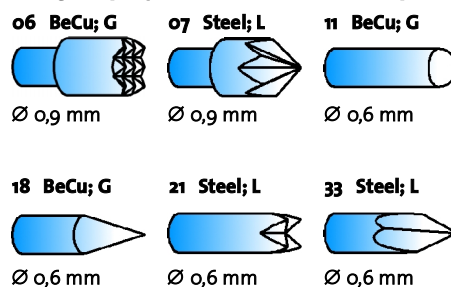

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [feinmetall](#) manufacturer:

Other Similar products are found below :

[F11121S053N085](#) [H702](#) [F88517K230U350SM](#) [F11107S090N085](#) [I-G1S1](#) [F70611B130G200](#) [F11103S053N085](#) [I-Z1](#) [F07506B120G150](#)
[F77206B200G300](#) [F77205B200G300](#) [F70211B130G130](#) [F10011B090G200](#) [H772LA](#) [F77218B130G300](#) [F77207S200L300](#) [H111LA](#) [I-G1](#)