

DESCRIPTION

- High Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)} = 400V$ (Min)
- High Switching Speed

APPLICATIONS



- Power switching
- Power amplification
- Power driver

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	PARAMETER	MAX	UNIT
V_{CBO}	Collector-Base Voltage	450	V
V_{CEO}	Collector-Emitter Voltage	400	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current-Continuous	15	A
I_{CM}	Collector Current-Peak	30	A
I_B	Base Current-Continuous	6	A
P_C	Collector Power Dissipation @ $T_C=25^\circ C$	100	W
T_j	Junction Temperature	200	$^\circ C$
T_{stg}	Storage Temperature Range	-65~200	$^\circ C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th j-c}$	Thermal Resistance, Junction to Case	1.0	$^\circ C/W$

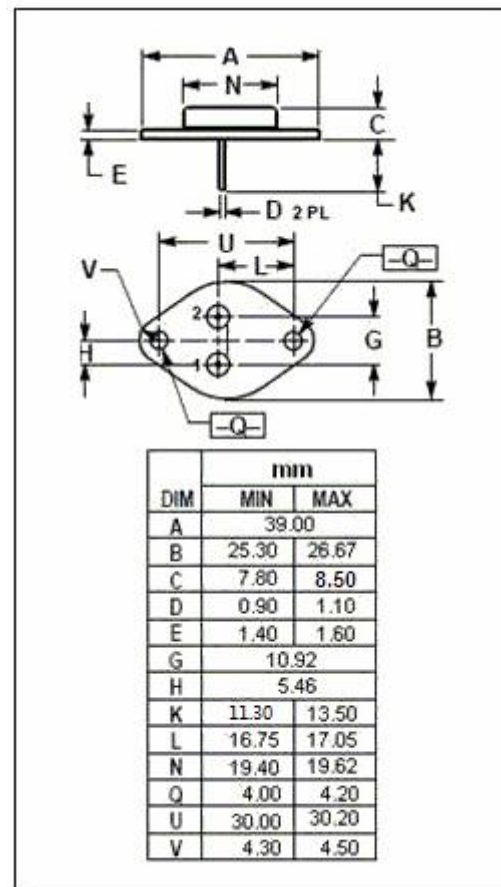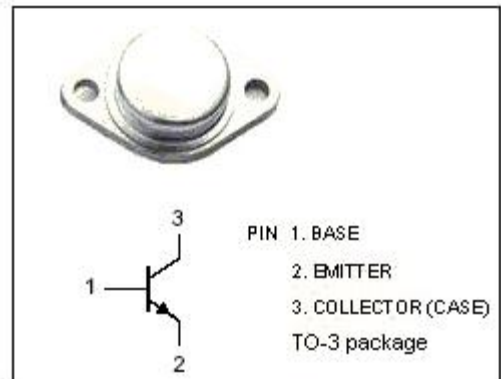

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CEO(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C= 50\text{mA}; L= 25\text{mH}$	400			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C= 6\text{A}; I_B= 1.2\text{A}$			1.2	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C= 6\text{A}; I_B= 1.2\text{A}$			1.5	V
h_{FE}	DC Current Gain	$I_C= 5\text{A}; V_{CE}= 2\text{V}$	12		60	
h_{FE}	DC Current Gain	$I_C= 10\text{A}; V_{CE}= 2\text{V}$	6		30	
I_{CBO}	Collector Cutoff Current	$V_{CB}= 450\text{V}; I_E= 0$ $T_C=125^{\circ}\text{C}$			1.0 4.0	mA
I_{CEO}	Collector Cutoff Current	$V_{CE}= 400\text{V}; I_B= 0$			5.0	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}= 5\text{V}; I_C= 0$			1.0	mA

Switching Times

t_r	Rise Time	$I_C= 6\text{A}; I_{B1}= - I_{B2}= 1.2\text{A}$			1.0	μs
t_{stg}	Storage Time				2.0	μs
t_f	Fall Time				1.0	μs

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [SPTECH manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)