

SPTECH Silicon NPN Power Transistor

2SC4131

DESCRIPTION



- Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = 50V(\text{Min})$
- Low Collector Saturation Voltage-
: $V_{CE(sat)} = 0.5V(\text{Max}) @ I_C = 5A$

APPLICATIONS

- Designed for DC-DC converter, emergency lighting inverter and general purpose applications

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	100	V
V_{CEO}	Collector-Emitter Voltage	50	V
V_{EBO}	Emitter-Base Voltage	15	V
I_C	Collector Current-Continuous	15	A
I_{CP}	Collector Current-Peak	25	A
I_B	Base Current-Continuous	4	A
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	60	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

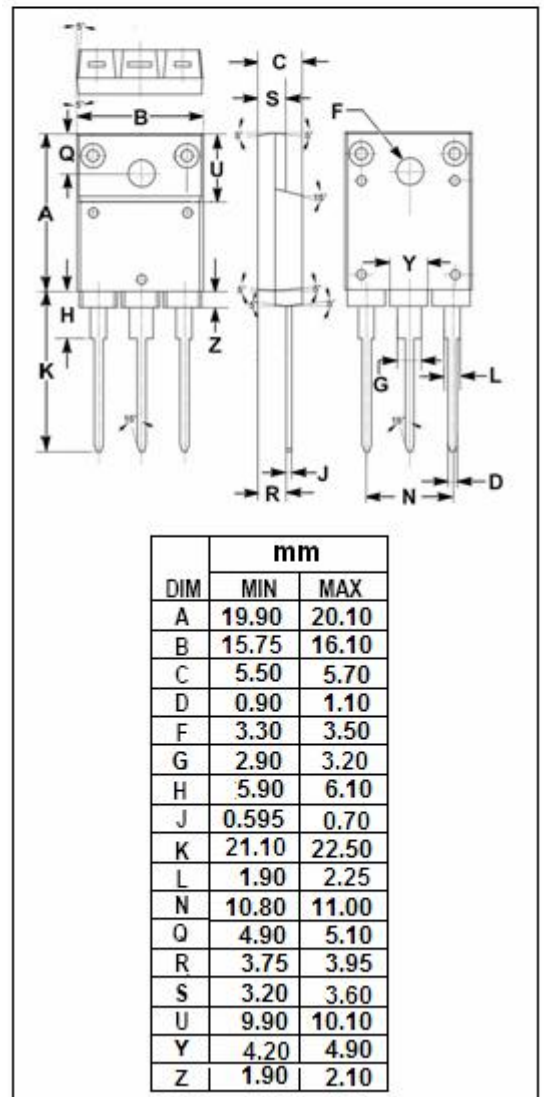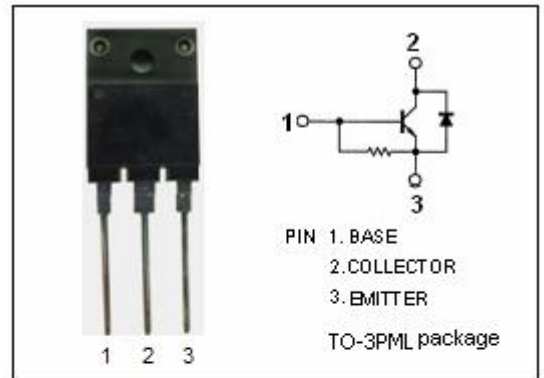

SPTECH Silicon NPN Power Transistor 2SC4131

ELECTRICAL CHARACTERISTICS

$T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C= 25\text{mA}; I_B= 0$	50			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C= 5\text{A}; I_B= 80\text{mA}$			0.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C= 5\text{A}; I_B= 80\text{mA}$			1.2	V
I_{CBO}	Collector Cutoff Current	$V_{CB}= 100\text{V}; I_E= 0$			10	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB}= 15\text{V}; I_C= 0$			10	μA
h_{FE}	DC current gain	$I_C= 5\text{A}; V_{CE}= 1\text{V}$	60		360	
f_T	Current-Gain—Bandwidth Product	$I_E= -1\text{A}; V_{CE}= 12\text{V}$		18		MHz
C_{OB}	Output Capacitance	$I_E=0; V_{CB}= 10\text{V}; f_{test}= 1.0\text{MHz}$		210		pF

Switching times

t_{on}	Turn-on Time	$I_C= 5\text{A}, I_{B1}= 80\text{mA}; I_{B2}= 80\text{mA}$ $R_L= 4\Omega; V_{CC}= 20\text{V}$		0.5		μs
t_{stg}	Storage Time			2.0		μs
t_f	Fall Time			0.4		μs

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [SPTECH manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)