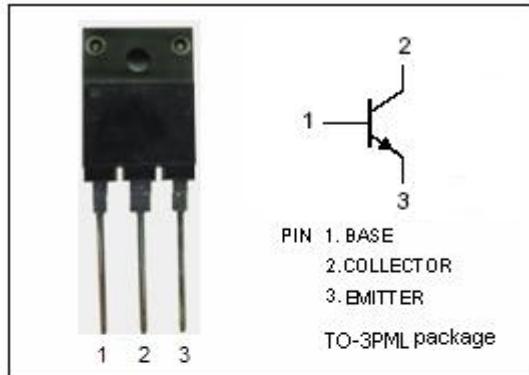


## SPTECH Silicon NPN Power Transistor

2SC5299

**DESCRIPTION**


- High Breakdown Voltage-  
:  $V_{(BR)CBO} = 1500V$ (Min)
- High Switching Speed
- High Reliability

**APPLICATIONS**

- Ultrahigh-definition CRT display horizontal deflection output applications

**ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ C$ )**

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	1500	V
$V_{CEO}$	Collector-Emitter Voltage	800	V
$V_{EBO}$	Emitter-Base Voltage	6	V
$I_c$	Collector Current-Continuous	10	A
$I_{CP}$	Collector Current-Peak	25	A
$P_c$	Collector Power Dissipation @ $T_a=25^\circ C$	3.0	W
	Collector Power Dissipation @ $T_c=25^\circ C$	70	
$T_J$	Junction Temperature	150	°C
$T_{stg}$	Storage Temperature Range	-55~150	°C

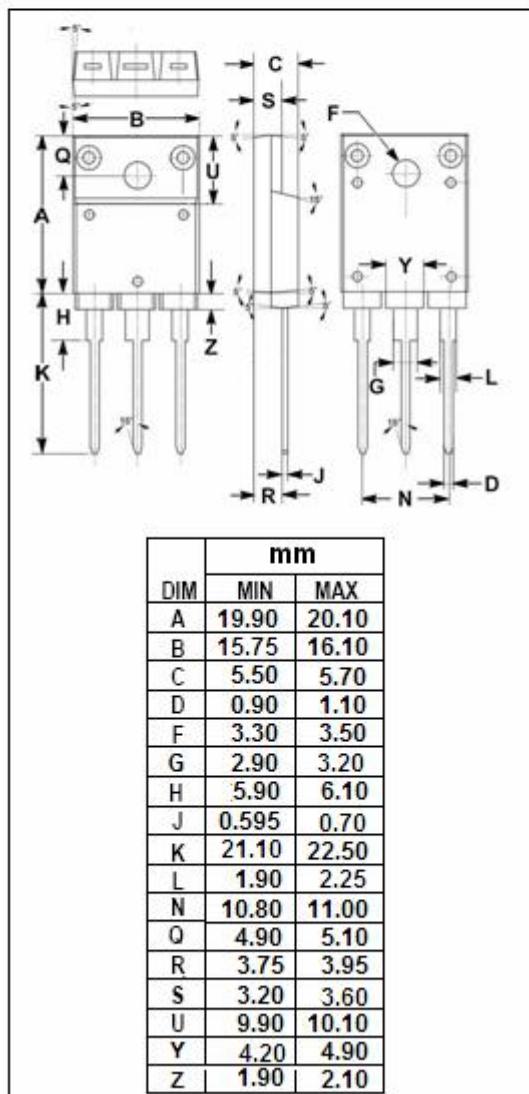

# SPTECH Product Specification

## SPTECH Silicon NPN Power Transistor

**2SC5299**

### ELECTRICAL CHARACTERISTICS

T<sub>c</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEO(sus)</sub>	Collector-Emitter Sustaining Voltage	I <sub>C</sub> = 10mA; I <sub>B</sub> = 0	800			V
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = 8A; I <sub>B</sub> = 2A			5.0	V
V <sub>BE(sat)</sub>	Base-Emitter Saturation Voltage	I <sub>C</sub> = 8A; I <sub>B</sub> = 2A			1.5	V
I <sub>CBO</sub>	Collector Cutoff Current	V <sub>CB</sub> = 800V ; I <sub>E</sub> = 0			10	µ A
I <sub>CES</sub>	Collector Cutoff Current	V <sub>CE</sub> = 1500V; R <sub>BE</sub> = 0			1.0	mA
I <sub>EBO</sub>	Emitter Cutoff Current	V <sub>EB</sub> = 4V ; I <sub>C</sub> = 0			1.0	mA
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> = 1A ; V <sub>CE</sub> = 5V	20		30	
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> = 8A ; V <sub>CE</sub> = 5V	4		7	

Switching times

t <sub>stg</sub>	Storage Time	I <sub>C</sub> = 6A , I <sub>B1</sub> = 1.2A; I <sub>B2</sub> = -2.4A R <sub>L</sub> = 50 Ω ; V <sub>CC</sub> = 200V			3.0	µ s
t <sub>r</sub>	Fall Time				0.2	µ s

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by SPTECH manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)  
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)