

R6

## Features

- Peak pulse power:
  - 5000 W (10/1000  $\mu$ s)
- Stand off voltage range from 10 V to 180 V
- Unidirectional and bidirectional diode
- Low clamping factor
- Fast response time
- UL497B, file number: QVGQ2.E136224

## Description

Transil diodes provide high overvoltage protection by clamping action. Their instantaneous response to transient overvoltages makes them particularly suited to protect voltage sensitive devices such as MOS Technology and low voltage supplied ICs.

Product status link

[BZW50](#)

# 1 Characteristics

**Table 1. Absolute maximum ratings ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )**


| Symbol    | Parameter                                                             | Value       | Unit               |
|-----------|-----------------------------------------------------------------------|-------------|--------------------|
| $P_{PP}$  | Peak pulse power dissipation <sup>(1)</sup>                           | 5000        | W                  |
| $P$       | Power dissipation on infinite heatsink                                | 6.5         | W                  |
| $I_{FSM}$ | Non repetitive surge peak forward current for unidirectional types    | 500         | A                  |
| $T_{stg}$ | Storage temperature range                                             | -65 to +175 | $^{\circ}\text{C}$ |
| $T_{op}$  | Maximum operating junction temperature                                | 175         | $^{\circ}\text{C}$ |
| $T_L$     | Maximum lead temperature for soldering during 10 s at 5 mm from case. | 260         | $^{\circ}\text{C}$ |

1. For a surge greater than the maximum values, the diode will fail in short-circuit.


**Table 2. Thermal resistance parameter**

| Symbol        | Parameter                                                         | Value | Unit                        |
|---------------|-------------------------------------------------------------------|-------|-----------------------------|
| $R_{th(j-l)}$ | Junction to leads                                                 | 15    | $^{\circ}\text{C}/\text{W}$ |
| $R_{th(j-a)}$ | Junction to ambient on printed circuit. $L_{lead} = 10\text{ mm}$ | 65    | $^{\circ}\text{C}/\text{W}$ |

**Figure 1. Electrical characteristics (definitions)**

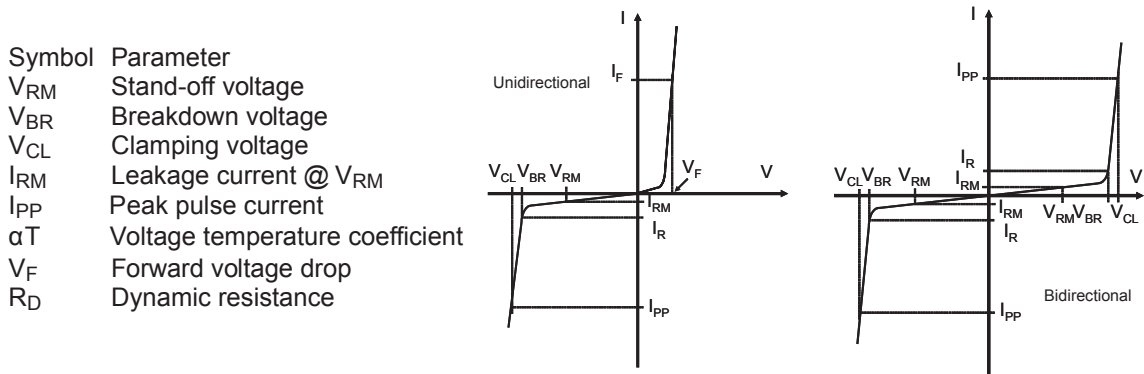

**Figure 2. Pulse definition for electrical characteristics**

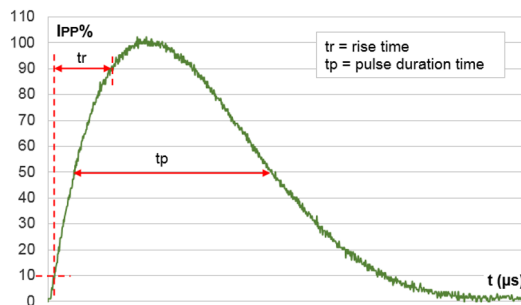


**Table 3. Electrical characteristics - values ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )**

| Order code     |               | $I_{RM}$ @ $V_{RM}$ max. |     | $V_{BR}$ @ $I_R^{(1)}$ min. |    | $V_{CL}$ @ $I_{PP}$ 10/1000 $\mu\text{s}$ max. |      | $V_{CL}$ @ $I_{PP}$ 8/20 $\mu\text{s}$ max. |      | $\alpha T^{(2)}$           | $C^{(3)}$ typ. |
|----------------|---------------|--------------------------|-----|-----------------------------|----|------------------------------------------------|------|---------------------------------------------|------|----------------------------|----------------|
| Unidirectional | Bidirectional | $\mu\text{A}$            | V   | V                           | mA | V                                              | A    | V                                           | A    | $10^{-4}/^{\circ}\text{C}$ | pF             |
| BZW50-10       | BZW50-10B     | 5                        | 10  | 11.1                        | 1  | 18.8                                           | 266  | 23.4                                        | 2564 | 7.8                        | 24000          |
| BZW50-12       | BZW50-12B     | 5                        | 12  | 13.3                        | 1  | 22                                             | 227  | 28                                          | 2143 | 8.4                        | 18500          |
| BZW50-15       | BZW50-15B     | 5                        | 15  | 16.6                        | 1  | 26.9                                           | 186  | 35                                          | 1714 | 8.8                        | 13500          |
| BZW50-18       | BZW50-18B     | 5                        | 18  | 20                          | 1  | 32.2                                           | 155  | 41.5                                        | 1446 | 9.2                        | 11500          |
| BZW50-22       | BZW50-22B     | 5                        | 22  | 24.4                        | 1  | 39.4                                           | 127  | 51                                          | 1177 | 9.6                        | 8500           |
| BZW50-27       | BZW50-27B     | 5                        | 27  | 30                          | 1  | 48.3                                           | 103  | 62                                          | 968  | 9.8                        | 7000           |
| BZW50-33       | BZW50-33B     | 5                        | 33  | 36.6                        | 1  | 59                                             | 85   | 76                                          | 789  | 10                         | 5750           |
| BZW50-39       | BZW50-39B     | 5                        | 39  | 43.3                        | 1  | 69.4                                           | 72   | 90                                          | 667  | 10.1                       | 4800           |
| BZW50-47       | BZW50-47B     | 5                        | 47  | 52                          | 1  | 83.2                                           | 60.1 | 108                                         | 556  | 10.3                       | 4100           |
| BZW50-56       | BZW50-56B     | 5                        | 56  | 62.2                        | 1  | 99.6                                           | 50   | 129                                         | 465  | 10.4                       | 3400           |
| BZW50-68       | BZW50-68B     | 5                        | 68  | 75.6                        | 1  | 121                                            | 41   | 157                                         | 382  | 10.5                       | 3000           |
| BZW50-82       | BZW50-82B     | 5                        | 82  | 91                          | 1  | 145                                            | 34   | 189                                         | 317  | 10.6                       | 2600           |
| BZW50-100      | BZW50-100B    | 5                        | 100 | 111                         | 1  | 179                                            | 28   | 228                                         | 263  | 10.7                       | 2300           |
| BZW50-120      | BZW50-120B    | 5                        | 120 | 133                         | 1  | 215                                            | 23   | 274                                         | 219  | 10.8                       | 1900           |
| BZW50-150      | BZW50-150B    | 5                        | 150 | 166                         | 1  | 269                                            | 19   | 343                                         | 175  | 10.8                       | 1700           |
| BZW50-180      | BZW50-180B    | 5                        | 180 | 200                         | 1  | 322                                            | 16   | 410                                         | 146  | 10.8                       | 1500           |


1. Pulse test:  $t_p < 50\text{ ms}$ .
2. To calculate  $V_{BR}$  versus  $T_j$ :  $V_{BR}$  at  $T_j = V_{BR}$  at  $25\text{ }^{\circ}\text{C} \times (1 + \alpha T \times (T_j - 25))$
3.  $V_R = 0\text{ V}$ ,  $F = 1\text{ MHz}$ . For bidirectional types, capacitance value is divided by 2.

## 1.1 Characteristics (curves)


**Figure 3. Peak power dissipation vs. initial junction temperature (printed circuit board)**

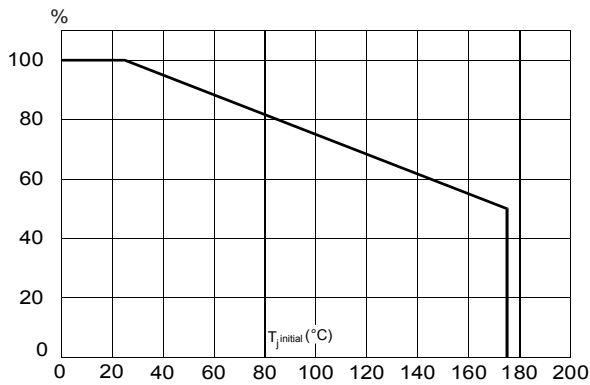


**Figure 4. Peak pulse power versus exponential pulse duration**

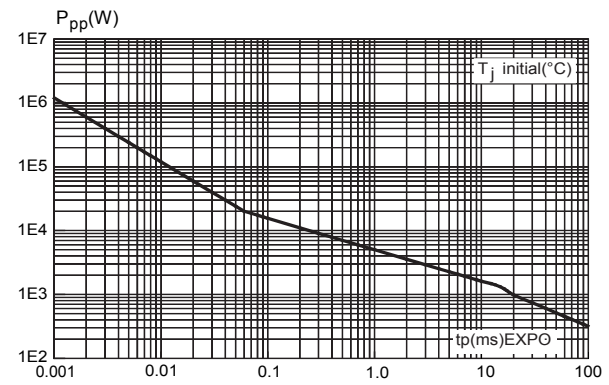



**Figure 5. Clamping voltage vs. peak pulse current**

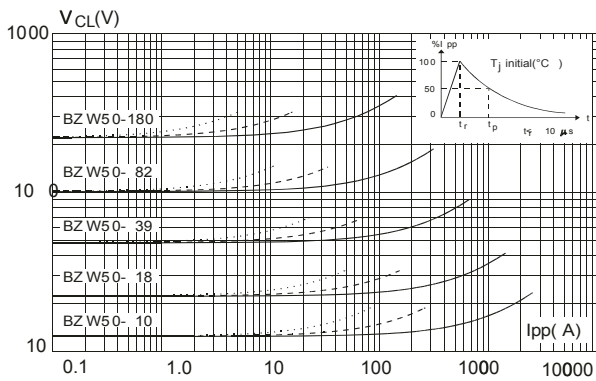



**Figure 6. Capacitance vs. reverse applied voltage for unidirectional types (typical values)**

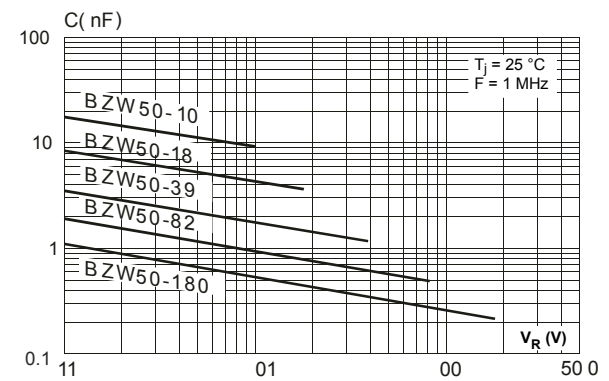

**Note:** The curves in [Figure 5. Clamping voltage vs. peak pulse current](#) are specified for a junction temperature of 25 °C before surge. The given results may be extrapolated for other junction temperatures by using the following formula:  $\Delta V_{BR} = \alpha T \times [T_{amb} - 25] \times V_{BR}(25\text{ }^{\circ}\text{C})$ . For intermediate voltages, extrapolate the given results.

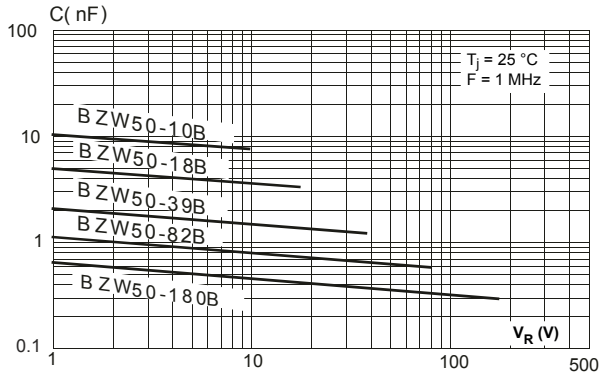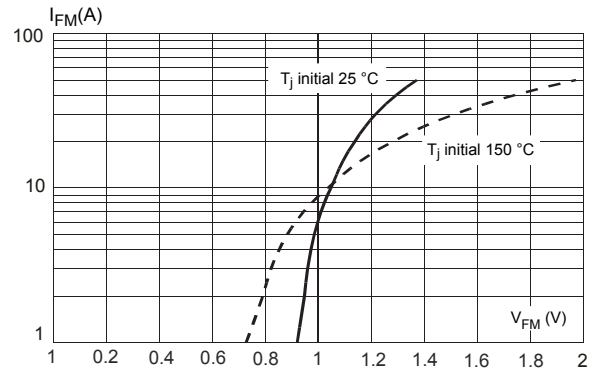**Figure 7. Capacitance vs. reverse applied voltage for bidirectional types (typical values)**

**Figure 8. Peak forward voltage drop vs. peak forward current for unidirectional types (typical value)**

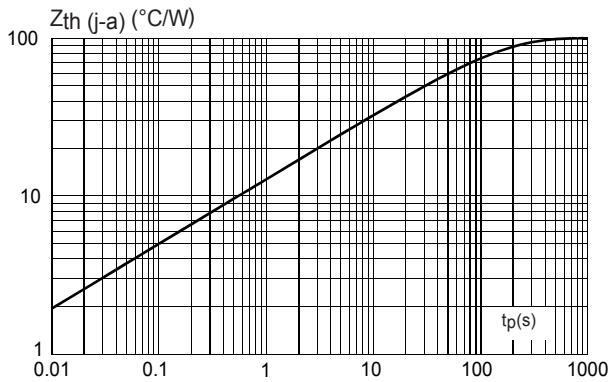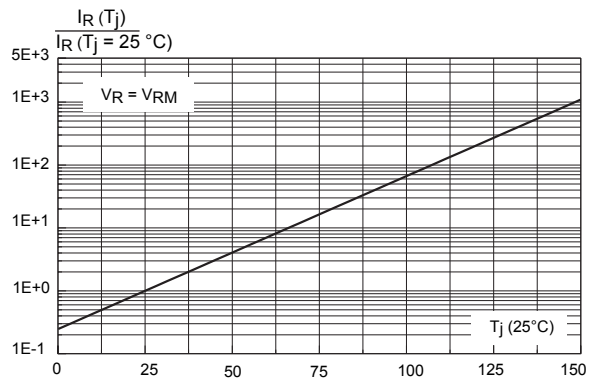
Note: For Figure 8. Peak forward voltage drop vs. peak forward current for unidirectional types (typical value), multiply by 2 for units with  $V_{BR} > 220$  V.

**Figure 9. Transient thermal impedance junction to ambient vs. pulse duration**

**Figure 10. Relative variation of leakage current vs. junction temperature**


## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

### 2.1 R6 package information

Figure 11. R6 package outline

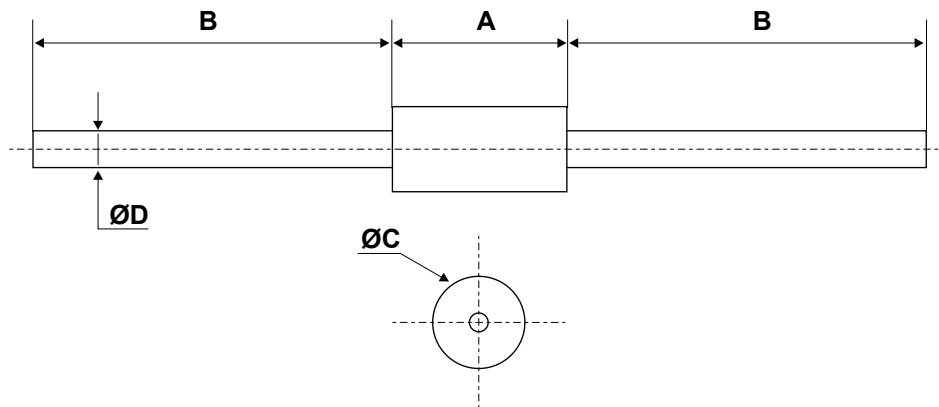


Table 4. R6 package mechanical data


| Ref. | Dimensions  |      |      |        |      |       |
|------|-------------|------|------|--------|------|-------|
|      | Millimeters |      |      | Inches |      |       |
|      | Min.        | Typ. | Max. |        | Typ. | Max.  |
| A    | 8.6         | -    | 9.1  | 0.338  | -    | 0.358 |
| B    | 25.4        | -    |      | 1      | -    |       |
| C    | 8.6         | -    | 9.1  | 0.338  | -    | 0.358 |
| D    | 1.20        | -    | 1.30 | 0.047  | -    | 0.051 |

**Table 5. Marking**

| Unidirectional order code | Marking   | Bidirectional order code | Marking    |
|---------------------------|-----------|--------------------------|------------|
| BZW50-10                  | BZW50-10  | BZW50-10B                | BZW50-10B  |
| BZW50-12                  | BZW50-12  | BZW50-12B                | BZW50-12B  |
| BZW50-15                  | BZW50-15  | BZW50-15B                | BZW50-15B  |
| BZW50-18                  | BZW50-18  | BZW50-18B                | BZW50-18B  |
| BZW50-22                  | BZW50-22  | BZW50-22B                | BZW50-22B  |
| BZW50-27                  | BZW50-27  | BZW50-27B                | BZW50-27B  |
| BZW50-33                  | BZW50-33  | BZW50-33B                | BZW50-33B  |
| BZW50-39                  | BZW50-39  | BZW50-39B                | BZW50-39B  |
| BZW50-47                  | BZW50-47  | BZW50-47B                | BZW50-47B  |
| BZW50-56                  | BZW50-56  | BZW50-56B                | BZW50-56B  |
| BZW50-68                  | BZW50-68  | BZW50-68B                | BZW50-68B  |
| BZW50-82                  | BZW50-82  | BZW50-82B                | BZW50-82B  |
| BZW50-100                 | BZW50-100 | BZW50-100B               | BZW50-100B |
| BZW50-120                 | BZW50-120 | BZW50-120B               | BZW50-120B |
| BZW50-150                 | BZW50-150 | BZW50-150B               | BZW50-150B |
| BZW50-180                 | BZW50-180 | BZW50-180B               | BZW50-180B |

### 3 Ordering information

**Figure 12. Ordering information scheme**

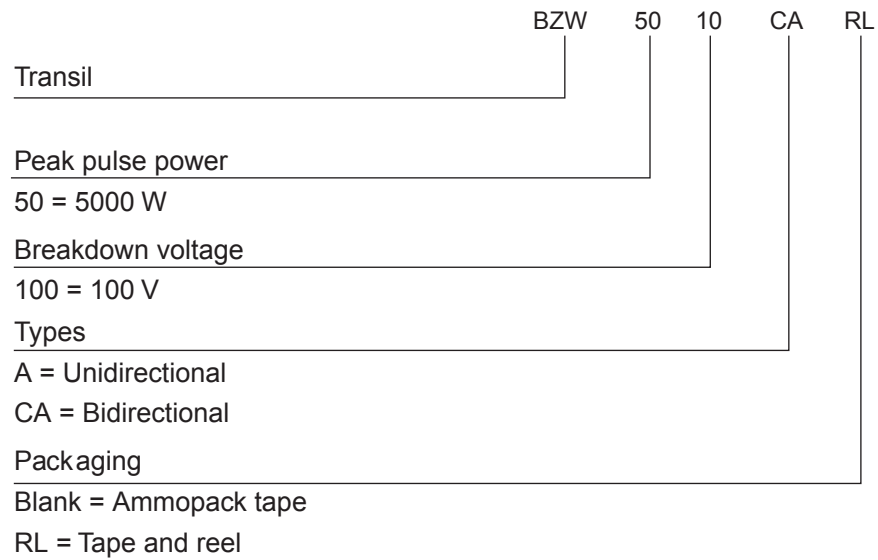

**Table 6. Ordering information**

| Order code   | Marking                              | Package | Weight  | Base qty. | Delivery mode |
|--------------|--------------------------------------|---------|---------|-----------|---------------|
| BZW50xxxx    | See <a href="#">Table 5. Marking</a> | R6      | 2.050 g | 1000      | Ammopack      |
| BZW50xxxxB   |                                      |         |         | 100       | Tape and reel |
| BZW50xxxxRL  |                                      |         |         |           |               |
| BZW50xxxxBRL |                                      |         |         |           |               |

1. Logo, date code, type code, cathode band (for unidirectional types only).



## Revision history

**Table 7. Document revision history**

| Date        | Revision | Changes                                                                                                                                                                   |
|-------------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Feb-2003    | 1        | Last update.                                                                                                                                                              |
| 14-Dec-2012 | 2        | Updated ECOPACK statement.                                                                                                                                                |
| 25-May-2018 | 3        | Updated title description. Updated <a href="#">Figure 2. Pulse definition for electrical characteristics</a> and <a href="#">Figure 12. Ordering information scheme</a> . |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [STMicroelectronics](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#)  
[P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#)  
[ESD119B1W01005E6327XTSA1](#) [ESD5V0J4-TP](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#)  
[3.0SMCJ33CA-F](#) [3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#)  
[SCM1293A-04SO](#) [ESD200-B1-CSP0201 E6327](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#)  
[82350120560](#) [82356240030](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#)  
[CPDQC5V0-HF](#) [D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#)