


## Low clamping single line unidirectional ESD



ST0201 package



### Features

- Low clamping voltage:
  - -3 V / +9 V (IEC 61000-4-2 contact discharge at 30 ns)
- Unidirectional diode
- Low leakage current
- ST0201 package
- Complies with the following standards: IEC 61000-4-2 level 4 (exceeds level 4)
  - $\pm 30$  kV (air discharge)
  - $\pm 30$  kV (contact discharge)

### Application

Where transient over voltage protection in ESD sensitive equipment is required, such as:

- Smartphones, mobile phones and accessories
- Tablet, PC, netbooks and notebooks
- Portable multimedia devices and accessories
- Digital cameras and camcorders
- Communication and highly integrated systems

### Description

The [ESD051-1F4](#) is a unidirectional single line TVS diode designed to protect the power line against EOS and ESD transients.

The device is ideal for applications where board space saving is required.


Product status link

[ESD051-1F4](#)

# 1 Characteristics

**Table 1. Absolute maximum ratings ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )**

Symbol	Parameter		Value	Unit
$V_{pp}$	Peak pulse voltage	IEC 61000-4-2 contact discharge	$\pm 30$	kV
		IEC 61000-4-2 air discharge	$\pm 30$	
$P_{pp}$	Peak pulse power (8/20 $\mu\text{s}$ )		110	W
$I_{pp}$	Peak pulse current (8/20 $\mu\text{s}$ )		11	A
$T_{op}$	Operating junction temperature range		-55 to 150	$^{\circ}\text{C}$
$T_{stg}$	Storage junction temperature range		-65 to 150	
$T_L$	Maximum lead temperature for soldering during 10 s		260	

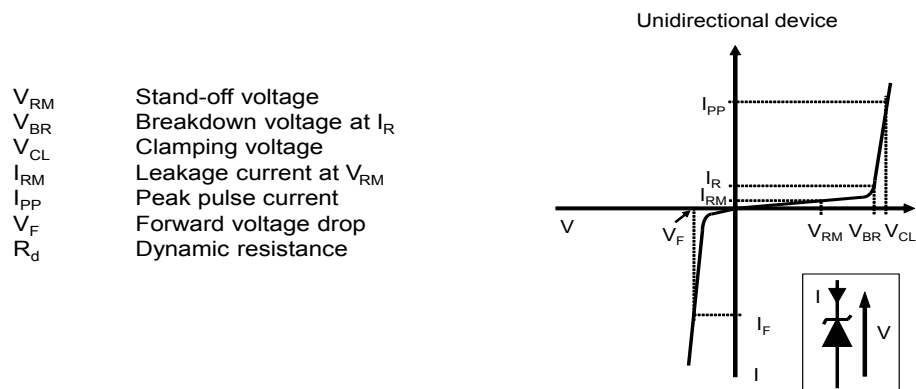
**Figure 1. Electrical characteristics (definitions)**

**Table 2. Electrical characteristics (values) ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )**

Symbol	Parameter	Test condition	Min.	Typ.	Max.	Unit
$V_{RM}$	Reverse working voltage				5.5	V
$V_{BR}$	Breakdown voltage	$I_R = 1\text{ mA}$	5.8			V
$I_{RM}$	Leakage current	$V_{RM} = 5.5\text{ V}$			100	nA
$V_{CL}$	Clamping voltage	IEC 61000-4-2, +8 kV contact measured at 30 ns		9.0		V
		IEC 61000-4-2, -8 kV contact measured at 30 ns		-3.0		
$R_D$	Dynamic resistance, pulse duration 100 ns (1)	Direct		0.17		$\Omega$
		Forward		0.14		$\Omega$
$C_{LINE}$	Line capacitance	$V_{LINE} = 0\text{ V}$ , $F = 1\text{ MHz}$ , $V_{OSC} = 30\text{ mV}$		110		pF


1. More information are available in ST application note: AN4022

## 1.1 Characteristics (curves)

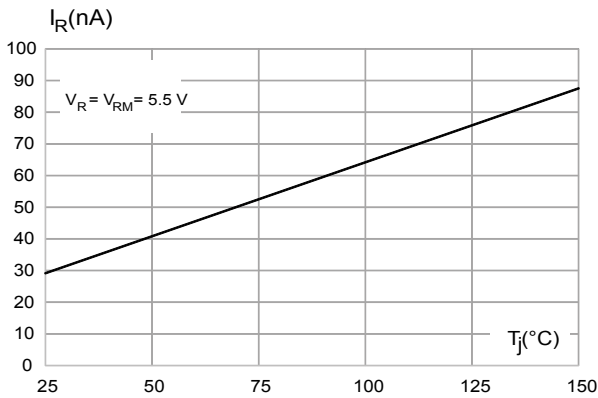
**Figure 2. Variation of leakage current versus junction temperature**




**Figure 3. Junction capacitance versus frequency**

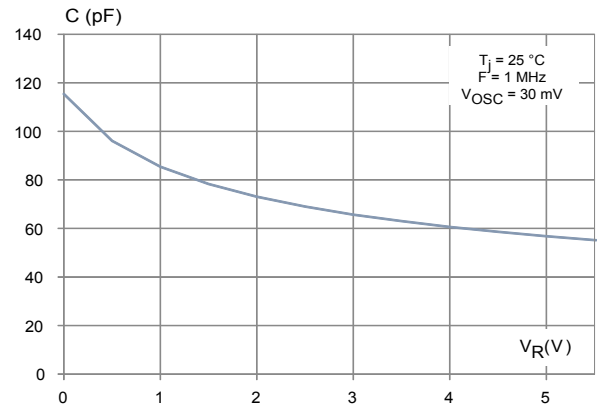


**Figure 4. ESD response to IEC 61000-4-2 (+8 kV contact discharge)**

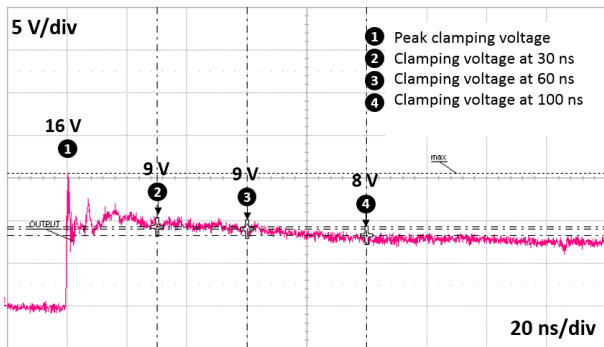


**Figure 5. ESD response to IEC 61000-4-2 (-8 kV contact discharge)**

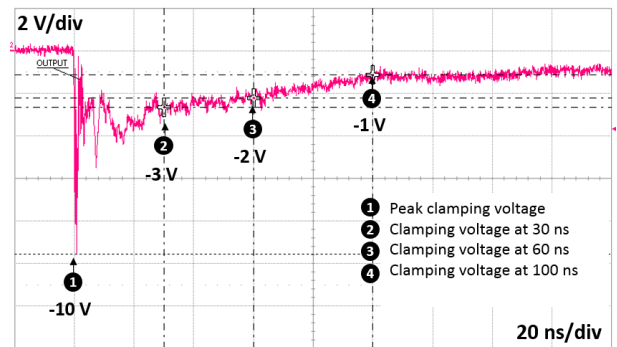

**Figure 6. TLP**

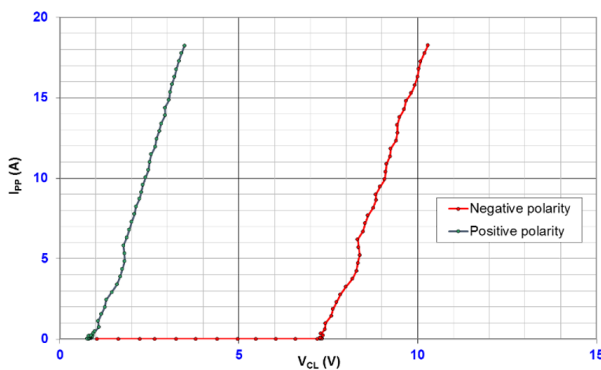

**Figure 7. S21 attenuation**

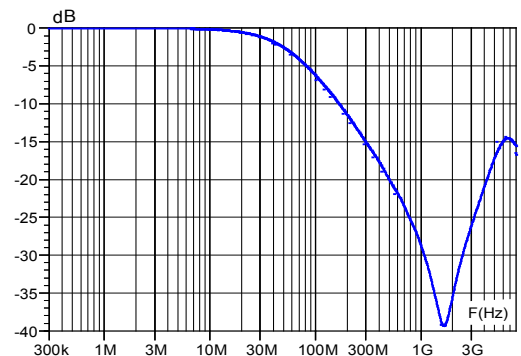

## 2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

### 2.1 ST0201 package information

Figure 8. ST0201 package outline


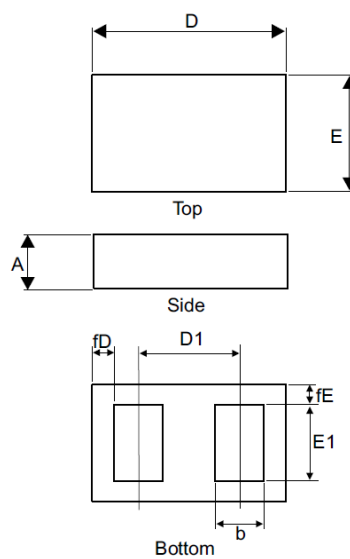


Table 3. ST0201 package mechanical data


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.280	0.300	0.320	0.011	0.0118	0.0126
b	0.125	0.140	0.155	0.0049	0.0055	0.0061
D	0.560	0.580	0.600	0.0220	0.0228	0.0236
D1		0.350			0.0138	
E	0.260	0.280	0.300	0.0102	0.0110	0.0119
E1	0.175	0.190	0.205	0.0069	0.0075	0.0081
fD	0.030	0.045	0.060	0.0011	0.0017	0.0024
fE	0.030	0.045	0.060	0.0011	0.0017	0.0024

Figure 9. Marking

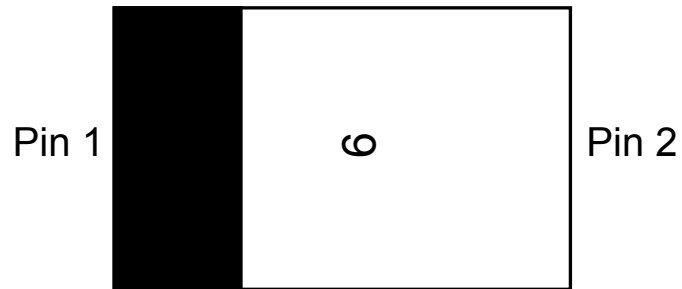


Note: Marking can be rotated by 90° or 180° to differentiate assembly location.

Figure 10. Tape and reel specification

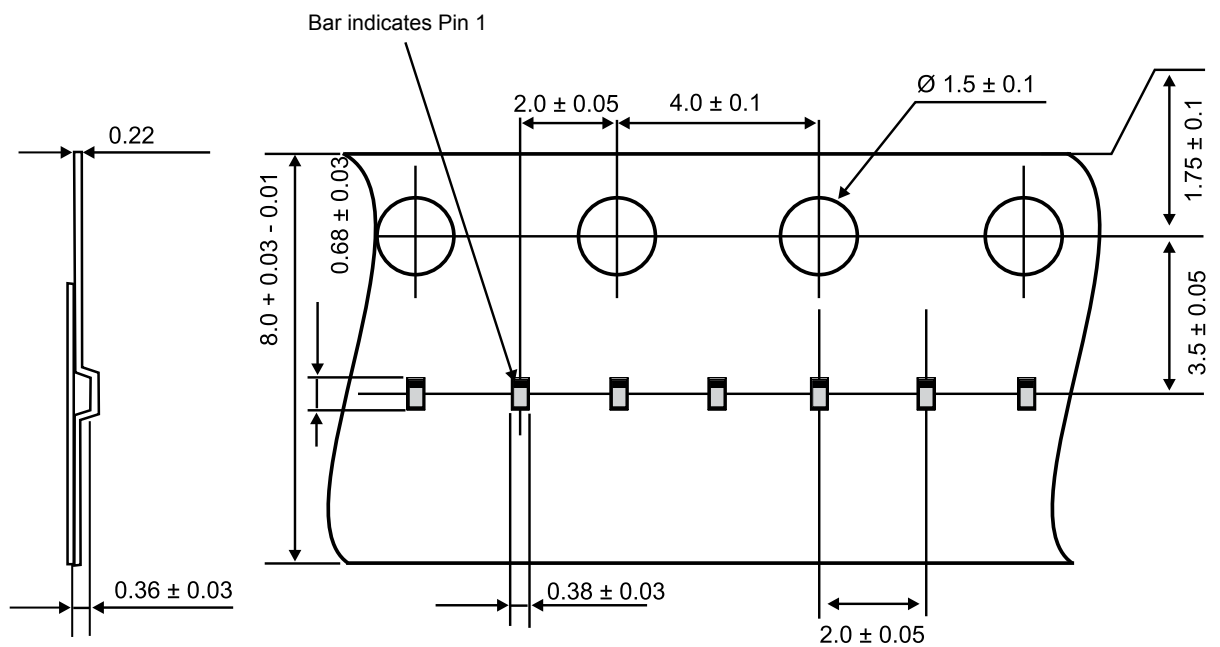

### 3 Recommendation on PCB assembly


#### 3.1 Footprint

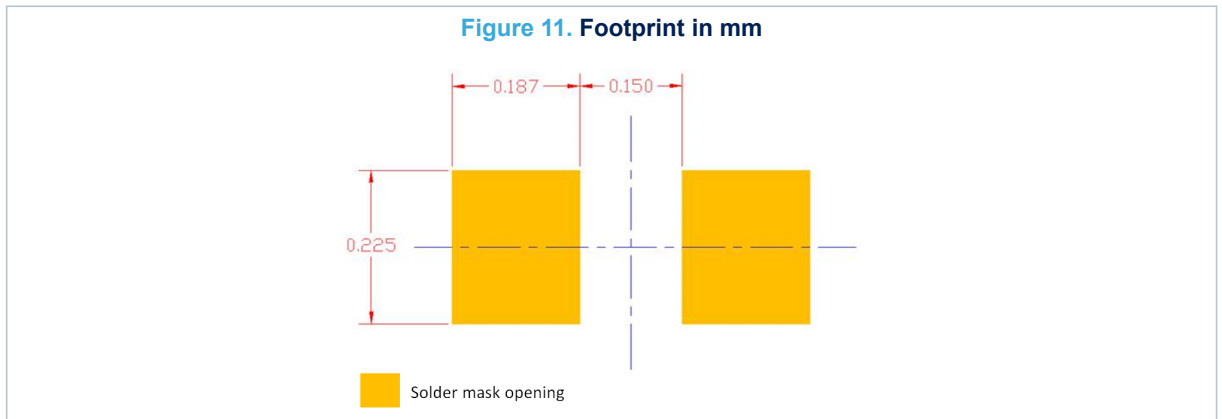

#### 3.2 Stencil opening design

1. Recommended design reference
  - a. Stencil opening dimensions: 75  $\mu\text{m}$

**Figure 12. Stencil opening recommendations**

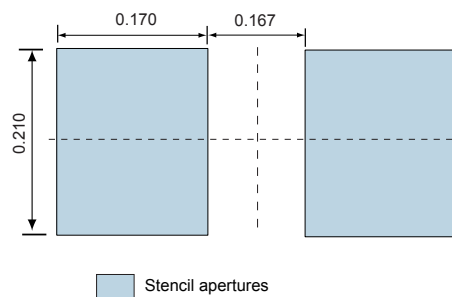

### 3.3 Solder paste

1. Halide-free flux qualification ROL0 according to ANSI/J-STD-004.
2. “No clean” solder paste is recommended.
3. Offers a high tack force to resist component movement during high speed.
4. Use solder paste with fine particles: powder particle size 20-38  $\mu\text{m}$ .

### 3.4 Placement


1. Manual positioning is not recommended.
2. It is recommended to use the lead recognition capabilities of the placement system, not the outline centering
3. Standard tolerance of  $\pm 0.05$  mm is recommended.
4. 1.0 N placement force is recommended. Too much placement force can lead to squeezed out solder paste and cause solder joints to short. Too low placement force can lead to insufficient contact between package and solder paste that could cause open solder joints or badly centered packages.
5. To improve the package placement accuracy, a bottom side optical control should be performed with a high resolution tool.
6. For assembly, a perfect supporting of the PCB (all the more on flexible PCB) is recommended during solder paste printing, pick and place and reflow soldering by using optimized tools.

### 3.5 PCB design preference

1. To control the solder paste amount, the closed via is recommended instead of open vias.
2. The position of tracks and open vias in the solder area should be well balanced. A symmetrical layout is recommended, to avoid any tilt phenomena caused by asymmetrical solder paste due to solder flow away.

### 3.6 Reflow profile


**Figure 13. ST ECOPACK<sup>®</sup> recommended soldering reflow profile for PCB mounting**

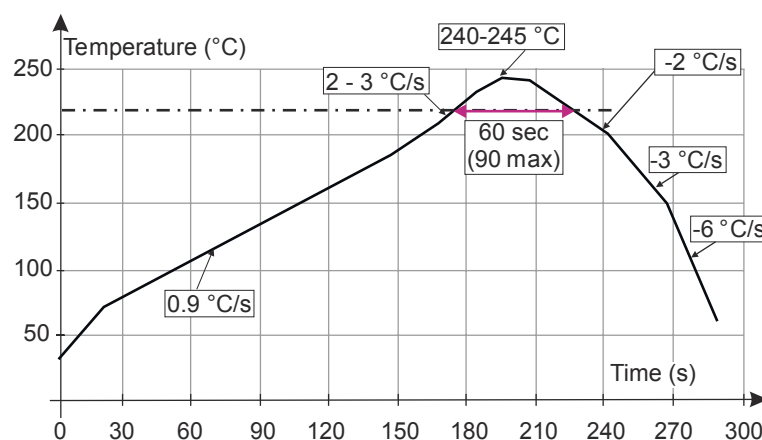

**Note:** Minimize air convection currents in the reflow oven to avoid component movement. Maximum soldering profile corresponds to the latest IPC/JEDEC J-STD-020.

## 4 Ordering information

**Figure 14. Ordering information scheme**

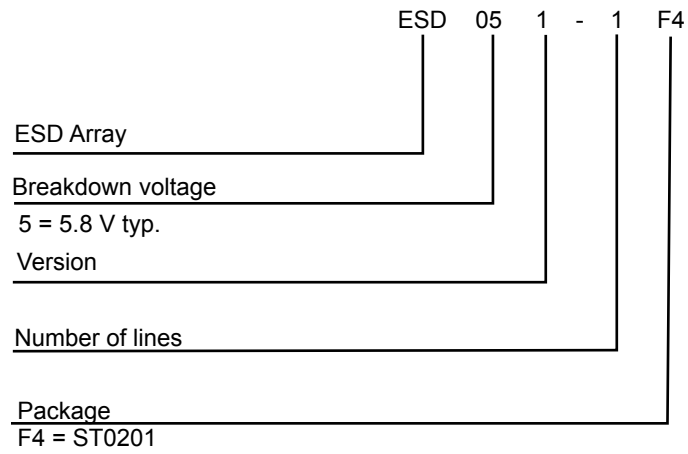

**Table 4. Ordering information**

Order code	Marking	Weight	Base qty.	Delivery mode
ESD051-1F4	6	0.12 mg	15000	Tape and reel



## Revision history

**Table 5. Document revision history**

Date	Revision	Changes
11-Jun-2018	1	First issue.
02-Jul-2018	2	Updated <a href="#">Table 3. ST0201 package mechanical data.</a>

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [ESD Suppressors / TVS Diodes](#) category:*

*Click to view products by [STMicroelectronics](#) manufacturer:*

Other Similar products are found below :

[60KS200C](#) [D12V0H1U2WS-7](#) [D18V0L1B2LP-7B](#) [82356050220](#) [D5V0M5U6V-7](#) [NTE4902](#) [P4KE27CA](#) [P6KE11CA](#) [P6KE39CA-TP](#)  
[P6KE8.2A](#) [SA110CA](#) [SA60CA](#) [SA64CA](#) [SMBJ12CATR](#) [SMBJ8.0A](#) [SMLJ30CA-TP](#) [ESD101-B1-02ELS E6327](#) [ESD112-B1-02EL E6327](#)  
[ESD119B1W01005E6327XTSA1](#) [ESD5V0L1B02VH6327XTSA1](#) [ESD7451N2T5G](#) [19180-510](#) [CPDT-5V0USP-HF](#) [3.0SMCJ33CA-F](#)  
[3.0SMCJ36A-F](#) [HSPC16701B02TP](#) [D3V3Q1B2DLP3-7](#) [D55V0M1B2WS-7](#) [DESD5V0U1BL-7B](#) [DRTR5V0U4SL-7](#) [SCM1293A-04SO](#)  
[ESD200-B1-CSP0201 E6327](#) [ESD203-B1-02EL E6327](#) [SM12-7](#) [SMF8.0A-TP](#) [SMLJ45CA-TP](#) [CEN955 W/DATA](#) [82350120560](#)  
[82356240030](#) [VESD12A1A-HD1-GS08](#) [CPDUR5V0R-HF](#) [CPDUR24V-HF](#) [CPDQC5V0U-HF](#) [CPDQC5V0USP-HF](#) [CPDQC5V0-HF](#)  
[D1213A-01LP4-7B](#) [D1213A-02WL-7](#) [ESDLIN1524BJ-HQ](#) [5KP100A](#) [5KP15A](#)