

POTTING BOXES

300 Series Multi-Purpose Boxes


An economic range of multi-purpose flame retardant ABS enclosures with deep-profile lid.

- Moulded in UL94-V0 ABS
- Lid mounted by 4x self-tapping screws (smallest & largest sizes snap-fit)
- PCB pillars in base



| SPECIFICATION | |
|------------------------|-------------------------------------------------------------|
| Materials | Lid & base ABS, UL94-V0 |
| Operating temperature | Resistant to temperatures up to 85°C |
| Standard colours | Light grey similar to RAL 7035 Black similar to RAL 5004 |
| Standard unit includes | Lid & base |


| BLACK | GREY | LENGTH | WIDTH | HEIGHT | SNAP FIT |
|-------------|-------------|--------|-------|--------|----------|
| BE300-5030B | BE300-5030G | 50mm | 50mm | 30mm | • |
| BE300-5025B | BE300-5025G | 100mm | 50mm | 25mm | |
| BE300-5040B | BE300-5040G | 100mm | 50mm | 40mm | |
| BE300-6540B | BE300-6540G | 120mm | 65mm | 40mm | |
| BE300-6565B | BE300-6565G | 120mm | 65mm | 66mm | |
| BE300-1145B | BE300-1145G | 185mm | 110mm | 45mm | • |

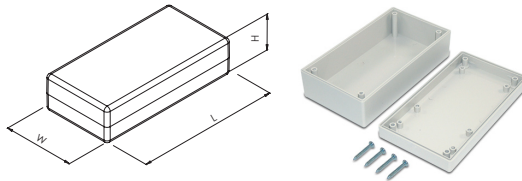

100 Series Open Potting Boxes


Comprehensive range of open top potting boxes. Maximum protection against shock, chemicals, moisture and temperature.

- Encapsulate and protect electronic components
- Moulded in ABS
- Highly resistant to most chemicals
- High rigidity and impact strength
- Compliant with water absorption specifications to DIN53495

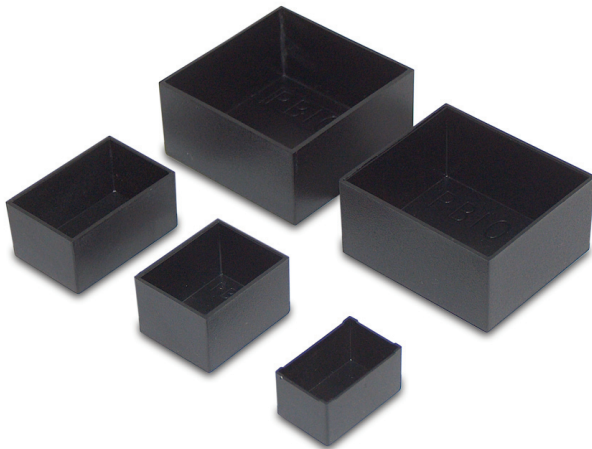

| SPECIFICATION | |
|------------------------|--------------------------------|
| Materials | ABS, UL94-V0 to order |
| Operating temperature | -20°C to +94°C |
| Standard colours | Black |
| Standard unit includes | Box Supplied in packs of 10 |

| BLACK | LENGTH | WIDTH | HEIGHT | WALL THICKNESS |
|------------|--------|-------|--------|----------------|
| RTM101-BLK | 25mm | 20mm | 15mm | 1mm |
| RTM102-BLK | 30mm | 20mm | 15mm | 1mm |
| RTM103-BLK | 40mm | 35mm | 20mm | 1mm |
| RTM104-BLK | 50mm | 40mm | 30mm | 1mm |
| RTM105-BLK | 75mm | 50mm | 35mm | 1.4mm |
| RTM106-BLK | 100mm | 60mm | 25mm | 1.5mm |
| RTM107-BLK | 40mm | 40mm | 20mm | 1mm |
| RTM108-BLK | 50mm | 50mm | 30mm | 1mm |
| RTM109-BLK | 11mm | 11mm | 9mm | 0.5mm |
| RTM110-BLK | 22mm | 14mm | 9mm | 0.5mm |
| RTM111-BLK | 30mm | 30mm | 20mm | 1mm |
| RTM112-BLK | 25mm | 25mm | 25mm | 1mm |
| RTM113-BLK | 40mm | 40mm | 30mm | 1mm |
| RTM114-BLK | 75mm | 75mm | 40mm | 1mm |
| RTM115-BLK | 89mm | 64mm | 33mm | 1.5mm |
| RTM116-BLK | 100mm | 50mm | 25mm | 1.3mm |

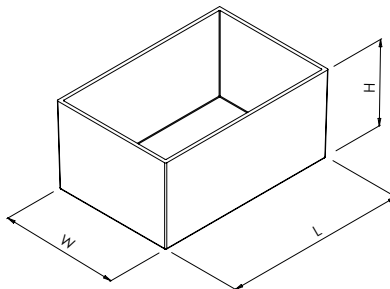

UNIVERSAL ENCLOSURES

HAND HELD CASES

HEAVY DUTY ENCLOSURES

DIN RAIL BOXES

INTERFACE SUPPORTS

CONTROL STATIONS

DIECAST & METAL BOXES

DESKTOP & INSTRUMENT CASES

POTTING BOXES

19" ENCLOSURES

19" CABINETS

DEVELOPMENT BOARD ENCLOSURES

CUSTOM SIZED ENCLOSURES

CUSTOM SERVICES

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Enclosures, Boxes, & Cases](#) *category:*

Click to view products by [Camden](#) *manufacturer:*

Other Similar products are found below :

[CR-425 PAINTED](#) [585-R-WH-PK](#) [M-10-PLATED](#) [60221-01](#) [60566-01-000](#) [HPL-9VB BATT DOOR](#) [M-16-LID-PLATED](#) [M18-PLTD](#) [M-21-LID-PLATED](#) [M-21-PLATED](#) [M-23-PLATED](#) [CU-281-MB](#) [6711GSKT](#) [71884-29-028](#) [LH45-100 Black](#) [7200B](#) [72868-510-000](#) [CNS-0000 Black](#) [72883-510-000](#) [CNS-0101 Black](#) [72906-510-000](#) [CNS-0407 Black](#) [73091-510-000](#) [CNM-0000-BLACK Kit](#) [73092-510-000](#) [CNM-0101 Black](#) [73108-510-000](#) [CNL-0303 Black](#) [73395-510-039](#) [CNS-0006 Bone](#) [74257-510-000](#) [CNL-0004](#) [MDC-1183-PLAIN-ALUM](#) [MDC-1183-PTD](#) [MDC-13104-PLAIN-ALUM](#) [MDC-211 - PAINTED IVORY/BEIGE](#) [MDC-321-PTD](#) [MDC-432-PLAIN-ALUM](#) [MDC-973-PTD](#) [76](#) [77153-01-028](#) [FLX6030](#) [83535-01-508](#) [PS-11296-G](#) [PS-11298-B](#) [116-508](#) [120-407](#) [120-412](#) [120-909](#) [120-455](#) [R272-100-000](#) [120-910](#) [R501-001-010](#) [R508-080-000](#) [R508-160-000](#) [R530-120-000](#) [R530-122-000](#) [R530-200-000](#) [R531-160-000](#) [R531-200-000](#) [R582-080-100](#)