


## SPC574S-DISP – Discovery Board

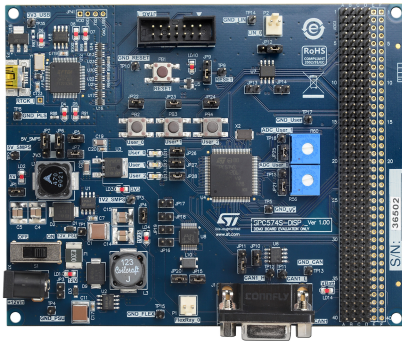

### Features

- Featuring SPC574S60E3, a 32-bit power architecture microcontroller with dual core e200z4d, 1.5 MB flash, e TQFP100 pins
- 1 CAN FD port (DB9 connector)
- 1 FlexRay, 1 line port (with transceiver)
- PLS integrated programmer - debugger
- JTAG interface: (standard 7 x 2 male, 0.1")
- 1 USB virtual COM Port
- 3 push buttons, 3 LEDs for user purposes, reset push button
- 2 potentiometers for ADC quick evaluation
- All GPIOs and signals accessible by a 4 x 40, 0.1" pin grid array allowing connection of an additional boards
- Board supply: 12 VDC (external power supply)
- Board size 132 mm x 105 mm

### Description

The SPC574S-DISP is the ideal discovery board for accelerating the development and securing a fast time-to-market, with a perfect balance among performance, functionalities and cost.

Featuring SPC57 4S Line, it addresses a wide range of automotive applications such as brushless DC electric motors.

SPC57 4S Line is designed to meet ASIL-D highest functional safety level, in compliance with ISO26262. The SPC574S-DISP provides full access to all CPU's signals and GPIO's, and exposes a wide set of connectivity options, such as CAN-FD, FlexRay, LIN, UART.

It offers easy debug both with a JTAG port and the on-board PLS debugger-programmer. PLS Universal Debug Engine Software is available for free download at this link ([www.st.com/spc5-udestk-sw](http://www.st.com/spc5-udestk-sw)) and includes a full feature code size limited evaluation license. Additional SW license are available at this link ([www.st.com/spc5-udedebg](http://www.st.com/spc5-udedebg)). It also includes extension headers (4 x 40 pins) to connect prototyping boards or additional modules, as well as push switches and LEDs for HMI customization. Power supply (EU plug) in the box for immediate plug and play.

ST's SPC5 Studio, an Eclipse-based Integrated Development Environment (IDE), providing a comprehensive framework to design, build and deploy your own embedded application SPC5 Studio is available for free download ([www.st.com/spc5studio](http://www.st.com/spc5studio)) and includes multiple free application firmware examples ready for use. Learn more and share your experience joining ST Community at [https://community.st.com/SPC5 Automotive MCUs](https://community.st.com/SPC5%20Automotive%20MCUs).

#### Product status link

[SPC574S-DISP](#)

#### Product summary

<b>Order code</b>	SPC574S-DISP
<b>Reference</b>	SPC57 4S Line Discovery with SPC574S60E3

## **1 System requirements**

---

- Windows PC
- USB cable Type-A to mini-B
- PSU: 12 V, 2 A (100 - 240 Vac, EU Plug)

## 2 Development toolchain

---

- SPC5 Studio

### **3 Demonstration software**

---

Demonstration software is preloaded in the MCU flash memory for easy demonstration of the SPC574S-DISP in stand-alone mode.

## Revision history

**Table 1. Document revision history**

Date	Version	Changes
12-Aug-2019	1	Initial release.

## Contents

<b>1</b>	<b>System requirements .....</b>	<b>2</b>
<b>2</b>	<b>Development toolchain .....</b>	<b>3</b>
<b>3</b>	<b>Demonstration software .....</b>	<b>4</b>
	<b>Revision history .....</b>	<b>5</b>

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Development Boards & Kits - Other Processors](#) category:*

*Click to view products by [STMicroelectronics](#) manufacturer:*

Other Similar products are found below :

[EVB-MEC1418MECC](#) [20-101-1252](#) [C29XPCIE-RDB](#) [CC-ACC-18M433](#) [STM8S/32-D/RAIS](#) [MAX1464EVKIT](#) [RTK0EN0001D01001BZ](#)  
[MAXQ622-KIT#](#) [YR0K50571MS000BE](#) [YQB-R5F1057A-TB](#) [QB-R5F104PJ-TB](#) [CC-ACC-ETHMX](#) [OV-7604-C7-EVALUATION-BOARD](#)  
[SK-AD02-D62Q1747TB](#) [SK-BS01-D62Q1577TB](#) [ST7MDT1-EMU2](#) [GROVE BASE KIT FOR RASPBERRY PI](#) [CAB M-M\(40-17-](#)  
[RAINBOW\)](#) [CY8CKIT-143A](#) [EK-MPC5744P](#) [KITAURIXTC234TFTTOBO1](#) [ENW89854AXKF](#) [ENWF9201AVEF](#) [QB-R5F104LE-TB](#)  
[LV18F V6 64-80-PIN TQFP MCU CARD EMPTY](#) [LV-24-33 V6 44-PIN TQFP MCU CARD EMPTY](#) [LV-24-33 V6 64-PIN TQFP MCU](#)  
[CARD EMPTY](#) [LV-24-33 V6 80-PIN TQFP 1 MCU CARD EMPTY](#) [32X32 RGB LED MATRIX PANEL - 6MM PITCH](#) [3.3 - 5](#)  
[VTRANSLATOR](#) [READY FOR XMEGA CASING \(WHITE\)](#) [RELAY4 BOARD](#) [ETHERNET CONNECTOR](#) [RFID CARD 125KHZ - TAG](#)  
[RFID READER](#) [RFM12B-DEMO](#) [MAROON](#) [3G CLICK \(FOR EUROPE AND AUSTRALIA\)](#) [MAX232](#) [MAX3232 BOARD](#) [ARTY S7-50](#)  
[TINKERKIT HALL SENSOR](#) [TOUCHPANEL](#) [TOUCHPANEL CONTROLLER](#) [MIKROBOARD FOR AVR WITH ATMega128](#)  
[MIKROBOARD FOR PSOC WITH CY8C27643](#) [MIKROBUS CAPE](#) [MIKRODRIVE](#) [MIKROETH 100 BOARD](#) [MIKROLAB FOR 8051 L](#)