


Features

- STM32F73018K6 Arm® Cortex®-M7 core-based microcontroller featuring 64 Kbytes of Flash memory and 176+16 Kbytes of RAM, in a BGA176 package
- TFT LCD 240x240 pixels with touch panel
- USB OTG HS FS
- SAI audio codec
- 4 ST-MEMS microphones
- 512-Mbit Quad-SPI Flash memory
- 8-Mbit external PSRAM
- 1 user and reset push-button
- Board connectors:
 - USB with Micro-AB
 - Audio jack for external speakers and microphone
- Board expansion connectors:
 - Arduino™ Uno V3
 - ESP-01 Wi-Fi® module connector
 - Pmod™
 - STMod+
- On-board ST-LINK/V2-1 supporting USB re-enumeration capability: mass storage, Virtual COM port, debug port
- Flexible power-supply options: ST-LINK USB V_{BUS} or external sources
- Power supply output for external applications: 3.3 V or 5 V
- Fanout board (included inside the board package) compatible with MikroElektronika Click boards, ESP-01 and Seeed Studio™ Grove modules. Provision for headers for direct breadboard plug-in.
- Comprehensive free software including a variety of examples available with the STM32Cube™ MCU Package

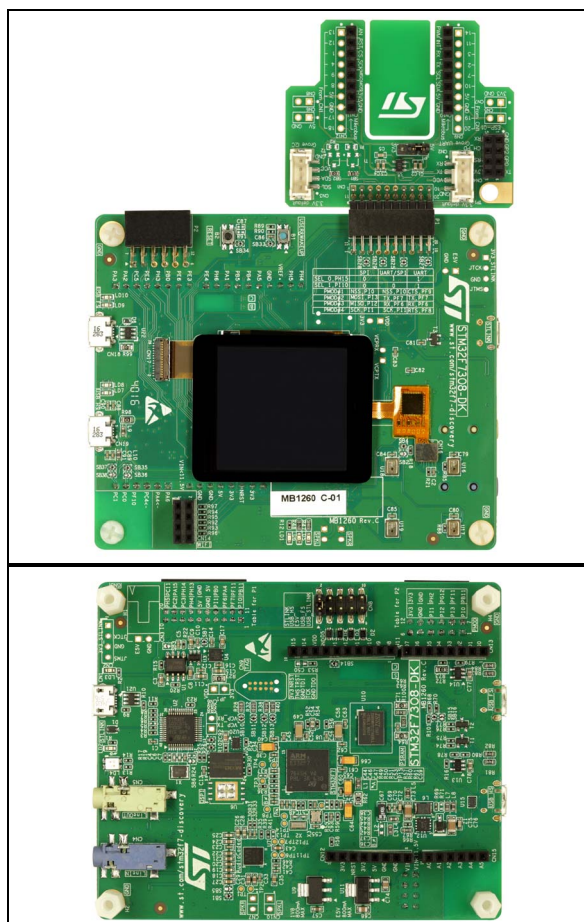

From top to bottom: top view of the STM32F7308-DK Discovery kit with the Fanout board connected and bottom view of the STM32F7308-DK Discovery kit without the Fanout board. Pictures are not contractual.

- Support of a wide choice of Integrated Development Environments (IDEs) including IAR™, Keil®, GCC-based IDEs

Description

The STM32F7308-DK Discovery kit allows users to develop applications with the microcontrollers of the STM32F7 Series, based on the Arm[®] Cortex[®]-M7 core.

The STM32F7308-DK Discovery kit enables a wide diversity of applications, taking benefit from audio, multi-sensor support, graphics, security, video, and high-speed connectivity features.

The Pmod[™], STMod+ and Arduino[™] Uno V3 connectivity support provides unlimited expansion capabilities with a large choice of specialized add-on boards.

General information

The STM32F7308-DK Discovery kit features an STM32F7 Series microcontroller based on the Arm^{®(a)} Cortex[®]-M7 core.



System requirements

- Windows[®] OS (7, 8 and 10), Linux[®] 64-bit or macOS^{®(b)}
- USB Type-A to Micro-B cable

Development toolchains

- Keil[®]: MDK-ARM^(c)
- IAR[™]: EWARM^(c)
- GCC-based IDEs

a. Arm is a registered trademark of Arm Limited (or its subsidiaries) in the US and or elsewhere.

b. macOS[®] is a trademark of Apple Inc. registered in the U.S. and other countries.

c. On Windows[®] only.

Demonstration software

The demonstration software, included in the STM32Cube MCU Package, is preloaded in the STM32 Flash memory for easy demonstration of the device peripherals in standalone mode. The latest versions of the demonstration source code and associated documentation can be downloaded from the www.st.com/stm32f7-discovery webpage.

Ordering information

To order the STM32F7308-DK Discovery kit, refer to [Table 1](#):

Table 1. Ordering information

Order code	Target STM32
STM32F7308-DK	STM32F730I8K6

Revision history

Table 2. Document revision history

Date	Revision	Changes
18-Oct-2018	1	Initial release.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - ARM category](#):

Click to view products by [STMicroelectronics manufacturer](#):

Other Similar products are found below :

[SAFETI-HSK-RM48](#) [PICOHOBBITFL](#) [CC-ACC-MMK-2443](#) [TWR-MC-FRDMKE02Z](#) [EVALSPEAR320CPU](#) [EVB-SCMIMX6SX](#)
[MAX32600-KIT#](#) [TMDX570LS04HDK](#) [TXSD-SV70](#) [OM13080UL](#) [EVAL-ADUC7120QSPZ](#) [OM13082UL](#) [TXSD-SV71](#)
[YGRPEACHNORMAL](#) [OM13076UL](#) [PICODWARFFL](#) [YR8A77450HA02BG](#) [3580](#) [32F3348DISCOVERY](#) [ATTINY1607](#) [CURIOSITY](#)
[NANO](#) [PIC16F15376](#) [CURIOSITY NANO BOARD](#) [PIC18F47Q10](#) [CURIOSITY NANO](#) [VISIONSTK-6ULL V.2.0](#) [80-001428](#) [DEV-17717](#)
[EAK00360](#) [YR0K77210B000BE](#) [RTK7EKA2L1S00001BE](#) [MAX32651-EVKIT#](#) [SLN-VIZN-IOT](#) [LV18F V6 DEVELOPMENT SYSTEM](#)
[READY FOR AVR BOARD](#) [READY FOR PIC BOARD](#) [READY FOR PIC \(DIP28\)](#) [EVB-VF522R3](#) [AVRPLC16 V6 PLC SYSTEM](#)
[MIKROLAB FOR AVR XL](#) [MIKROLAB FOR PIC L](#) [MINI-AT BOARD - 5V](#) [MINI-M4 FOR STELLARIS](#) [MOD-09.Z](#) [BUGGY +](#)
[CLICKER 2 FOR PIC32MX + BLUETOOT](#) [1410](#) [LETS MAKE PROJECT PROGRAM. RELAY PIC](#) [LETS MAKE - VOICE](#)
[CONTROLLED LIGHTS](#) [LPC-H2294](#) [DSPIC-READY2 BOARD](#) [DSPIC-READY3 BOARD](#) [MIKROBOARD FOR ARM 64-PIN](#)
[MIKROLAB FOR AVR](#)