



# SMD Power Inductor 0412CDMCC/DS




Halogen  
Free



## Dimension - [mm]

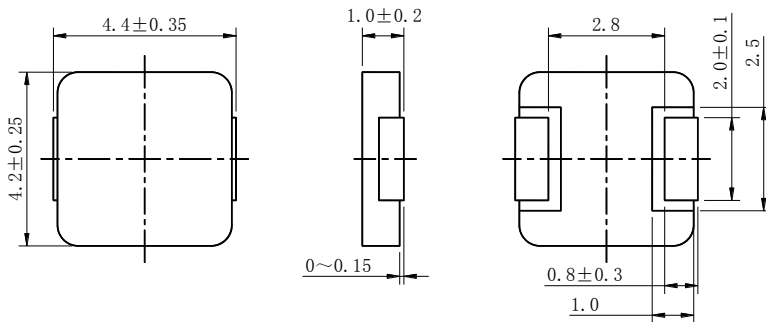

## Land pattern and Schematics - [mm]

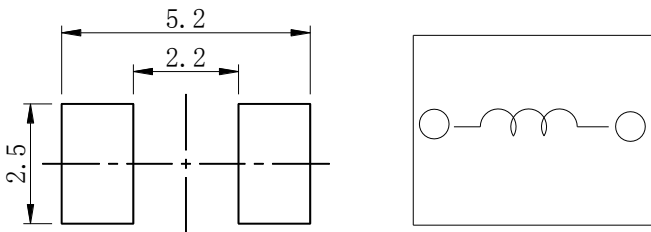

## Description

- Metal compound molding type construction.
- Magnetically shielded.
- Low audible core noise.
- Suitable for large current.
- L × W × H: 4.75 × 4.45 × 1.2 mm Max.
- Product weight: 0.16g (Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.
- Halogen Free available.

## Environmental Data

- Operating temperature range: -55°C ~ +125°C (including coil's self temperature rise)
- Storage temperature range: -55°C ~ +125°C
- Solder reflow temperature: 260 °C peak.

## Packaging

- Carrier tape and reel packaging.
- 3000pcs/Reel.

## Applications

- Ideally used in notebook, ultrabook, tablet PC, LCD display, Server application.
- HDD, SSD modules application.
- High current, POL converters.
- Low profile, high current power supplies.
- Battery powered devices.
- DC/DC converters in distributed power systems.



### Electrical Characteristics

| Part No.          | Stamp | Inductance( $\mu$ H)<br>[Within]<br>※1 | D.C.R(m $\Omega$ )<br>Max.(Typ.)<br>at 25°C | Saturation Current<br>(A)Max.(Typ.)<br>at 25°C ※2 | Temperature<br>rise current(A)<br>Typ.※3 |
|-------------------|-------|--|---|---|--|
| 0412CDMCCDS-R10MC | R10   | 0.10 $\pm$ 20%                         | 7.2(6.0)                                    | 16.5(19.5)  | 11.5                                     |
| 0412CDMCCDS-R12MC | R12   | 0.12 $\pm$ 20%                         | 7.8(6.5)                                    | 16.0(19.0)  | 11.0                                     |
| 0412CDMCCDS-R15MC | R15   | 0.15 $\pm$ 20%                         | 9.6(8.0)                                    | 14.5(17.0)  | 9.4                                      |
| 0412CDMCCDS-R22MC | R22   | 0.22 $\pm$ 20%                         | 11.0(9.2)                                   | 12.0(14.0)  | 9.0                                      |
| 0412CDMCCDS-R33MC | R33   | 0.33 $\pm$ 20%                         | 19(17)                                      | 9.4(11.0)   | 6.5                                      |
| 0412CDMCCDS-R47MC | R47   | 0.47 $\pm$ 20%                         | 21(19)                                      | 8.2(9.7)  | 6.0                                      |
| 0412CDMCCDS-R68MC | R68   | 0.68 $\pm$ 20%                         | 36(32)                                      | 6.9(8.0)  | 4.7                                      |
| 0412CDMCCDS-1R0MC | 1R0   | 1.0 $\pm$ 20%                          | 47(43)                                      | 6.0(7.1)  | 4.1                                      |
| 0412CDMCCDS-1R5MC | 1R5   | 1.5 $\pm$ 20%                          | 75(68)                                      | 3.6(4.2)  | 2.9                                      |
| 0412CDMCCDS-2R2MC | 2R2   | 2.2 $\pm$ 20%                          | 84(80)                                      | 3.4(4.0)  | 2.7                                      |
| 0412CDMCCDS-3R3MC | 3R3   | 3.3 $\pm$ 20%                          | 140(125)                                    | 3.2(3.8)  | 2.1                                      |
| 0412CDMCCDS-4R7MC | 4R7   | 4.7 $\pm$ 20%                          | 195(175)                                    | 2.6(3.1)  | 1.8                                      |

※1 Measuring frequency Inductance at 100kHz 1V.

※2 Saturation current: This indicates the value of D.C. current when the inductance becomes 30% lower than its initial value.

※3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes  $\Delta T=40^{\circ}\text{C}$  ( $T_a=25^{\circ}\text{C}$ ).


(Test board condition: FR4, Copper=70 $\mu\text{m}$ , four-layer PWB t=1.6mm)

# SMD Power Inductor 0412CDMCC/DS




## Saturation Current & Temperature Rise Graph

— L (20°C) —  $\Delta T$

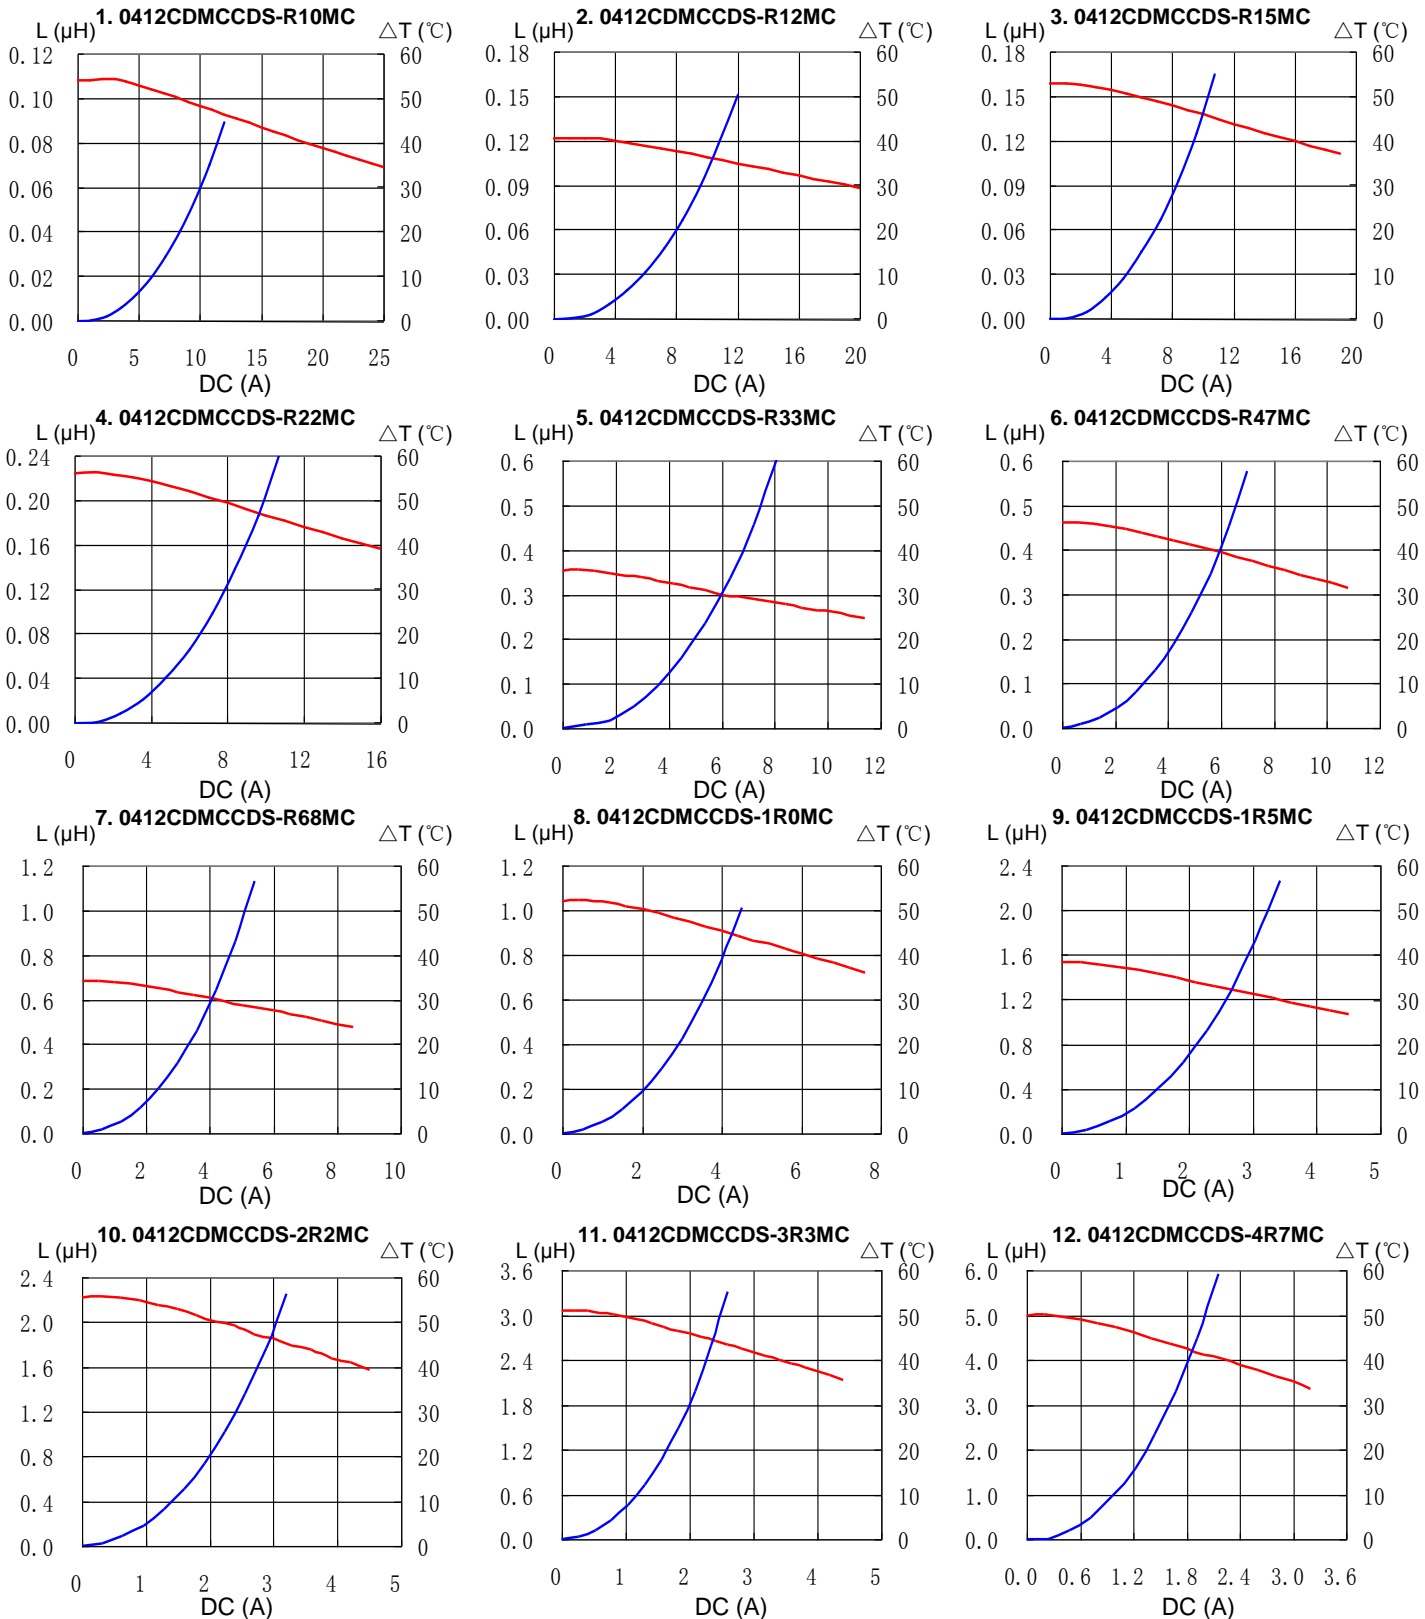


# SMD Power Inductor 0412CDMCC/DS

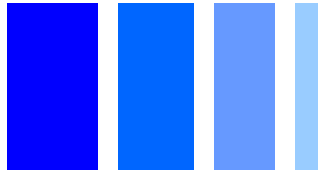


## Solder Reflow Condition

**Heat Endurance**

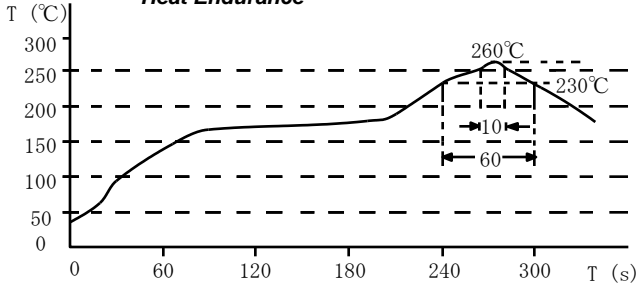

**Temperature Chart**

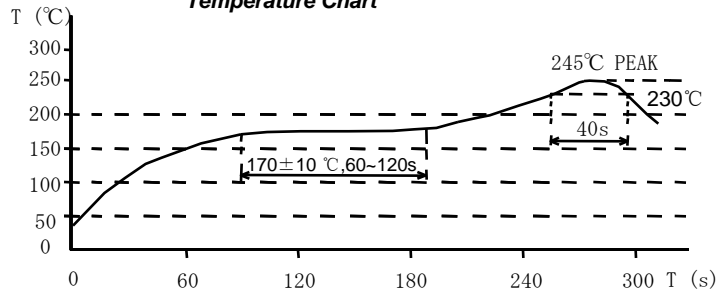

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Inductors - SMD category](#):*

*Click to view products by [Sumida manufacturer](#):*

Other Similar products are found below :

[SPD62R-472M](#) [LLQPB201214T1R0M](#) [LLXND3030QKT470MNG](#) [LLQPB160807T4R7M](#) [LLAPB2016KKTR33M](#)  
[LBXND4040TKL330MDG](#) [LLXNE3030KKT4R7MN](#) [LSQEA201212T100M](#) [IHLP5050CEER4R7M06](#) [LVS505020-1R0T-N](#) [LVS505040-1R2T-N](#) [LVS606020-1R5M-N](#) [LVS606028-6R8M-N](#) [LVS606045-102M-N](#) [LVS606045-150M-N](#) [LVS606045-1R8M-N](#) [LVS606045-6R8M-N](#) [LVS808040-2R0M-N](#) [LVS808040-330M-N](#) [LVS808040-4R7M-N](#) [MHCI06030-R56M-R8](#) [SCD0403T-470M-N](#) [SCD0403T-6R8K-N](#) [SCD0504T-101M-N](#) [SCD0504T-120M-N](#) [SCD0504T-221M-N](#) [SCD0504T-470M-N](#) [SCD0504T-471M-N](#) [SCD0705T-180M-N](#) [SCD0705T-221M-N](#) [SCD0705T-470M-N](#) [SCD1005T-101M-N](#) [SCD1005T-221M-N](#) [SCD1005T-470M-N](#) [SSL1306T-101M-N](#) [LQB15NNR27K10D](#) [201610CDMCDDS-R47MC](#) [201610CDMCDDS-1R0MC](#) [201610CDMCDDS-R68MC](#) [LSQPB201210T220M](#) [LBCNF2012KKTR24MA](#) [LSQEA201212T220K](#) [LSENC2016KKT1R0M](#) [LSBHB1608KKT2R2MG](#) [LSQPB160807T2R2M](#) [LSQEA201212T101K](#) [LCXND4040MKL4R7MDG](#) [DEM8045Z-5R6N=P3](#) [LCXNH8080YKL101MJG](#) [LSCNA2012KKT1R0MA](#)