

SMD Power Inductor

125CDMCC/DS



Description

- Metal compound molding type construction
- Magnetically shielded
- Low audible core noise
- Suitable for large current
- LxWxH: 13.8x12.9x5.0mm Max.
- Product weight: 4.5 g (Ref.)
- Moisture Sensitivity Level: 1



Environmental Data

- Operating temperature range: -55°C~+125°C (including coil's self temperature rise)
- Storage temperature range: -55°C~+125°C


Packaging

- Carrier tape and reel packaging
- 500pcs per reel

Applications

- Ideally used in notebook, tablet PC, LCD display, Server application
- High current, POL converters
- Low profile, high current power supplies
- Battery powered devices
- DC/DC converters in distributed power systems

Dimension - [mm]

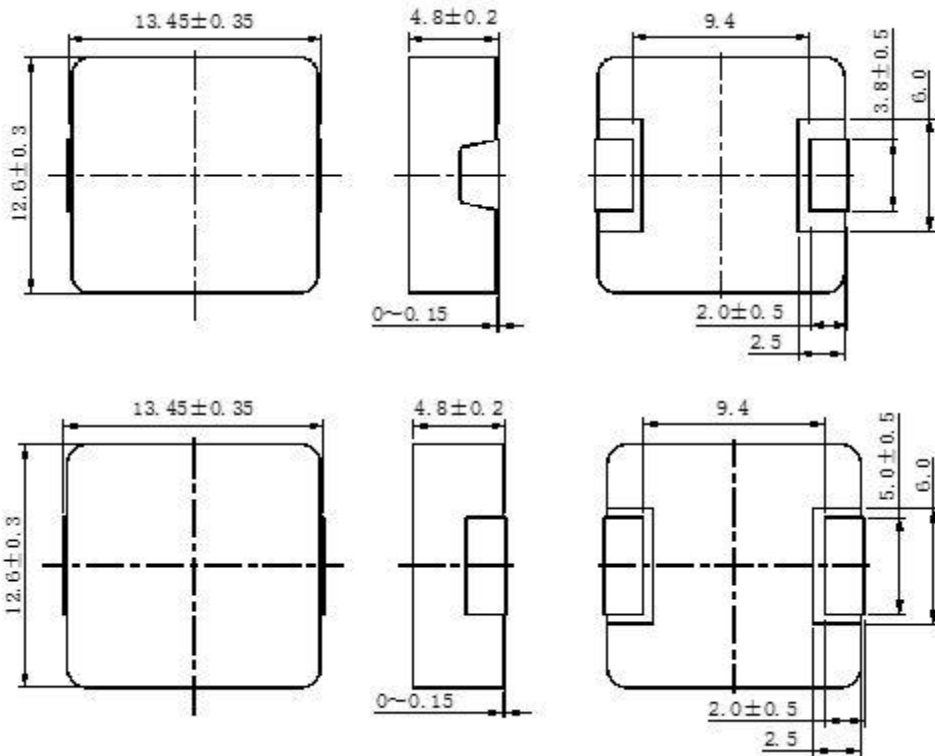


SMD Power Inductor


125CDMCC/DS



Recommended Land pattern - [mm]

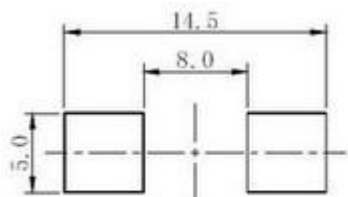


(0.36µH~2.2µH)

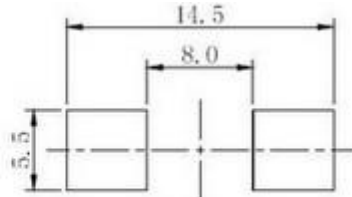

(3.3µH~47µH)

Wire Connection

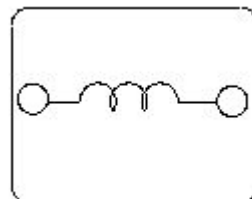

SMD Power Inductor

125CDMCC/DS



Electrical Characteristics

Part Number	Inductance [Within] (μ H) ※1	D.C.R. at 20°C Max.(Typ.) (m Ω)	Saturation Current (A) Max.(Typ.) ※2	Temperature Rise Current (A) Max.(Typ.) ※3
125CDMCCDS-R36MC	0.36 \pm 20%	0.95 (0.72)	68.00 (80.00)	(40.00)
125CDMCCDS-R47MC	0.47 \pm 20%	1.10 (0.80)	53.00 (62.00)	(37.00)
125CDMCCDS-R68MC	0.68 \pm 20%	1.30 (1.10)	51.00 (60.00)	(33.00)
125CDMCCDS-R82MC	0.82 \pm 20%	1.80 (1.50)	42.50 (50.00)	(31.00)
125CDMCCDS-1R0MC	1.00 \pm 20%	1.90 (1.60)	40.00 (47.00)	(28.00)
125CDMCCDS-1R5MC	1.50 \pm 20%	3.30 (2.80)	32.00 (38.00)	(22.00)
125CDMCCDS-1R8MC	1.80 \pm 20%	3.50 (3.00)	30.00 (35.00)	(21.00)
125CDMCCDS-2R2MC	2.20 \pm 20%	4.20 (3.50)	29.00 (34.00)	(20.00)
125CDMCCDS-3R3MC	3.30 \pm 20%	7.80 (6.50)	23.00 (27.00)	(17.00)
125CDMCCDS-4R7MC	4.70 \pm 20%	10.00 (8.40)	19.00 (22.00)	(14.00)
125CDMCCDS-6R8MC	6.80 \pm 20%	18.00 (14.50)	14.00 (17.00)	(11.00)
125CDMCCDS-8R2MC	8.20 \pm 20%	19.00 (16.00)	13.00 (15.00)	(10.00)
125CDMCCDS-100MC	10.00 \pm 20%	22.00 (19.00)	12.00 (14.00)	(9.00)
125CDMCCDS-150MC	15.00 \pm 20%	26.00 (22.00)	9.40 (11.00)	(8.50)
125CDMCCDS-220MC	22.00 \pm 20%	40.40 (33.70)	7.20 (8.50)	(6.50)
125CDMCCDS-330MC	33.00 \pm 20%	57.00 (47.50)	6.10 (7.20)	(6.00)
125CDMCCDS-470MC	47.00 \pm 20%	97.20 (81.00)	5.40 (6.30)	(4.50)

※1 Measuring frequency Inductance at 100kHz, 1V

※2 Saturation current: This indicates the actual value of D.C. current when the inductance becomes 30% lower than its initial value



※3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes $\Delta T=40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$).
(Test board condition: FR4, Copper=70 μ m, four-layer PWB t=1.6mm)

SMD Power Inductor

125CDMCC/DS



Solder Reflow Condition

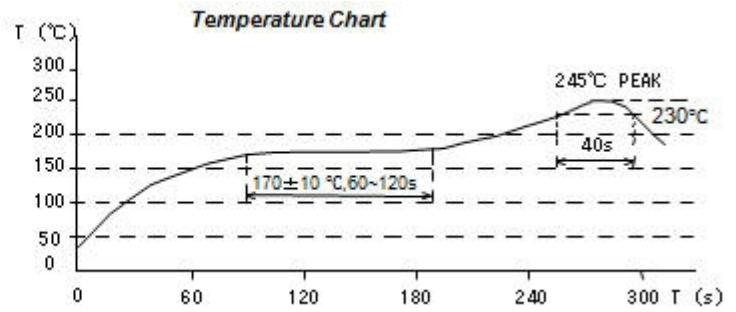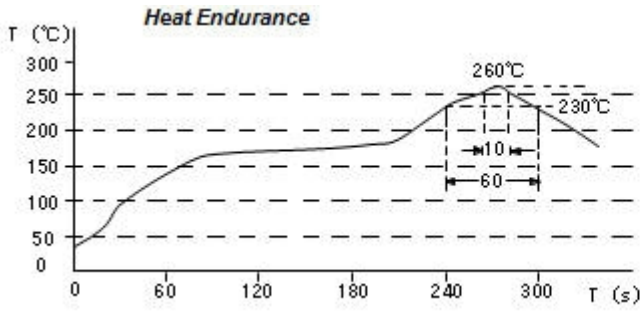

Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor


125CDMCC/DS




Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT


1. 125CDMCCDS-R36MC

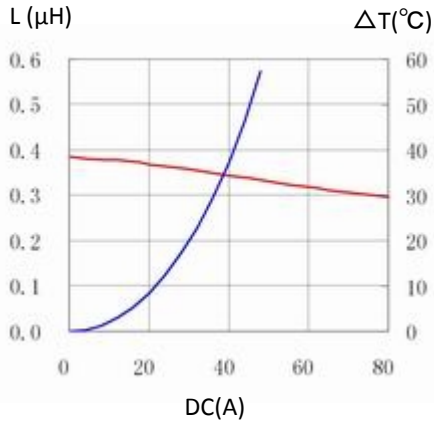


2. 125CDMCCDS-R47MC

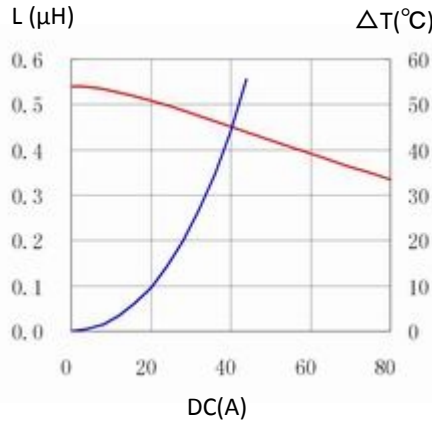


3. 125CDMCCDS-R68MC

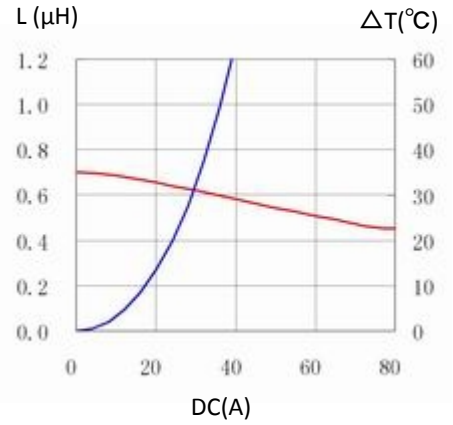


4. 125CDMCCDS-R82MC

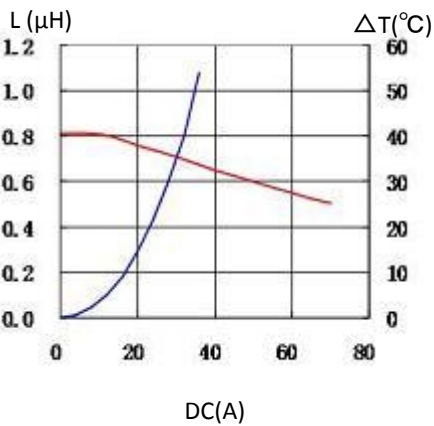


5. 125CDMCCDS-1R0MC

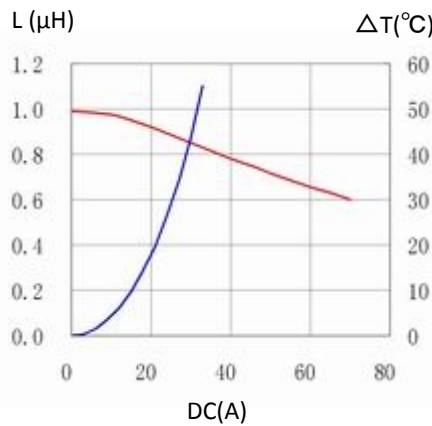


6. 125CDMCCDS-1R5MC

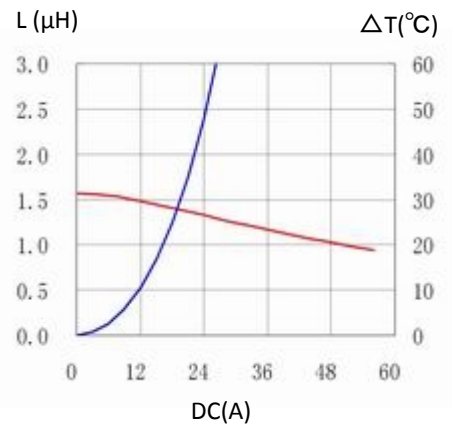


7. 125CDMCCDS-1R8MC

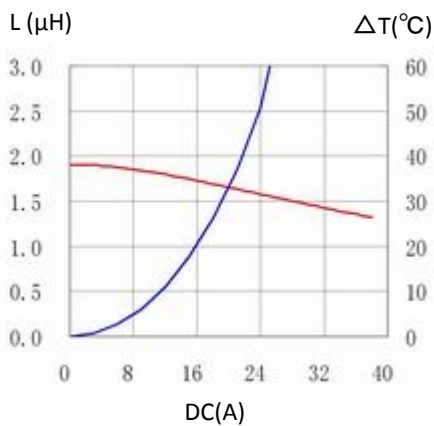

8. 125CDMCCDS-2R2MC

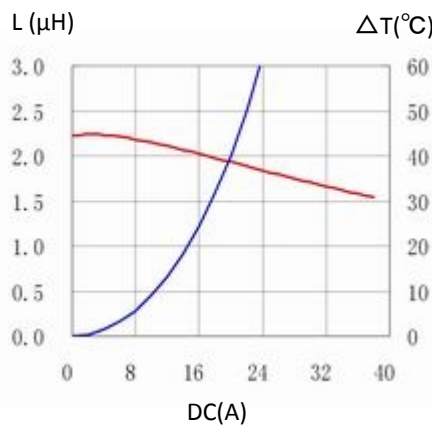

9. 125CDMCCDS-3R3MC

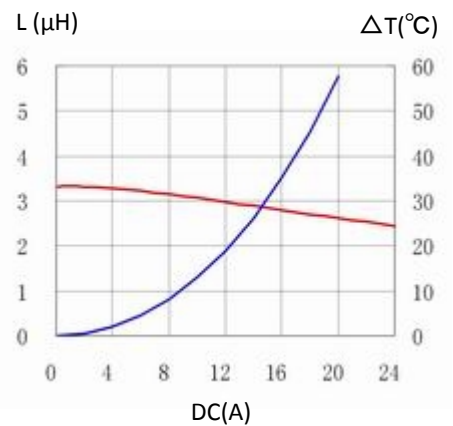


Note: This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor


125CDMCC/DS




10. 125CDMCCDS-4R7MC

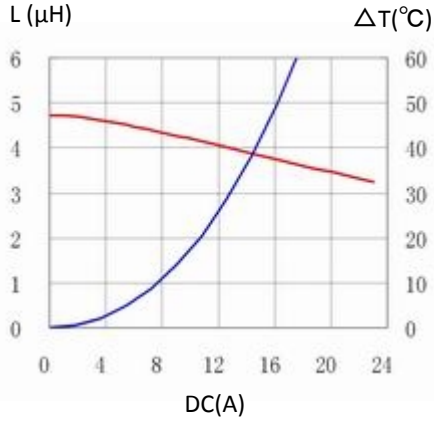


11. 125CDMCCDS-6R8MC

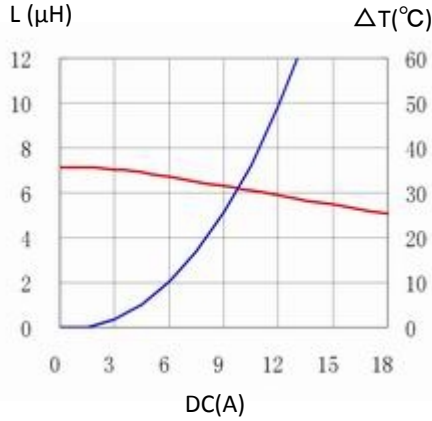


12. 125CDMCCDS-8R2MC

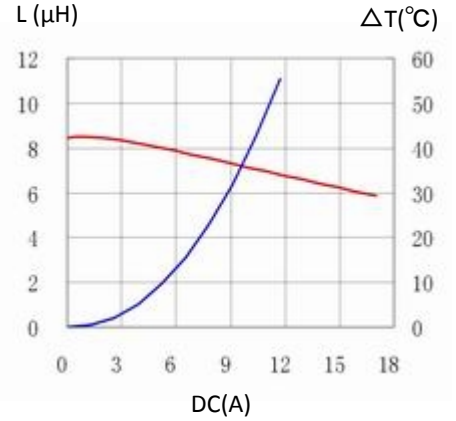


13. 125CDMCCDS-100MC

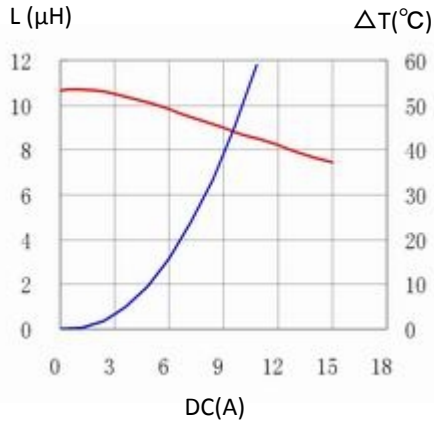


14. 125CDMCCDS-150MC

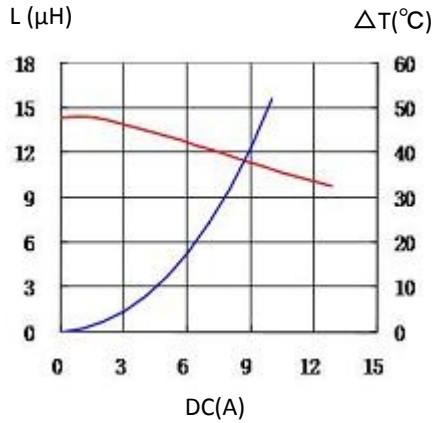


15. 125CDMCCDS-220MC

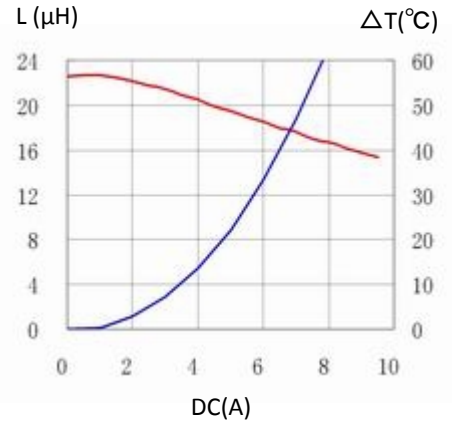

16. 125CDMCCDS-330MC

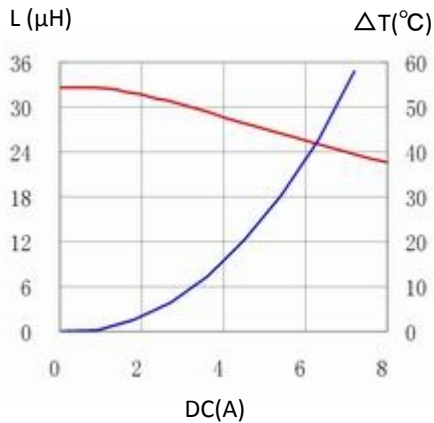

17. 125CDMCCDS-470MC

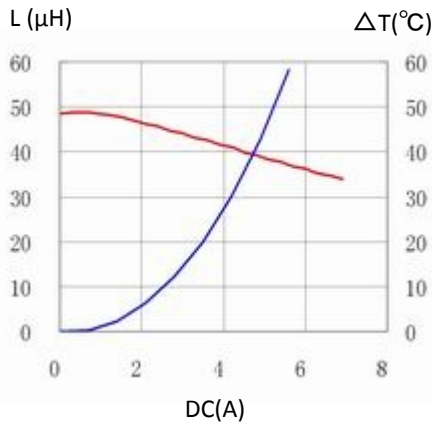

For sales office information, please [click here](#) to visit our website.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)