


SMD Power Inductor

252012CDMCD/DS



特点

- Metal compound molding type construction
- Magnetically shielded
- Low audible core noise
- Suitable for large current.
- L×W×H:2.7×2.2×1.2mm Max.
- Product weight: 0.38mg (Ref.)
- Moisture Sensitivity Level: 1



环境规格

- Operating temperature range: -55° C~+125° C (including coil's self temperature rise)
- Storage temperature range: -55° C~+125° C


包装

- Carrier tape and reel packaging.
- 3000Pcs per reel

用途

- DC/DC converter for CPU in Notebook PC. Smartphones, LCD displays, HDDs, DVDs, DVCs, DSCs, PDAs ect..
- Thin type on-board power supply module for exchanger VRM for server.
- Low profile, high current power supplies
- Battery powered devices

外形尺寸 - [mm]

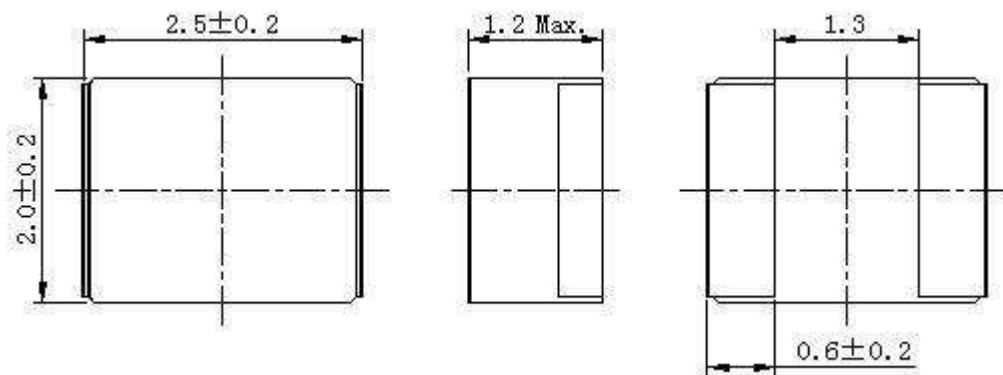


SMD Power Inductor


252012CDMCD/DS



推荐焊盘尺寸 - [mm]



接线图 (底面)

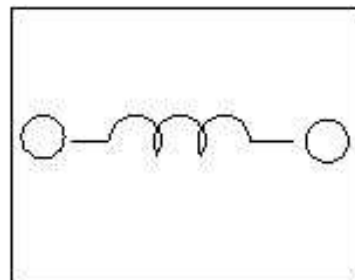



电气特性规格



品名	电感值 [within] (μ H) ※1	直流电阻 (20°C) max (typ) (m Ω)	直流饱和电流 (20°C) (A) ※2	温度上升电流 (A) ※3
252012CDMCDDS-R47MC	0.47 \pm 20%	21.00 (17.00)	7.30	6.10
252012CDMCDDS-R68MC	0.68 \pm 20%	30.00 (25.00)	6.30	5.50
252012CDMCDDS-1R0MC	1.00 \pm 20%	42.00 (35.00)	5.40	4.20
252012CDMCDDS-1R5MC	1.50 \pm 20%	61.00 (53.00)	3.60	3.60
252012CDMCDDS-2R2MC	2.20 \pm 20%	82.00 (68.00)	3.30	3.00

※1 Measuring frequency Inductance at 1MHz, 0.1V

※2 Saturation current: This indicates the value of D.C. current when the inductance becomes 30% lower than its initial value.

※3 Temperature rise current: The actual value of D.C. current when the temperature of coil becomes $\Delta T=40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$). (Test board condition: FR4, Copper=70 μm , four-layer PWB t=1.6mm)

回流焊耐热与推荐温度曲线图

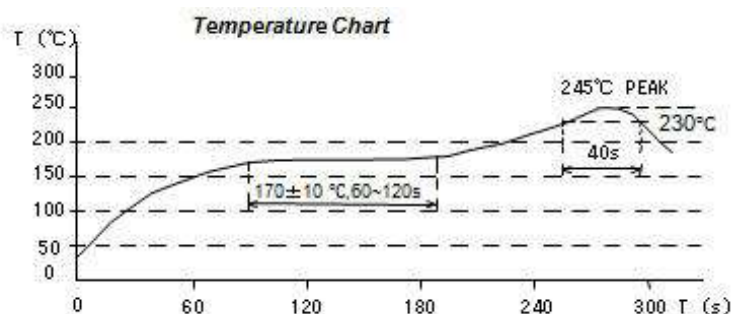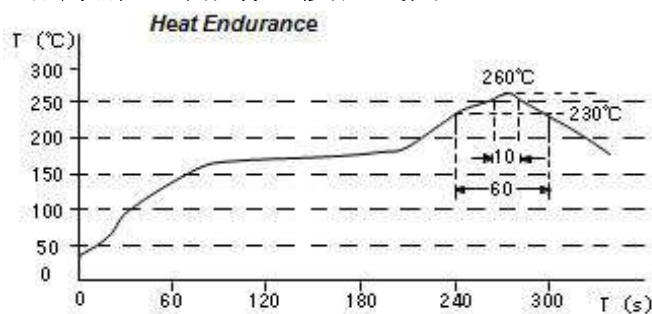

SMD Power Inductor


252012CDMCD/DS




直流饱和电流&温度上升曲线图

— L (20°C) — ΔT


1. 252012CDMCDDS-R47MC

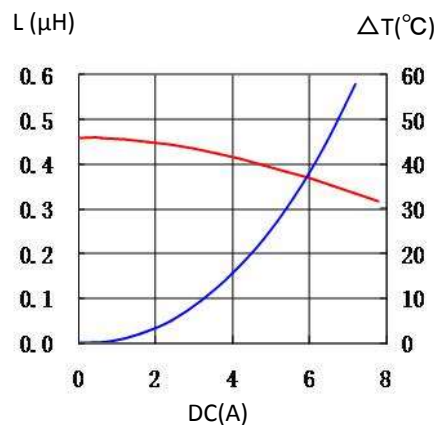


2. 252012CDMCDDS-R68MC

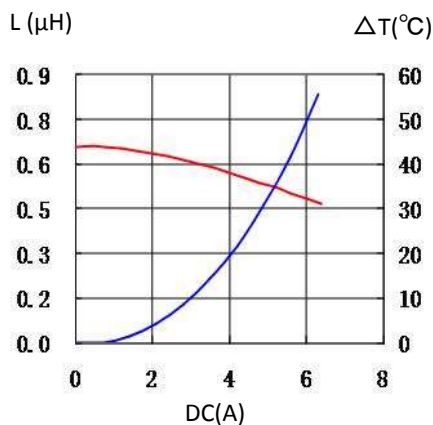


3. 252012CDMCDDS-1R0MC

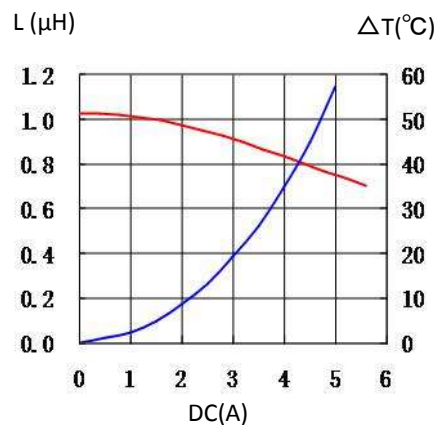

4. 252012CDMCDDS-1R5MC

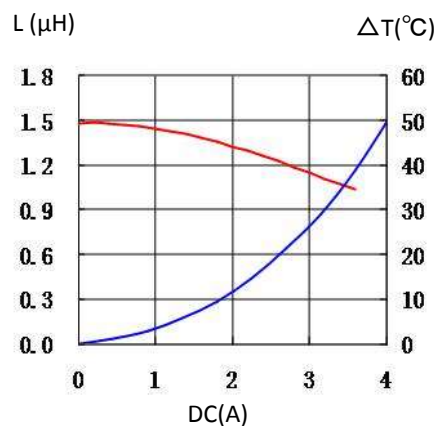

5. 252012CDMCDDS-2R2MC

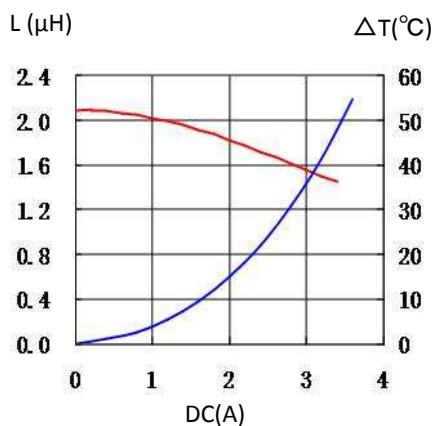

有关销售办事处的信息，请 [点击这里](#)。

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)