

SMD Power Inductor CDRH12D77B/T150



Provisional

Description


- Ferrite drum core construction
- Magnetically shielded
- Qualified AEC-Q200
- Operating Temperature: -55°C to +150°C (including self-heating)




Applications

- LED Head light for Automobile
- ECU, DC/DC converter
- Automotive and other high temperature, high reliability application


Dimension [mm]

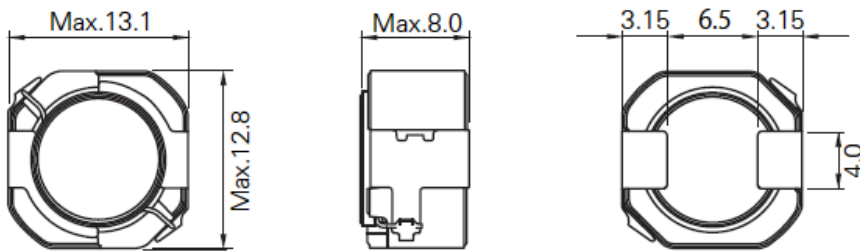

Reference Land pattern [mm]

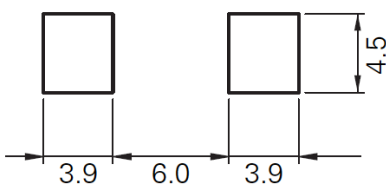

Connection



Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor CDRH12D77B/T150



Provisional

Electrical Characteristics

Part No.	Inductance (μH) ※1	D.C.R (m Ω) ($\pm 30\%$)	Saturation Current (A) at 20°C TYP. ※2	Temperature Rise Current (A) TYP. ※3
CDRH12D77BT150NP -1R0NC	1.0 $\pm 30\%$	4.5	31.0	14.0
CDRH12D77BT150NP -1R5NC	1.5 $\pm 30\%$	5.4	25.0	12.7
CDRH12D77BT150NP -2R2NC	2.2 $\pm 30\%$	6.3	20.6	11.7
CDRH12D77BT150NP -3R3NC	3.3 $\pm 30\%$	7.4	16.7	11.2
CDRH12D77BT150NP -4R2NC	4.2 $\pm 30\%$	8.4	14.7	10.5
CDRH12D77BT150NP -6R8NC	6.8 $\pm 30\%$	13.0	11.7	8.10
CDRH12D77BT150NP -100MC	10 $\pm 20\%$	15.8	9.70	7.50
CDRH12D77BT150NP -150MC	15 $\pm 20\%$	22.0	7.80	6.40
CDRH12D77BT150NP -220MC	22 $\pm 20\%$	34.0	6.40	5.10
CDRH12D77BT150NP -330MC	33 $\pm 20\%$	48.0	5.20	4.30
CDRH12D77BT150NP -470MC	47 $\pm 20\%$	60.0	4.40	4.00
CDRH12D77BT150NP -680MC	68 $\pm 20\%$	77.0	3.70	3.60
CDRH12D77BT150NP -101MC	100 $\pm 20\%$	115	3.05	2.80
CDRH12D77BT150NP -151MC	150 $\pm 20\%$	165	2.55	2.45
CDRH12D77BT150NP -221MC	220 $\pm 20\%$	265	2.05	1.80
CDRH12D77BT150NP -331MC	330 $\pm 20\%$	370	1.70	1.50
CDRH12D77BT150NP -471MC	470 $\pm 20\%$	510	1.40	1.32

※ Measuring frequency inductance at 100kHz, 1V.

※ Saturation current: DC current which becomes inductance value drop by 30% from the nominal value.

※ Temperature rise current: The value of D.C. current when the temperature of coil becomes $\Delta T=40^\circ\text{C}$ ($T_a=20^\circ\text{C}$).

Please note that when using the product for automotive while applying current with audio-frequency (AF) signals may result in audible noises due to magnetostriction. Also, in order to avoid noise problem, operating with Non-AF signals would be recommended. The noise may amplify depending on the coil mount area on the PCB.

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor


CDRH12D77B/T150




Provisional

Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT


CDRH12D77BT150NP-1R0NC

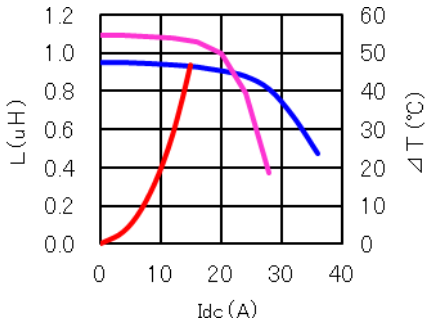


CDRH12D77BT150NP-1R5NC

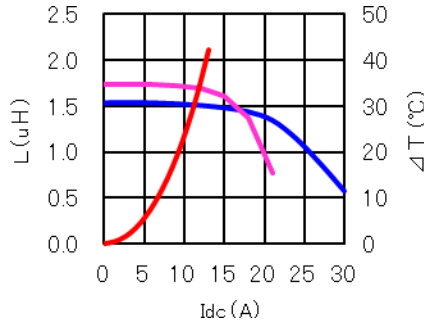


CDRH12D77BT150NP-2R2NC

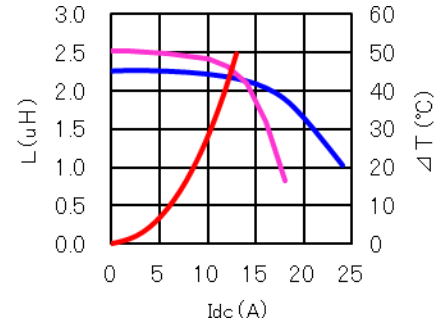


CDRH12D77BT150NP-3R3NC

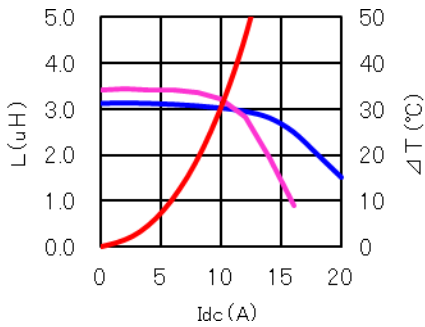


CDRH12D77BT150NP-4R2NC

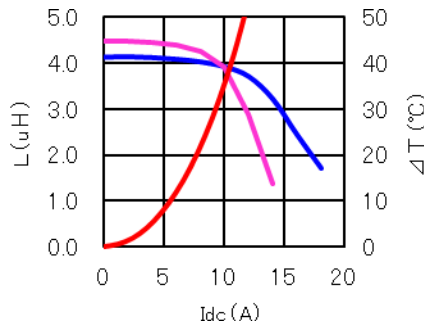


CDRH12D77BT150NP-6R8NC

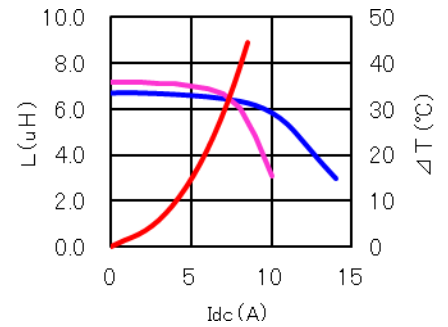


CDRH12D77BT150NP-100MC

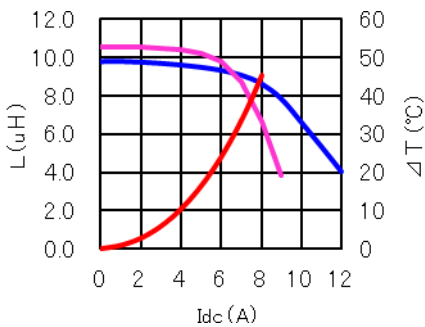

CDRH12D77BT150NP-150MC

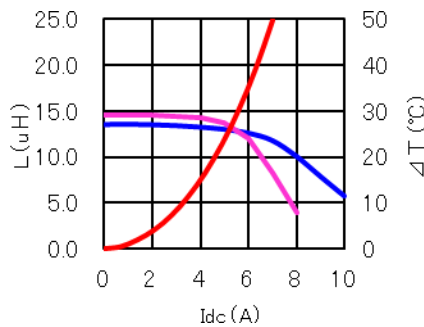

CDRH12D77BT150NP-220MC

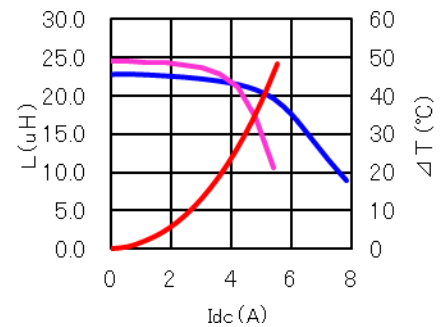

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


SMD Power Inductor CDRH12D77B/T150




Provisional

Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT


CDRH12D77BT150NP-330MC

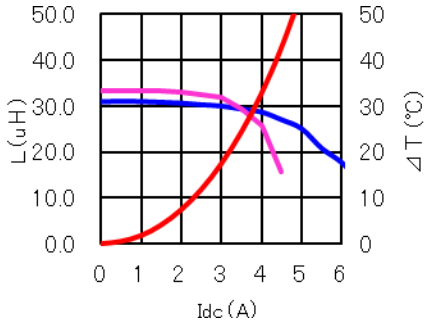


CDRH12D77BT150NP-470MC

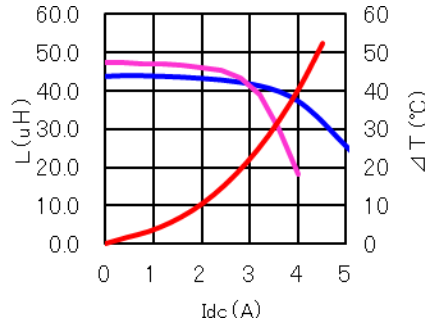


CDRH12D77BT150NP-680MC

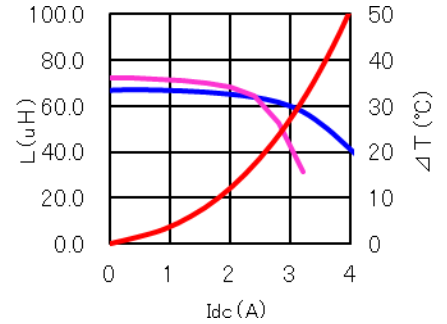


CDRH12D77BT150NP-101MC

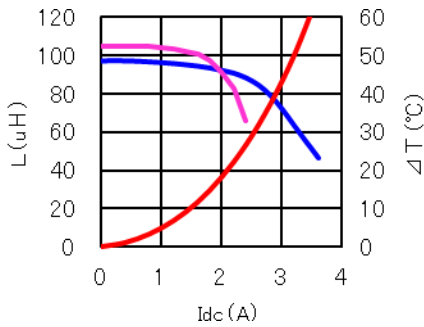


CDRH12D77BT150NP-151MC

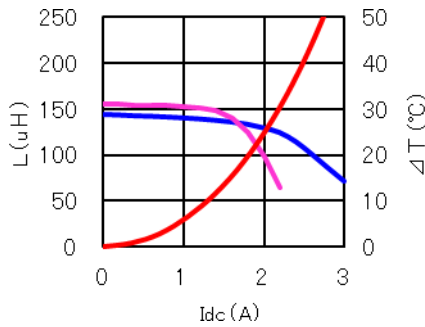


CDRH12D77BT150NP-221MC

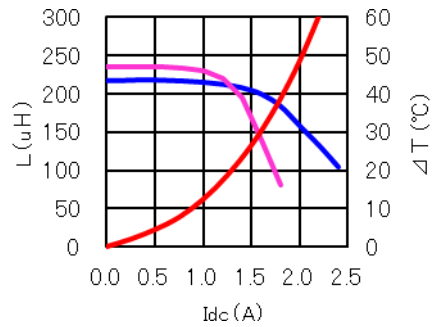

CDRH12D77BT150NP-331MC

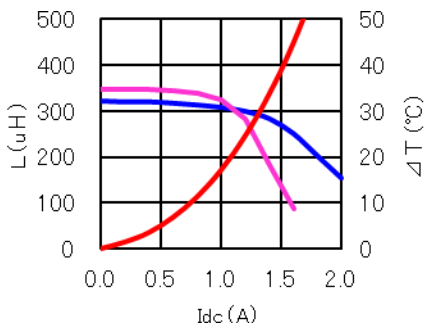

CDRH12D77B/T150NP-471MC

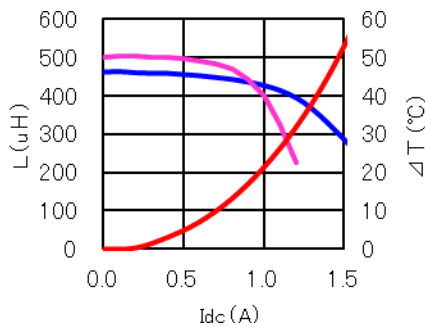

For sales office information, please [click here](#) to visit our website.

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#)