

SMD Power Inductor CDRH12D77B/T150



Provisional

Description


- Ferrite drum core construction
- Magnetically shielded
- Qualified AEC-Q200
- Operating Temperature: -55°C to +150°C (including self-heating)




Applications

- LED Head light for Automobile
- ECU, DC/DC converter
- Automotive and other high temperature, high reliability application


Dimension [mm]

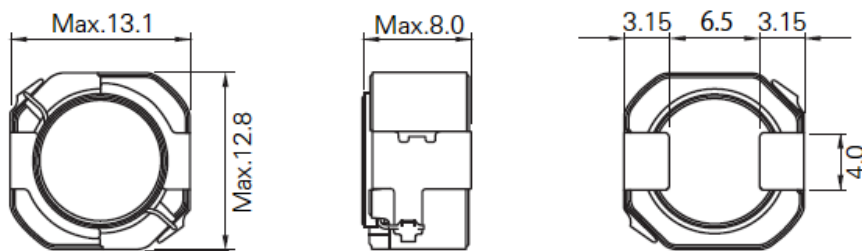


Reference Land pattern [mm]

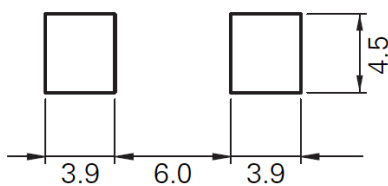

Stamp Example

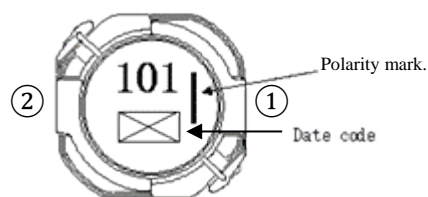

Connection (Bottom View)



Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor

CDRH12D77B/T150



Provisional

Electrical Characteristics

Part No.	Inductance (μ H) ※1	D.C.R (m Ω)	Saturation Current (A) at 20°C TYP. ※2	Temperature Rise Current (A) TYP. ※3
CDRH12D77BT150NP -1R0NC	1.0 \pm 30%	5.85(4.50)	31.0	14.0
CDRH12D77BT150NP -1R5NC	1.5 \pm 30%	7.02(5.40)	25.0	12.7
CDRH12D77BT150NP -2R2NC	2.2 \pm 30%	8.19(6.30)	20.6	11.7
CDRH12D77BT150NP -3R3NC	3.3 \pm 30%	9.62(7.40)	16.7	11.2
CDRH12D77BT150NP -4R2NC	4.2 \pm 30%	10.9(8.40)	14.7	10.5
CDRH12D77BT150NP -6R8NC	6.8 \pm 30%	16.9(13.0)	11.7	8.10
CDRH12D77BT150NP -100MC	10 \pm 20%	19.0(15.8)	9.70	7.50
CDRH12D77BT150NP -150MC	15 \pm 20%	27.6(23.0)	7.80	6.40
CDRH12D77BT150NP -220MC	22 \pm 20%	40.8(34.0)	6.40	5.10
CDRH12D77BT150NP -330MC	33 \pm 20%	57.6(48.0)	5.20	4.30
CDRH12D77BT150NP -470MC	47 \pm 20%	72.0(60.0)	4.40	4.00
CDRH12D77BT150NP -680MC	68 \pm 20%	92.4(77.0)	3.70	3.60
CDRH12D77BT150NP -101MC	100 \pm 20%	138(115)	3.05	2.80
CDRH12D77BT150NP -151MC	150 \pm 20%	198(165)	2.55	2.45
CDRH12D77BT150NP -221MC	220 \pm 20%	318(265)	2.05	1.80
CDRH12D77BT150NP -331MC	330 \pm 20%	444(370)	1.70	1.50
CDRH12D77BT150NP -471MC	470 \pm 20%	612(510)	1.40	1.32

※ Measuring frequency inductance at 100kHz,1V.

※ Saturation current: DC current which becomes inductance value drop by 30% from the nominal value.

※ Temperature rise current: The value of D.C. current when the temperature of coil becomes $\Delta T=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).

Please note that when using the product for automotive while applying current with audio-frequency (AF) signals may result in audible noises due to magnetostriction. Also, in order to avoid noise problem, operating with Non-AF signals would be recommended. The noise may amplify depending on the coil mount area on the PCB.


SMD Power Inductor CDRH12D77B/T150




Provisional

Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT


CDRH12D77BT150NP-1R0NC

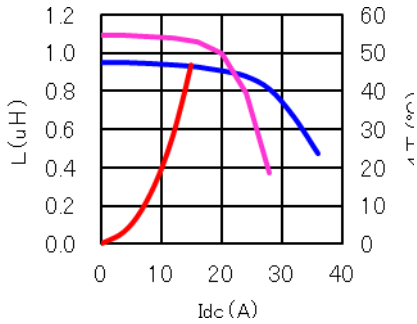


CDRH12D77BT150NP-1R5NC

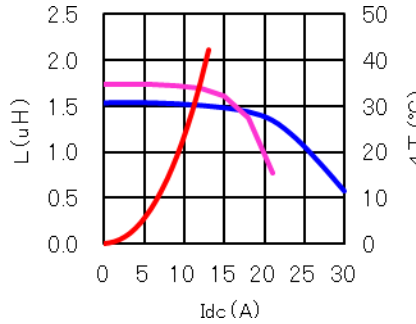


CDRH12D77BT150NP-2R2NC

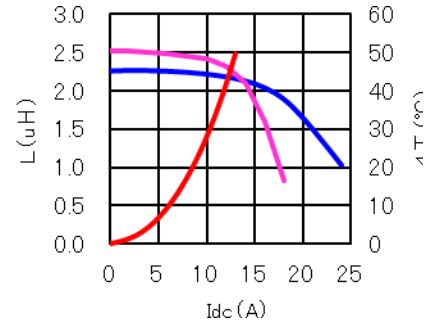


CDRH12D77BT150NP-3R3NC

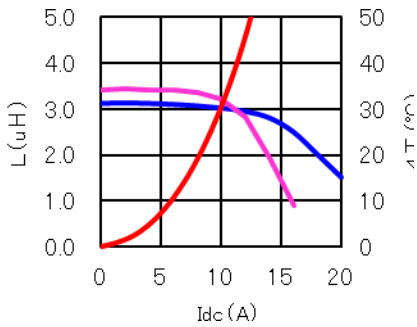


CDRH12D77BT150NP-4R2NC

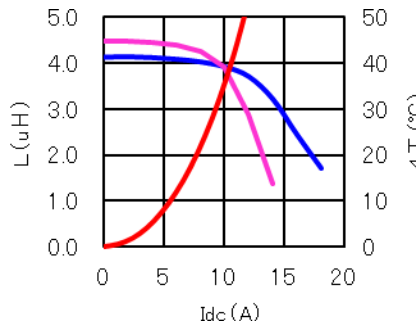


CDRH12D77BT150NP-6R8NC

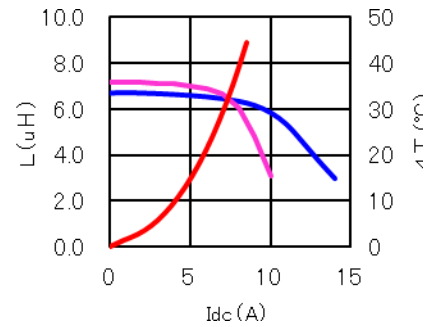


CDRH12D77BT150NP-100MC

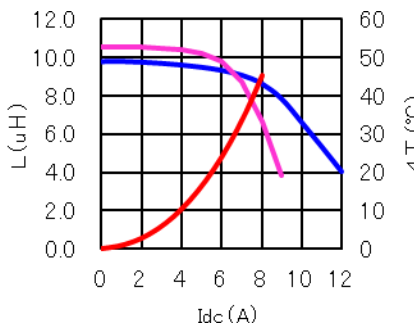

CDRH12D77BT150NP-150MC

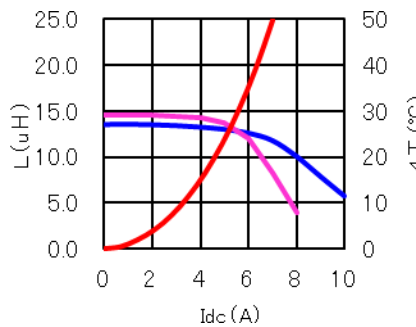

CDRH12D77BT150NP-220MC

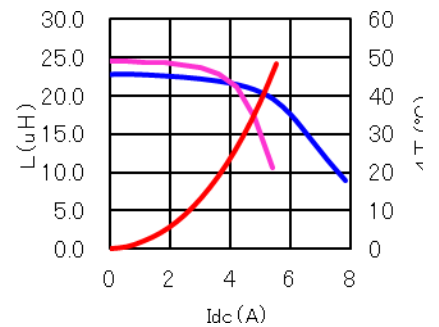

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.


SMD Power Inductor CDRH12D77B/T150




Provisional

Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT


CDRH12D77BT150NP-330MC

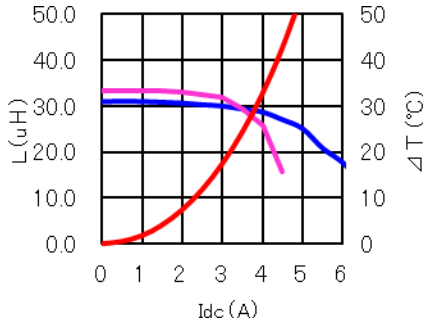


CDRH12D77BT150NP-470MC

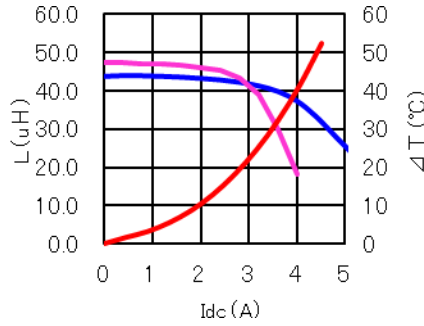


CDRH12D77BT150NP-680MC

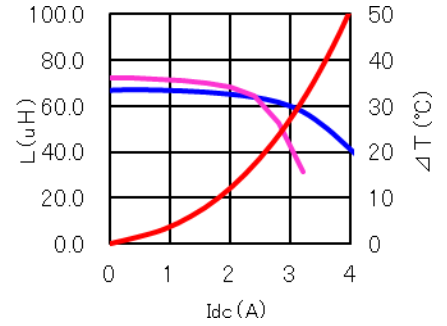


CDRH12D77BT150NP-101MC

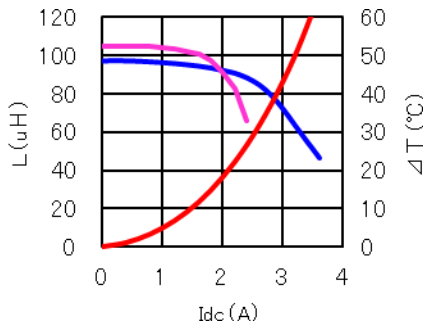


CDRH12D77BT150NP-151MC

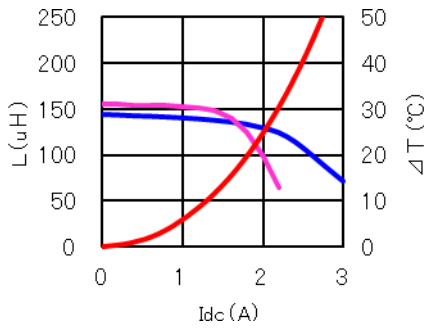


CDRH12D77BT150NP-221MC

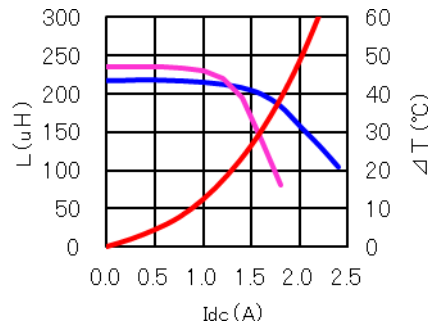

CDRH12D77BT150NP-331MC

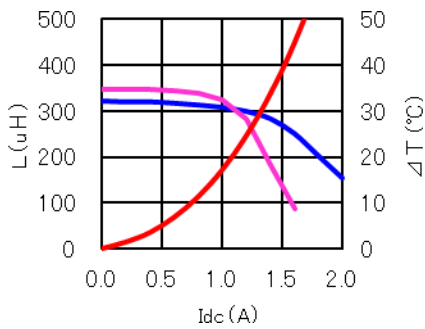

CDRH12D77B/T150NP-471MC

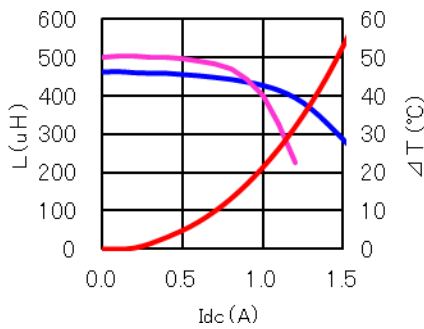

For sales office information, please [click here](#) to visit our website.

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [70F224AI](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#)
[PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#)
[HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-](#)
[RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#)
[1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#) [1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-](#)
[HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#) [NIN-HDR82JTRF](#) [NIN-HK2N7STRF](#) [NIN-PA150KTR370F](#) [NIN-PB100KTR550F](#)