

SMD Power Inductor CDRH80D65B/T150



Description


- Ferrite drum core construction
- Magnetically shielded
- Qualified AEC-Q200
- Operating Temperature: -55°C to +150°C (including self-heating)




Applications

- LED Head light for Automobile
- ECU, DC/DC converter
- Automotive and other high temperature, high reliability application


Dimension [mm]

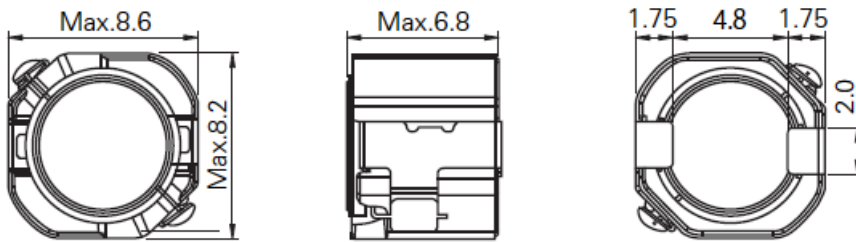

Reference Land pattern [mm]



Connection



Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor

CDRH80D65B/T150



Electrical Characteristics

Part No.	Inductance (μ H) ※1	D.C.R (m Ω) (\pm 30%)	Saturation Current (A) at 20°C TYP. ※2	Temperature Rise Current (A) TYP. ※3
CDRH80D65BT150NP-1R0NC	1.0 \pm 30%	6.4	14.3	8.74
CDRH80D65BT150NP-1R5NC	1.5 \pm 30%	7.5	11.6	7.80
CDRH80D65BT150NP-2R2NC	2.2 \pm 30%	9.6	9.50	6.71
CDRH80D65BT150NP-3R3NC	3.3 \pm 30%	10.8	7.65	6.35
CDRH80D65BT150NP-3R9NC	3.9 \pm 30%	11.8	7.05	6.10
CDRH80D65BT150NP-4R7NC	4.7 \pm 30%	13.2	6.49	5.49
CDRH80D65BT150NP-6R8NC	6.8 \pm 30%	15.8	5.40	5.02
CDRH80D65BT150NP-100MC	10 \pm 20%	19.8	4.50	4.54
CDRH80D65BT150NP-150MC	15 \pm 20%	35.0	3.55	3.16
CDRH80D65BT150NP-220MC	22 \pm 20%	49.0	2.94	2.83
CDRH80D65BT150NP-330MC	33 \pm 20%	86.0	2.42	1.93
CDRH80D65BT150NP-470MC	47 \pm 20%	105	2.02	1.74
CDRH80D65BT150NP-680MC	68 \pm 20%	131	1.67	1.57
CDRH80D65BT150NP-101MC	100 \pm 20%	168	1.41	1.37
CDRH80D65BT150NP-151MC	150 \pm 20%	267	1.17	1.09
CDRH80D65BT150NP-221MC	220 \pm 20%	475	0.94	0.73
CDRH80D65BT150NP-331MC	330 \pm 20%	646	0.77	0.67
CDRH80D65BT150NP-471MC	470 \pm 20%	799	0.64	0.61
CDRH80D65BT150NP-681MC	680 \pm 20%	1180	0.53	0.46
CDRH80D65BT150NP-102MC	1000 \pm 20%	1980	0.43	0.35

※ Measuring frequency inductance at 100kHz,1V.

※ Saturation current: DC current which becomes inductance value drop by 30% from the nominal value.

※ Temperature rise current: The value of D.C. current when the temperature of coil becomes $\Delta T=40^{\circ}\text{C}$ ($T_a=20^{\circ}\text{C}$).

Please note that when using the product for automotive while applying current with audio-frequency (AF) signals may result in audible noises due to magnetostriction. Also, in order to avoid noise problem, operating with Non-AF signals would be recommended. The noise may amplify depending on the coil mount area on the PCB.


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor CDRH80D65B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT


CDRH80D65BT150NP-1R0NC

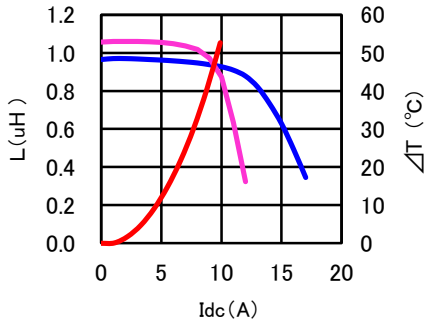


CDRH80D65BT150NP-1R5NC

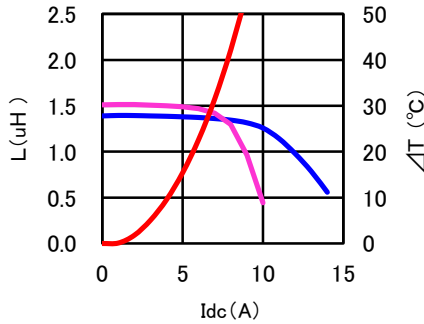


CDRH80D65BT150NP-2R2NC

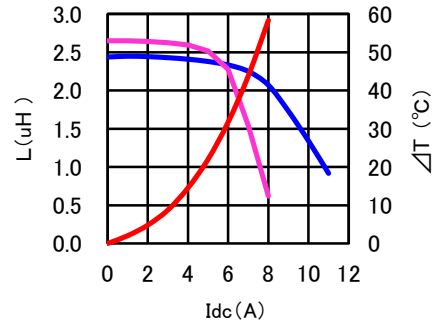


CDRH80D65BT150NP-3R3NC

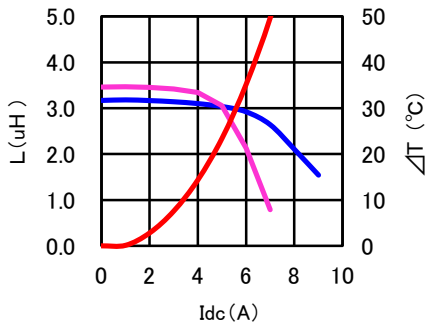


CDRH80D65BT150NP-3R9NC

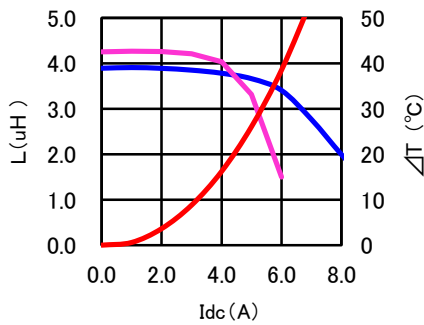


CDRH80D65BT150NP-4R7NC

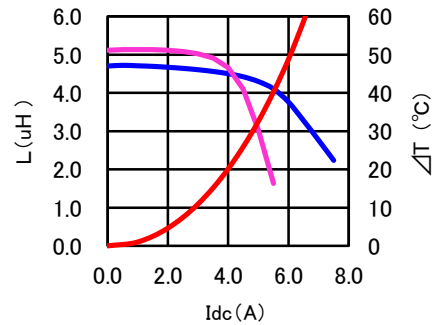


CDRH80D65BT150NP-6R8NC

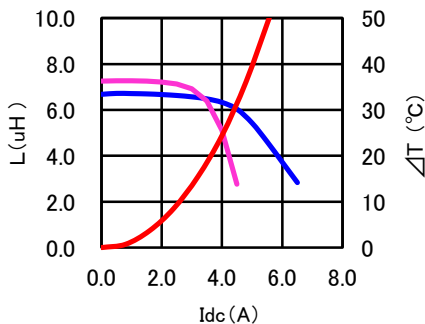

CDRH80D65BT150NP-100MC

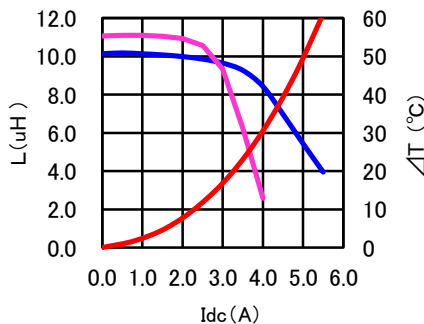

CDRH80D65BT150NP-150MC

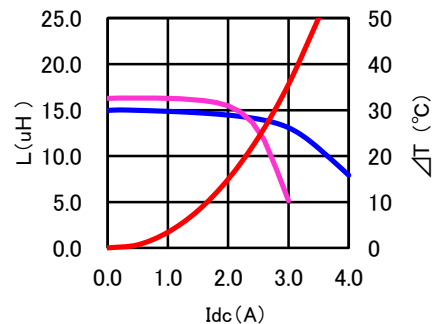


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor CDRH80D65B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT


CDRH80D65BT150NP-220MC

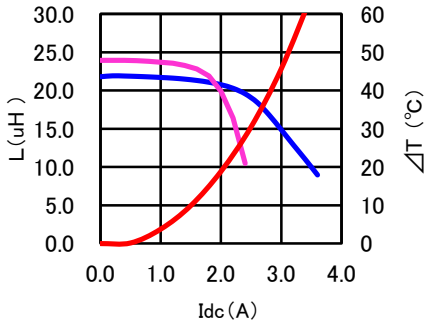


CDRH80D65BT150NP-330MC

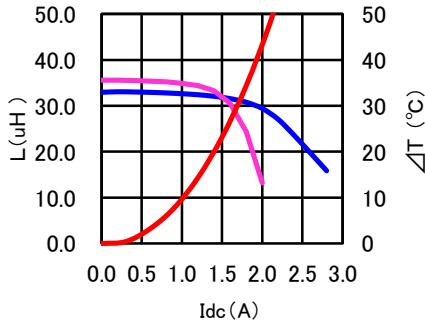


CDRH80D65BT150NP-470MC

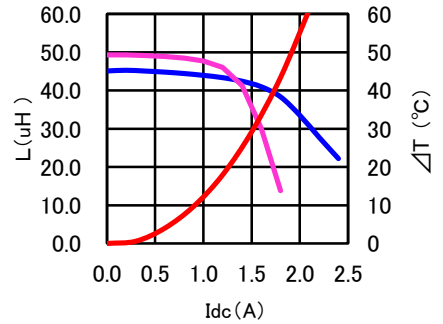


CDRH80D65BT150NP-680MC

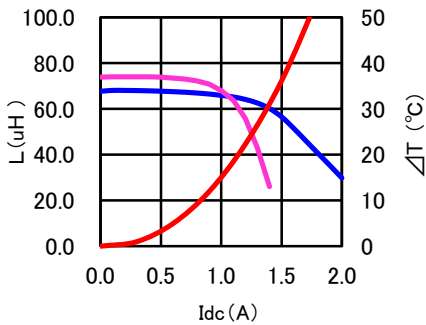


CDRH80D65BT150NP-101MC

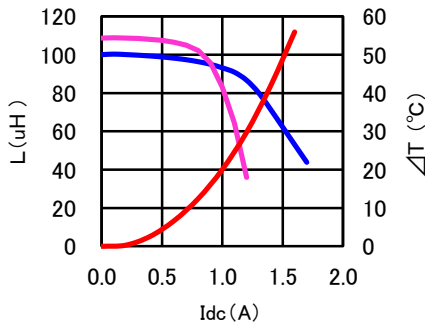


CDRH80D65BT150NP-151MC

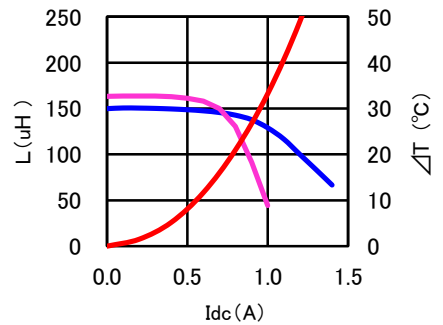


CDRH80D65BT150NP-221MC

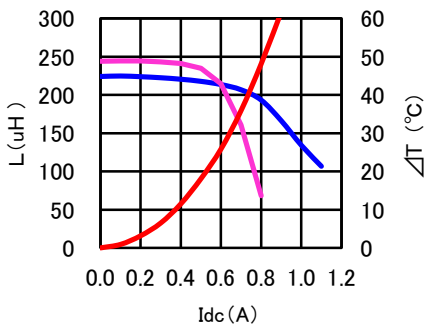

CDRH80D65BT150NP-331MC

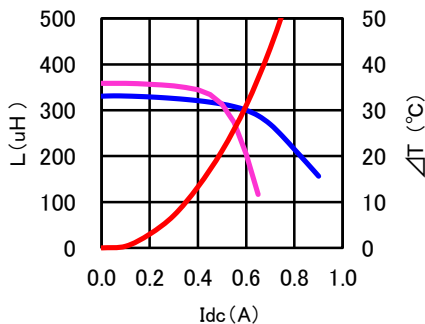

CDRH80D65BT150NP-471MC

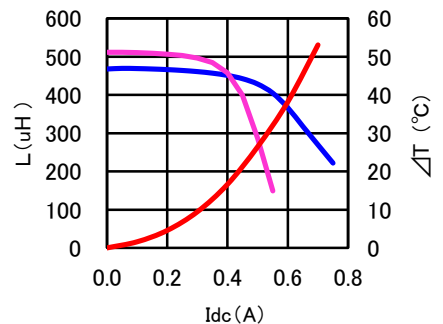


Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

SMD Power Inductor CDRH80D65B/T150




Saturation Current & Temperature Rise Graph — L (25°C) — L (150°C) — ΔT

CDRH80D65BT150NP-681MC

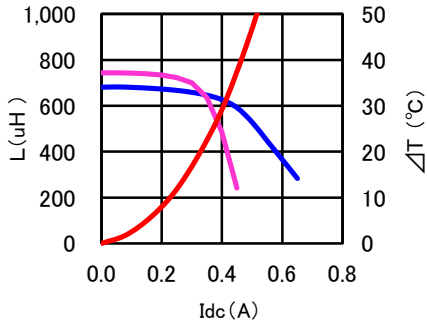

CDRH80D65BT150NP-102MC

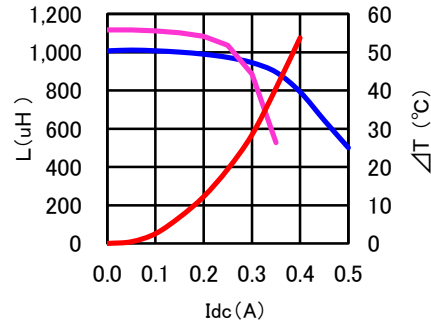

For sales office information, please [click here](#) to visit our website.

Note : This specification is subject to change without notice. Please contact your nearest sales office for updated information when placing an order.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Sumida](#) manufacturer:

Other Similar products are found below :

[CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#)