



Platinum Temperature Sensors

6W – Product Series

Temperature Range: –200°C...+600°C

Platinum temperature sensors elements with wire connections

Technical Data

Specification:	DIN EN 60751	
Temperature range:	-200°C to +600°C	
Temperature Coefficient:	TCR = 3850 ppm/K	
Tolerance Classes:	F 0.1 (Class Y)	-50°C to +150°C
	F 0.15 (Class A)	-90°C to +300°C
	F 0.3 (Class B)	-200°C to +600°C
	F 0.6 (Class C)	-200°C to +600°C
	1/5 F 0.3 (Class K)	on request
	1/10 F 0.3 (Class K)	on request
Leads:	Platinum-coated nickel wire ($\varnothing = 0.2$ mm) Recommended connection technology: Soldering, Welding, Crimping	
Lead Lengths:	7/10/15 mm	
Long-term stability:	Max. Drift = Less than 0.03% after 1000h at max. operating temperature	
Note:	Other connection lengths on request	



INNOVATIVE SENSOR TECHNOLOGY


ISTAG, Industriestrasse 2, CH-9630 Wattwil, Switzerland, Phone (+)41 71 987 73 73, Fax (+)41 71 987 73 77
e-mail info@ist-ag.com, www.ist-ag.com

6W – Product Series

Temperature Range: $-200^{\circ}\text{C} \dots +600^{\circ}\text{C}$


6W 161

Chip Dimensions, L x W:	1.6 x 1.2 mm	
Nominal Resistance at 0°C (ohm) :	100/500/1000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 8.3$ at 0°C $\Delta T_a = 56$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.05$ $T_{0.63} = 0.08$ $T_{0.9} = 0.18$ $T_{0.5} = 1$ $T_{0.63} = 1.2$ $T_{0.9} = 2.5$
Measuring Current (mA):	100 Ω : 1 500 Ω : 0.5 1000 Ω : 0.3	

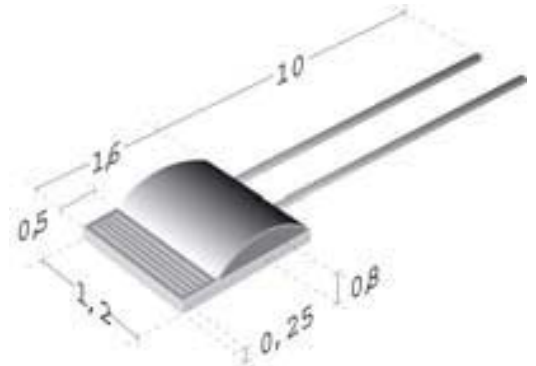

7W 161

Chip Dimensions, L x W:	1.6 x 1.2 mm	
Nominal Resistance at 0°C (ohm) :	100/1000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 8.3$ at 0°C $\Delta T_a = 56$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.05$ $T_{0.63} = 0.08$ $T_{0.9} = 0.18$ $T_{0.5} = 1$ $T_{0.63} = 1.2$ $T_{0.9} = 2.5$
Measuring Current (mA):	100 Ω : 1 1000 Ω : 0.3	
Note:	Pure platinum wire, 0.2 mm diameter	

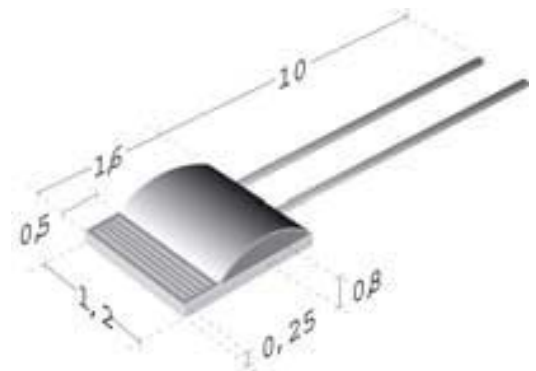

INNOVATIVE SENSOR TECHNOLOGY

6W – Product Series

Temperature Range: $-200^{\circ}\text{C} \dots +600^{\circ}\text{C}$


7W 308

Dimensions, LxW:	3.0 x 0.8 mm	
Nominal Resistance at 0°C (ohm):	100/500/1000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 6.7$ at 0°C $\Delta T_a = 46$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.08$ $T_{0.63} = 0.10$ $T_{0.9} = 0.25$ $T_{0.5} = 1.2$ $T_{0.63} = 1.5$ $T_{0.9} = 3.5$
Measuring Current (mA):	100 Ω : 1 500 Ω : 0.5 1000 Ω : 0.3	
Note:	Pure platinum wire, 0.15 mm diameter	



6W 202

Dimensions, LxW:	2.0 x 2.0 mm	
Nominal Resistance at 0°C (ohm):	100/500/1000/2000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 3.1$ at 0°C $\Delta T_a = 31$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.11$ $T_{0.63} = 0.16$ $T_{0.9} = 0.38$ $T_{0.5} = 3.6$ $T_{0.63} = 4.9$ $T_{0.9} = 10.2$
Measuring Current (mA):	100 Ω : 1 500 Ω : 0.5 1000 Ω : 0.3 2000 Ω : 0.2	

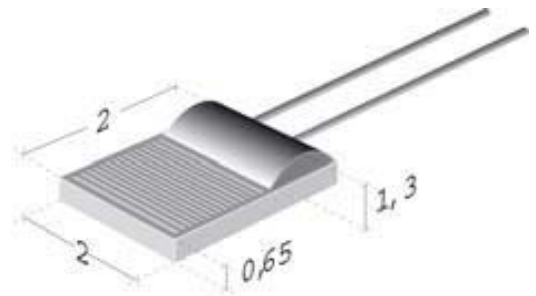


INNOVATIVE SENSOR TECHNOLOGY

6W – Product Series

Temperature Range: $-200^{\circ}\text{C} \dots +600^{\circ}\text{C}$


6W 216

Dimensions, LxW:	2.5 x 1.6 mm	
Nominal Resistance at 0°C (ohm):	100/1000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 2.8$ at 0°C $\Delta T_a = 28$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.12$ $T_{0.63} = 0.18$ $T_{0.9} = 0.42$ $T_{0.5} = 4$ $T_{0.63} = 5.4$ $T_{0.9} = 11$
Measuring Current (mA):	100 Ω : 1 1000 Ω : 0.3	

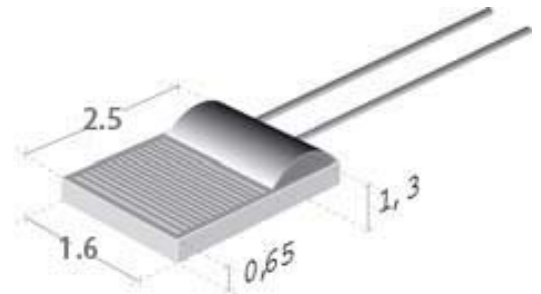

6W 232

Dimensions, LxW:	2.3 x 2.0 mm	
Nominal Resistance at 0°C (ohm):	100/500/1000/2000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 2.5$ at 0°C $\Delta T_a = 25$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.15$ $T_{0.63} = 0.2$ $T_{0.9} = 0.55$ $T_{0.5} = 4.5$ $T_{0.63} = 6$ $T_{0.9} = 12$
Measuring Current (mA):	100 Ω : 1 500 Ω : 0.5 1000 Ω : 0.3 2000 Ω : 0.2	

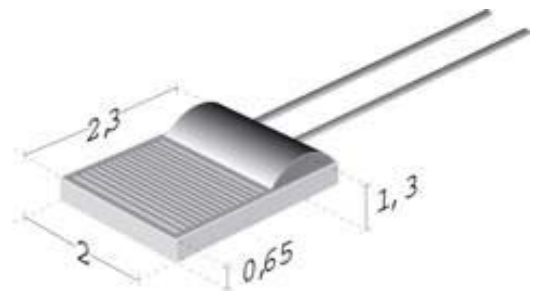


INNOVATIVE SENSOR TECHNOLOGY

6W – Product Series

Temperature Range: $-200^{\circ}\text{C} \dots +600^{\circ}\text{C}$


6W 516

Dimensions, LxW:	5.0 x 1.6 mm	
Nominal Resistance at 0°C (ohm):	100/1000/2000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 1.3$ at 0°C $\Delta T_a = 14$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.25$ $T_{0.63} = 0.3$ $T_{0.9} = 0.7$ $T_{0.5} = 5.5$ $T_{0.63} = 7.5$ $T_{0.9} = 16$
Measuring Current (mA):	100 Ω : 1 1000 Ω : 0.3 2000 Ω : 0.2	

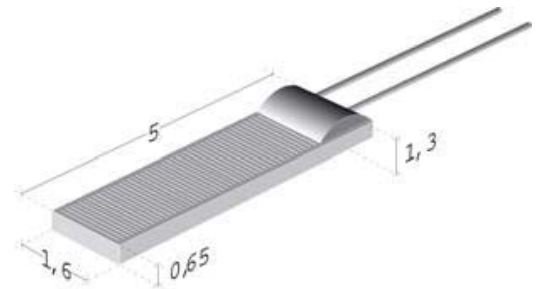

6W 520

Dimensions, LxW:	5.0 x 2.0 mm	
Nominal Resistance at 0°C (ohm):	100/500/1000/ 10,000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 1.3$ at 0°C $\Delta T_a = 14$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.25$ $T_{0.63} = 0.3$ $T_{0.9} = 0.75$ $T_{0.5} = 6$ $T_{0.63} = 8.5$ $T_{0.9} = 18$
Measuring Current (mA):	100 Ω : 1 500 Ω : 0.5 1000 Ω : 0.3 10,000 Ω : 0.1	

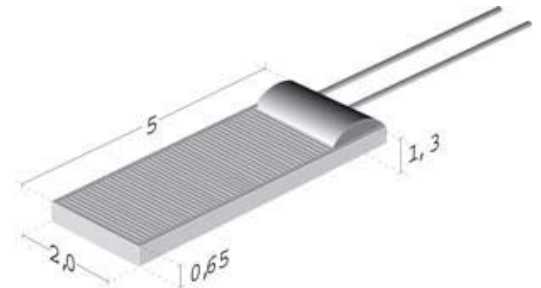


INNOVATIVE SENSOR TECHNOLOGY

6W – Product Series

Temperature Range: $-200^{\circ}\text{C} \dots +600^{\circ}\text{C}$


6W 538

Dimensions, LxW:	5.0 x 3.8 mm	
Nominal Resistance at 0°C (ohm):	100/1000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 0.7$ at 0°C $\Delta T_a = 10$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.35$ $T_{0.63} = 0.4$ $T_{0.9} = 0.9$ $T_{0.5} = 7.5$ $T_{0.63} = 10$ $T_{0.9} = 20$
Measuring Current (mA):	100 Ω : 1 1000 Ω : 0.3	

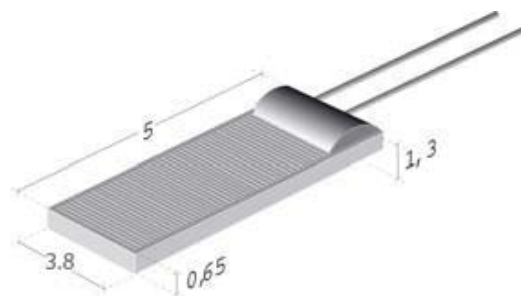

6W 102

Dimensions, LxW:	10.0 x 2.0 mm	
Nominal Resistance at 0°C (ohm):	100/500/1000	
Self Heating (mK):	Water (v= 0 m/s) Air (v= 0 m/s)	$\Delta T_w = 0.7$ at 0°C $\Delta T_a = 10$ at 0°C
Response Time (s):	Water (v= 0.4 m/s) Air (v= 1 m/s)	$T_{0.5} = 0.33$ $T_{0.63} = 0.4$ $T_{0.9} = 0.85$ $T_{0.5} = 7.5$ $T_{0.63} = 10.5$ $T_{0.9} = 20$
Measuring Current (mA):	100 Ω : 1 500 Ω : 0.5 1000 Ω : 0.3	

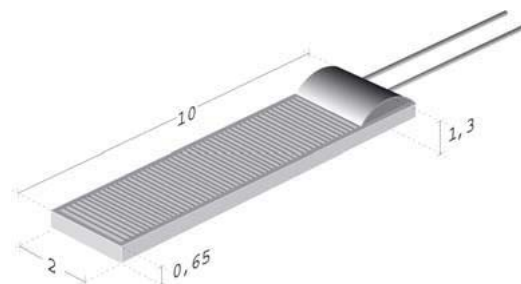

INNOVATIVE SENSOR TECHNOLOGY



Platinum Temperature Sensors

TEMPERATURE

6W – Product Series

Temperature Range: $-200^{\circ}\text{C} \dots +600^{\circ}\text{C}$

Order Example: **P** **1K0.** **232.** **6** **W.** **B.** **010**
 1 2 3 4 5 6 7

1. *Material Identification = Platinum temperature sensor*
2. *Resistance Value in ohm = $1000\Omega / 0^{\circ}\text{C}$*
3. *Chip Dimension = $2.3 \times 2.0 \text{ mm}$*
4. *Temperature Range = -200°C to $+600^{\circ}\text{C}$*
5. *Extension = Wire Connections*
6. *Tolerance Class = DIN EN 60751 F 0.3 (former Class B)*
7. *Connection length = 10 mm*



INNOVATIVE SENSOR TECHNOLOGY

IST AG, Industriestrasse 2, CH-9630 Wattwil, Switzerland, Phone (+)41 71 987 73 73, Fax (+)41 71 987 73 77
e-mail info@ist-ag.com, www.ist-ag.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board Mount Temperature Sensors](#) category:

Click to view products by [1st Innovative Sensor](#) manufacturer:

Other Similar products are found below :

[5962-8757102XA](#) [66F115](#) [MCP9808-EMS](#) [MCP98242T-BEMNY](#) [MCP9843T-BEMC](#) [EMC1063-1-ACZL-TR](#) [NCT218FCT2G](#)
[O53GAB175A-160Y](#) [OH10/62,112](#) [3610085020002](#) [389049M9527](#) [TC622EAT](#) [TC6501P095VCTTR](#) [TC6501P105VCTTR](#)
[TC6501P125VCTTR](#) [MCP9802A0T-M/OT](#) [MCP9803T-M/SN](#) [MCP9843-BEST](#) [TC6501P115VCTTR](#) [TC6502P065VCTTR](#)
[ADM1023ARQZ-REEL](#) [ADM1024ARUZ-REEL](#) [ADM1032ARMZ-1RL](#) [AT30TS74-U1FMBB-T](#) [AT30TS74-U1FMAB-T](#) [AT30TS74-](#)
[U1FMCB-T](#) [AT30TS74-U1FMDB-T](#) [ADT7483AARQZ-RL](#) [ADT7481ARMZ-REEL](#) [ADT7463ARQZ-REEL](#) [MCP98243T-BEMNY](#)
[MCP98243T-BE/MC](#) [66L080-0226](#) [MAX31820MCR+T](#) [MAX1452CAEC8H](#) [DS1780E](#) [TMP05BKSZ-REEL7](#) [5962-8757103XA](#) [WTK-14-](#)
[36/N](#) [E52-CA6D-N 4M](#) [MCP98244T-BEMNY](#) [MCP9802A5T-MOT](#) [MAX6581TG9A+T](#) [DS75S-C11+T&R](#) [S-58LM20A-I4T1U](#)
[MAX6501UKP120+T](#) [MCP98243T-BE/ST](#) [AT30TS01-MAA5M-T](#) [NCT375DR2G](#) [DS18S20-SL+T&R](#)