

# PIN Power Inductor RCR1010



## Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 10.5 × 10.5 × 10.5mm Max.
- Product weight: 2.9 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Environmental Data

- Operating temperature range: -40°C ~ +85°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +85°C


## Packaging

- Box packaging.


## Applications


- Ideally used in Printers, LCD TV, DVD, Copy Machine, Mainboard of the compounding machines etc. as DC-DC Converter inductors.

## Dimension - [mm]

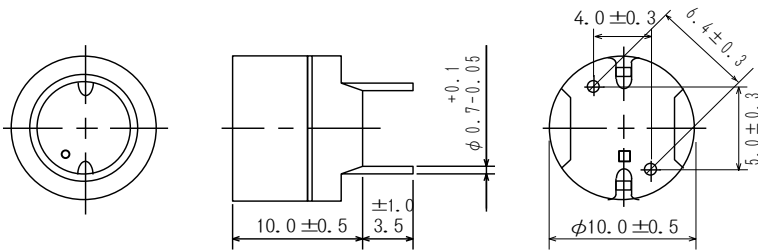

## Schematics - [mm]



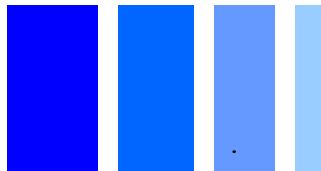

### Electrical Characteristics

Part Name	Stamp	Inductance ( $\mu\text{H}$ ) [Within] ※1	D.C.R. (m $\Omega$ ) Max. (Typ.) (at 20°C)	Saturation Current (A) ※2		Temperature Rise current (A) ※3
				(at 20°C)	(at 105°C)	
RCR1010NP-100M	100M	10 $\mu\text{H} \pm 20\%$	25.1(20.1)	4.8	3.8	4.3
RCR1010NP-120M	120M	12 $\mu\text{H} \pm 20\%$	26.6(21.3)	4.5	3.5	4.2
RCR1010NP-150M	150M	15 $\mu\text{H} \pm 20\%$	31.3(25.1)	4.0	3.2	4.1
RCR1010NP-180M	180M	18 $\mu\text{H} \pm 20\%$	33.8(27.1)	3.8	2.9	4.0
RCR1010NP-220M	220M	22 $\mu\text{H} \pm 20\%$	38.3(30.6)	3.4	2.6	3.8
RCR1010NP-270M	270M	27 $\mu\text{H} \pm 20\%$	40.9(32.7)	3.0	2.5	3.6
RCR1010NP-330M	330M	33 $\mu\text{H} \pm 20\%$	53.8(43.1)	2.7	2.2	3.2
RCR1010NP-390M	390M	39 $\mu\text{H} \pm 20\%$	73.4(58.7)	2.5	2.0	2.5
RCR1010NP-470M	470M	47 $\mu\text{H} \pm 20\%$	102.1(81.7)	2.2	1.8	2.2
RCR1010NP-560M	560M	56 $\mu\text{H} \pm 20\%$	111.3(89.0)	2.1	1.7	2.1
RCR1010NP-680M	680M	68 $\mu\text{H} \pm 20\%$	137.5(110.0)	1.8	1.4	1.9
RCR1010NP-820M	820M	82 $\mu\text{H} \pm 20\%$	160.0(128.0)	1.7	1.3	1.8
RCR1010NP-101M	101M	100 $\mu\text{H} \pm 20\%$	175.3(140.2)	1.5	1.2	1.7
RCR1010NP-121M	121M	120 $\mu\text{H} \pm 20\%$	193.8(155.0)	1.4	1.1	1.6
RCR1010NP-151M	151M	150 $\mu\text{H} \pm 20\%$	225.6(180.5)	1.2	1.0	1.5
RCR1010NP-181M	181M	180 $\mu\text{H} \pm 20\%$	275.3(220.2)	1.1	0.9	1.4
RCR1010NP-221M	221M	220 $\mu\text{H} \pm 20\%$	313.0(250.5)	1.0	0.8	1.3
RCR1010NP-271M	271M	270 $\mu\text{H} \pm 20\%$	450.6(360.5)	0.95	0.74	1.0
RCR1010NP-331M	331M	330 $\mu\text{H} \pm 20\%$	500.6(400.5)	0.88	0.64	0.98
RCR1010NP-391M	391M	390 $\mu\text{H} \pm 20\%$	563.0(450.5)	0.78	0.60	0.94
RCR1010NP-471M	471M	470 $\mu\text{H} \pm 20\%$	748.8(599.0)	0.72	0.58	0.80
RCR1010NP-561M	561M	560 $\mu\text{H} \pm 20\%$	848.8(682.9)	0.68	0.55	0.75
RCR1010NP-681M	681M	680 $\mu\text{H} \pm 20\%$	1202(962.0)	0.60	0.48	0.63
RCR1010NP-821M	821M	820 $\mu\text{H} \pm 20\%$	1342(1074)	0.57	0.45	0.60
RCR1010NP-102M	102M	1.0mH $\pm 20\%$	1490(1192)	0.48	0.39	0.55

※1. Inductance measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 80% of it's nominal value.













※3. Temperature rise current: The value of D.C. current when the temperature rise is  $\Delta t = 40^\circ\text{C}$  ( $T_a = 20^\circ\text{C}$ ).

# PIN Power Inductor RCR1010



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

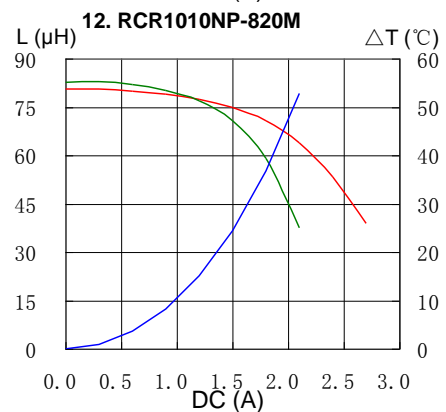
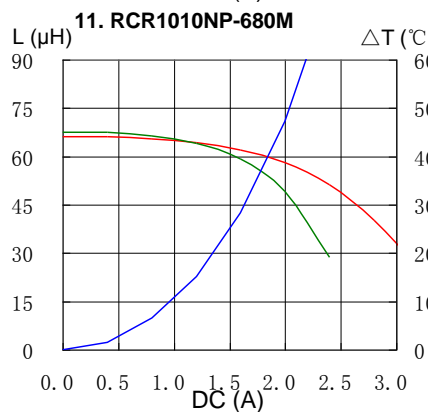
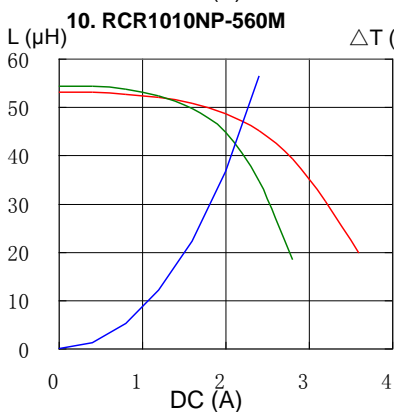
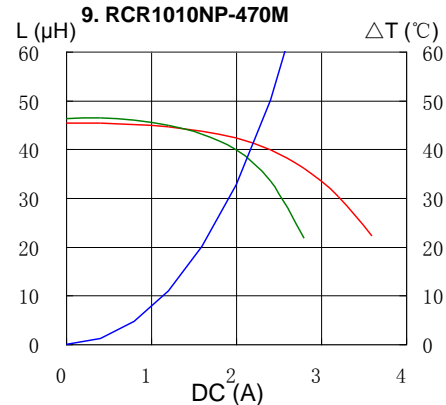
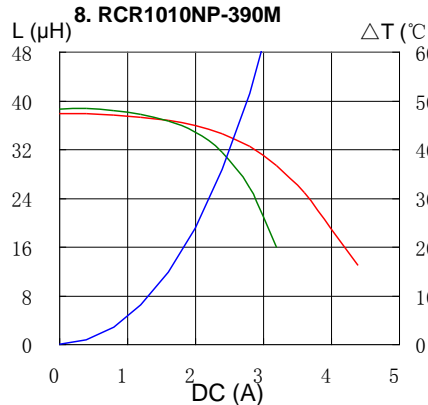
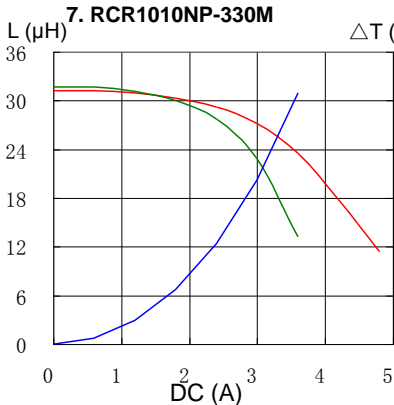
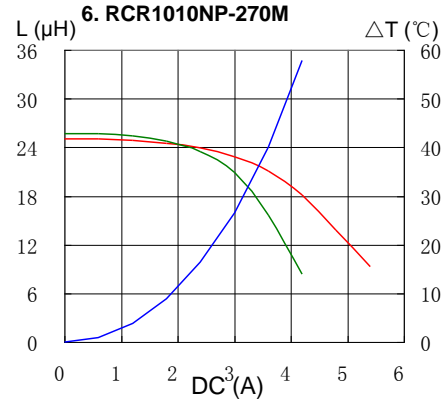
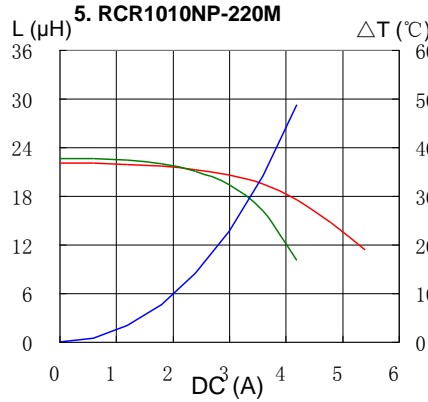
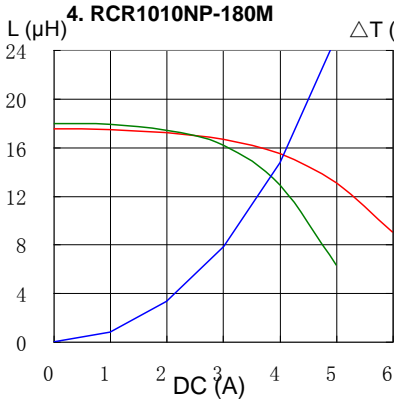
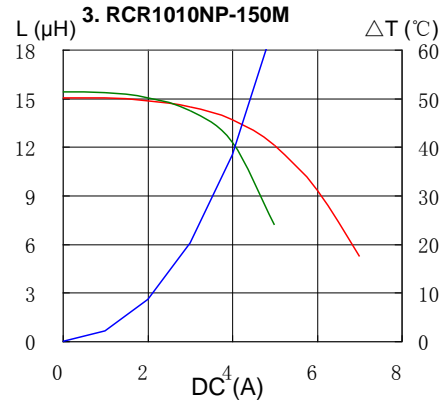
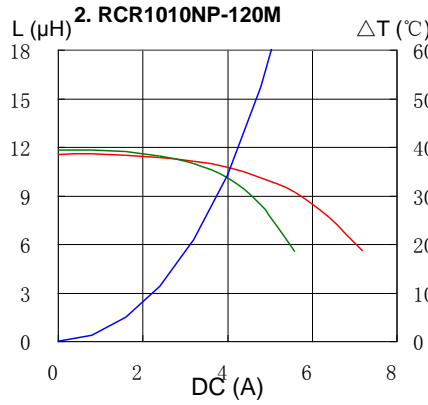
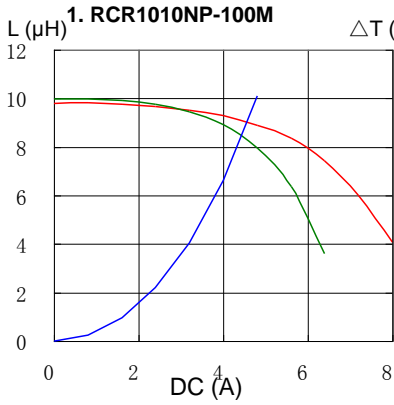


# PIN Power Inductor RCR1010



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

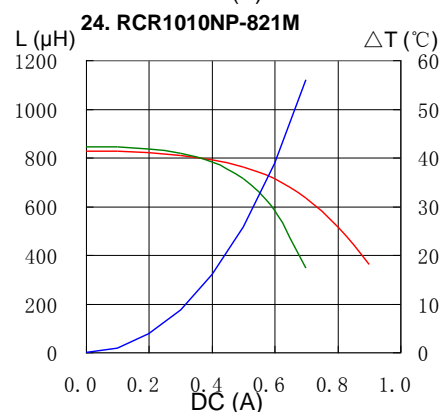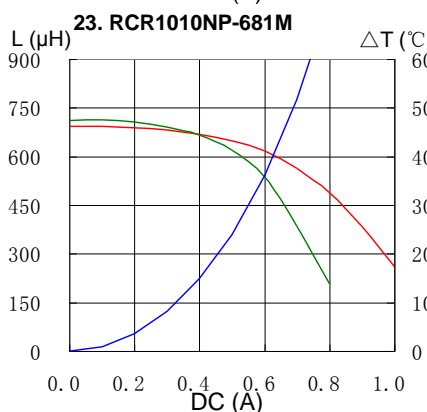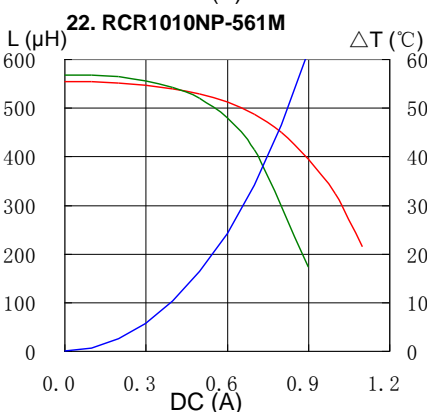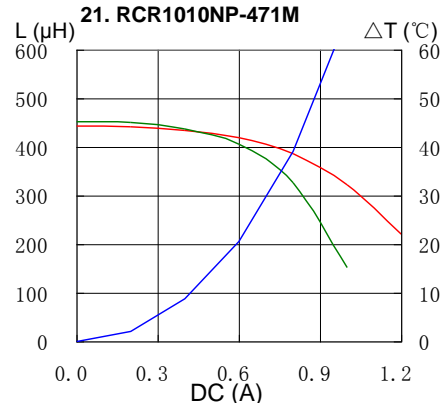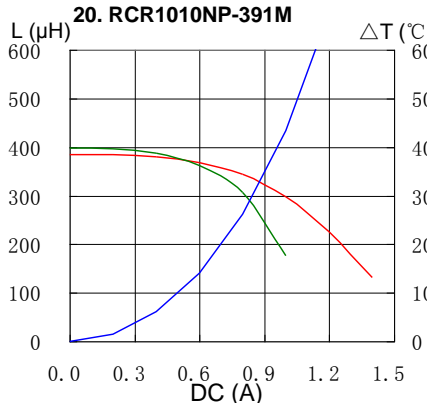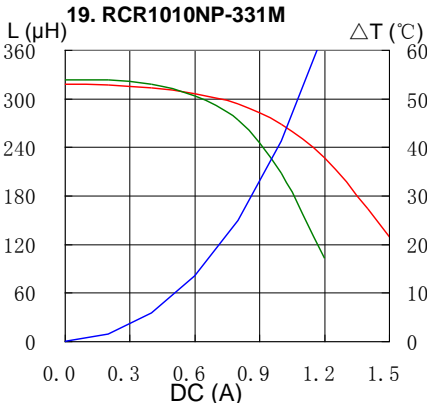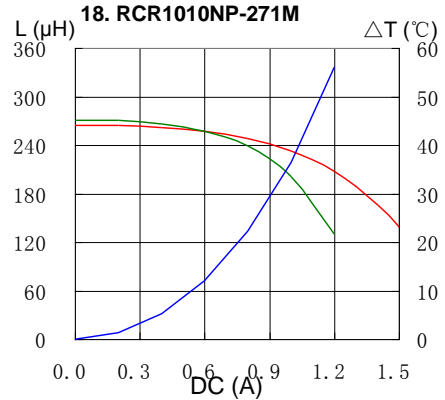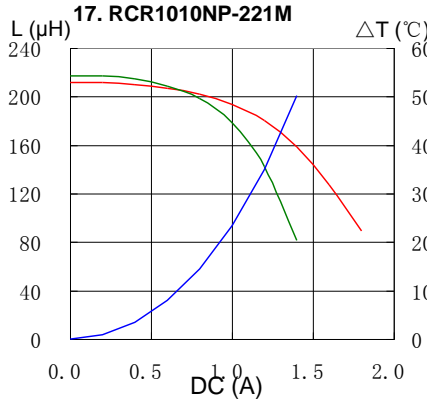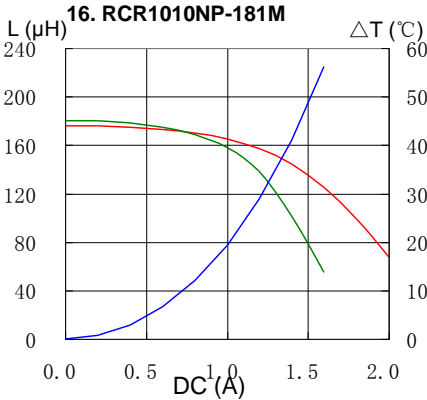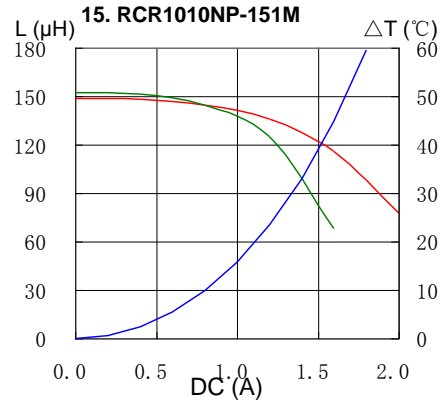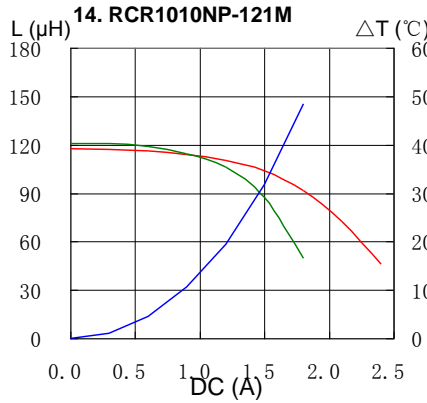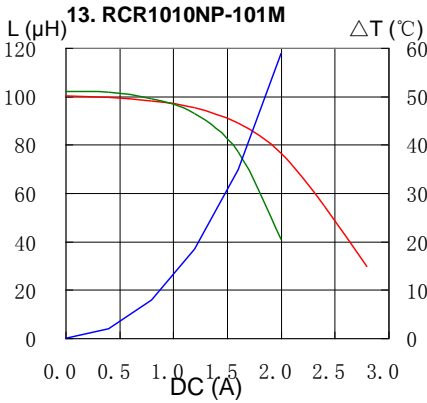


# PIN Power Inductor RCR1010



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

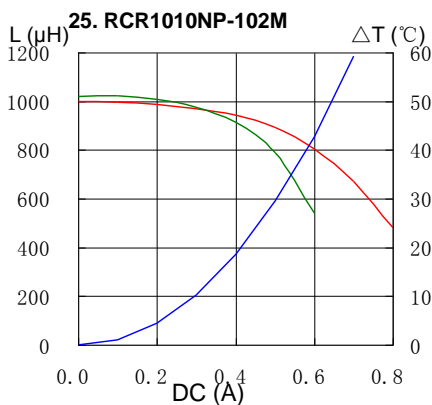

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Sumida](#) manufacturer:*

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)  
[PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#)  
[9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)  
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)  
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)  
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)