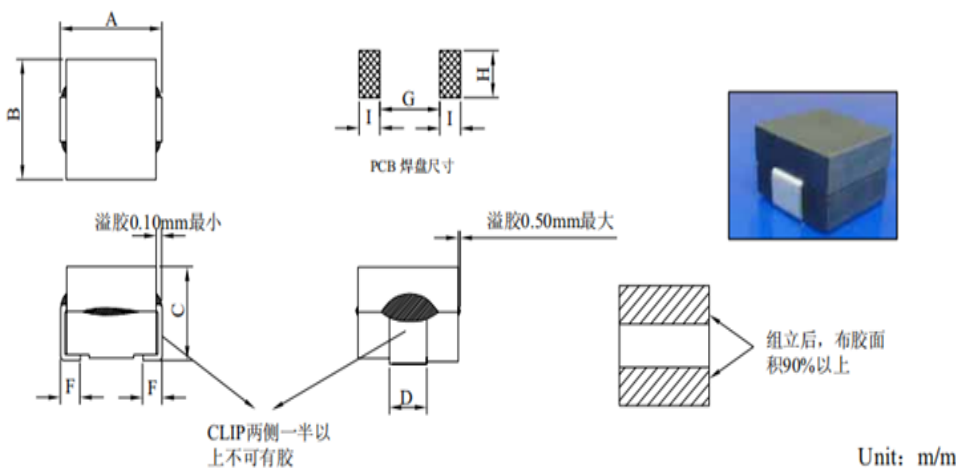


**◆ Features**

- 1、High-current SMD inductor.
- 2、Low-profile design.
- 3、High output processing capacity: Minimal copper loss
- 4、High saturation current and low DC resistance.
- 5、High operating frequency

**◆ Dimensions**


A	13.5	Max
B	13.0	Max
C	8.0	Max
D	5.0	± 0.3
F	2.5	± 0.2
G	7.11	REF
H	7.62	REF
I	3.2	REF

**◆ Specification**

Part Number	Inductance @100KHz, 1 V (μH)	DC Resistance	Saturation Current(A)	Heat Rating Current (A)
		±30% (Ω) DCR	Isat	Irms
SLA1408 Series				
SLA1408SR21MTT	0.21±20%	0.35	79	71
SLA1408SR26MTT	0.26±20%	0.37	66	60
SLA1408SR32MTT	0.32±20%	0.39	58	50
SLA1408SR44MTT	0.44±20%	0.42	43	35

**◆ Standard Packing Quantity: 450 pcs/reel**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Sunltech](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR54NP-470LC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#)  
[MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-53601NL](#) [PE-53602NL](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#)  
[1206CS-471XJ](#) [HC2-R47-R](#) [HC8-1R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCP1317NP-391L](#)  
[RCR110DNP-331L](#) [DH2280-4R7M](#) [DS1608C-106](#) [B10TJ](#) [B82498B3101J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#) [1812CS-183XJ](#) [1812CS-](#)  
[223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#) [1812LS-563XJ](#) [1812LS-683XJ](#)  
[1812LS-824XJ](#) [NIN-FB101JTR110F](#) [NIN-FB471JTR62F](#) [NIN-FC1R5JTR220F](#) [NIN-HCR15JTRF](#) [NIN-HCR33JTRF](#) [NIN-HDR22JTRF](#)