

## Wire Wound SMD Power Inductor



### ◆ Features

- 1、Magnetic-resin shielded construction reduces buzz noise to ultra-low levels;
- 2、Metallization on ferrite core results in excellent shock resistance and damage-free durability;
- 3、Closed magnetic circuit design reduces leakage flux and Electro Magnetic Interference (EMI);
- 4、30% higher current rating than conventional inductors of equal size;
- 5、Take up less PCB real estate and save more power.



### ◆ Applications


- 1、LED Lighting;
- 2、Mobile devices with multifunction such as adding color TV and camera;
- 3、Flat-screen TVs, blue-ray disc recorders, set top boxes;
- 4、Notebooks, desktop computers, servers, graphic cards;
- 5、Portable gaming devices, personal navigation systems, personal multimedia devices;
- 6、Automotive systems
- 7、Telecomm base stations

### ◆ Lead Free Part Numbering


**SLW 5012 S 100 M S T**  
**(1) (2) (3) (4) (5) (6) (7)**

- (1) Series Type
- (2) Dimension: L X H
- (3) Material Code
- (4) Inductance: 2R2=2.2μH ;  
100=10μH; 101=100μH
- (5) Inductance Tolerance: M=±20%, N=±30%
- (6) Company Code
- (7) Packaging : Tape Carrier Package

### ◆ Dimensions

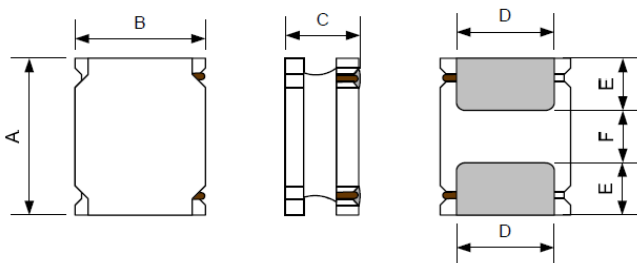

Recommended Land Pattern




Unit:mm

Series	A	B	C	D	E	F	a Typ.	b Typ.	c Typ.
SLW5012S	5.0±0.2	5.0±0.2	1.2Max.	4.0±0.2	1.25±0.2	2.50±0.2	2.3	1.4	4.2

## ◆ Electrical Characteristics

- 1) Operating and storage temperature range (individual chip without packing): cking):  $-25^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 2) Storage temperature range (packaging conditions):  $-10^{\circ}\text{C} \sim +40^{\circ}\text{C}$  and RH 70% (Max.)


## ◆ Construction and material

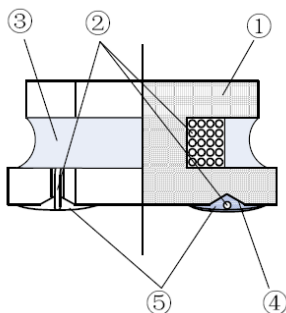


Code	Part Name	Material Name
①	Ferrite Core	Ni-Zn Ferrite
②	Wire	Polyurethane system enameled copper wire
③	Magneic Glue	Epoxy resin and magnetic powder
④	Plating Electrodes	Ag
		Ni
		Sn
⑤	Outer Electrodes	Top surface solder coating Sn、Ag、Cu

## ◆ REFLOW-PROFILE

**Limit Profile**

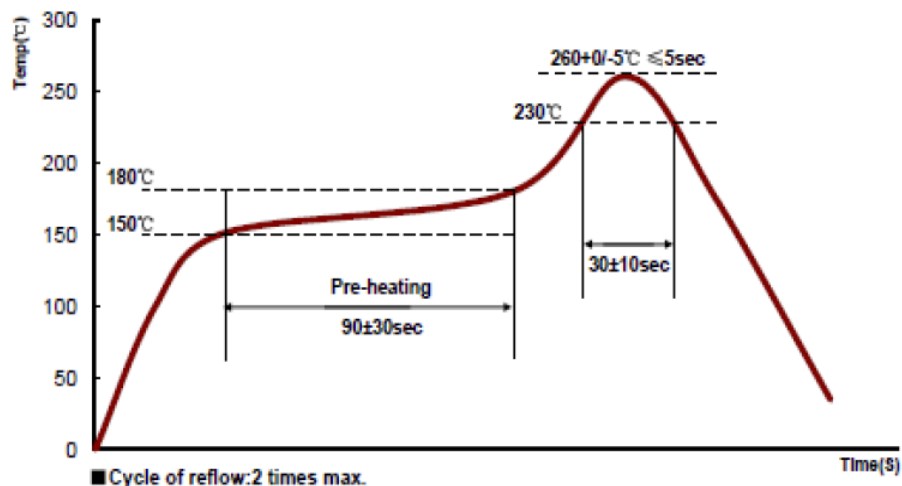

**Standard Profile (for EOC Solder paste S70G-HF)**

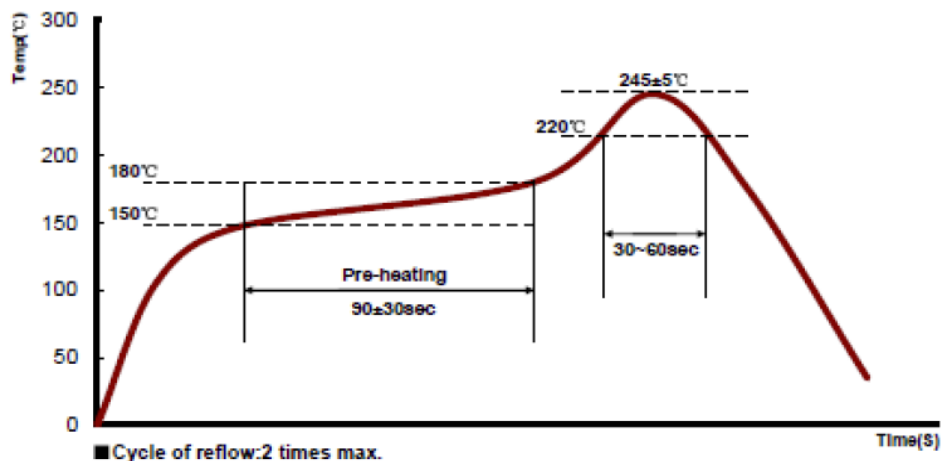

## ◆ Specification

Part Number	Inductance @100KHz,1 V (μH)	DC Resistance ±30% (Ω)	Min.Self-resonaNST Frequency (MHz)	Saturation CurreNST(A)	Heat Rating CurreNST (A)
		DCR	S.R.F	Isat	Irms
<b>SLW5012 Series</b>					
SLW5012S1R0MST	1.0±20%	0.057	103	4.40	2.90
SLW5012S1R5MST	1.5±20%	0.072	68	3.70	2.50
SLW5012S2R2MST	2.2±20%	0.085	50	3.10	2.10
SLW5012S3R3MST	3.3±20%	0.126	34	2.40	1.80
SLW5012S4R7MST	4.7±20%	0.164	31	2.20	1.65
SLW5012S6R8MST	6.8±20%	0.245	22	1.70	1.30
SLW5012S100MST	10±20%	0.344	17	1.40	1.10
SLW5012S150MST	15±20%	0.436	13	1.20	0.90

## ◆ Note


- 1: All test data is referenced to 20°C ambieNST;
- 2: Rated curreNST: Isat or Irms, whichever is smaller;
- 3: Isat: DC curreNST at which the inductance drops approximate 30% from its value without curreNST;
- 4: Irms: DC curreNST that causes the temperature rise ( $\Delta T = 40^\circ\text{C}$ ) from 20°C ambieNST.

## ◆ Standard Packing Quantity: 1000 pcs/reel


## ◆ TYPICAL ELECTRICAL CHARACTERISTICS

### SLW5012 Series

Temperature vs. DC Current Characteristics

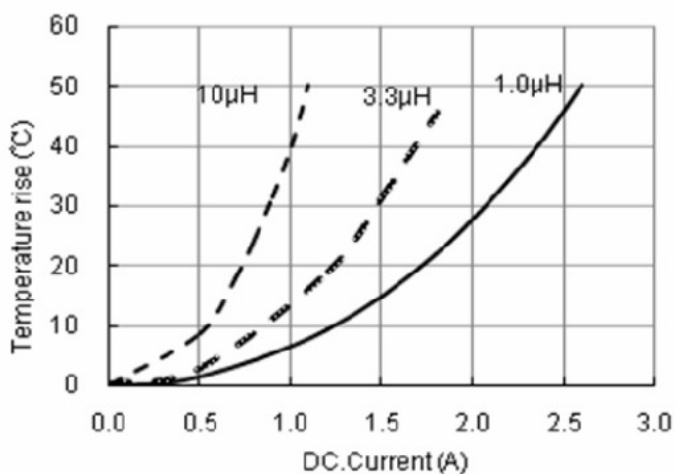

Inductance vs. DC Current Characteristics

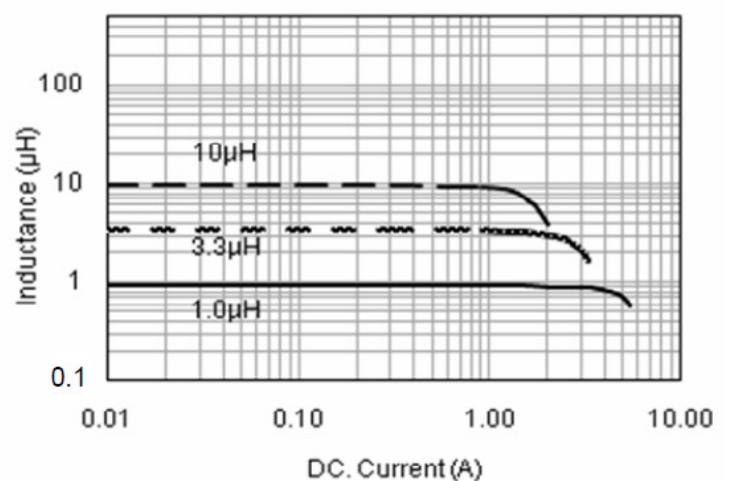

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Sunltech](#) manufacturer:*

Other Similar products are found below :

[CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#) [CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHQ1005P10NJ](#) [MHQ1005P1N0S](#) [MHQ1005P2N4S](#) [MHQ1005P3N6S](#) [MHQ1005P5N1S](#) [MHQ1005P8N2J](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53602NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9220-20](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#) [RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#)