

**VOLTAGE RANGE: 10KV**  
**CURRENT: 5.0 mA**

### Features


- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage

### Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power



### Outline Drawings : mm

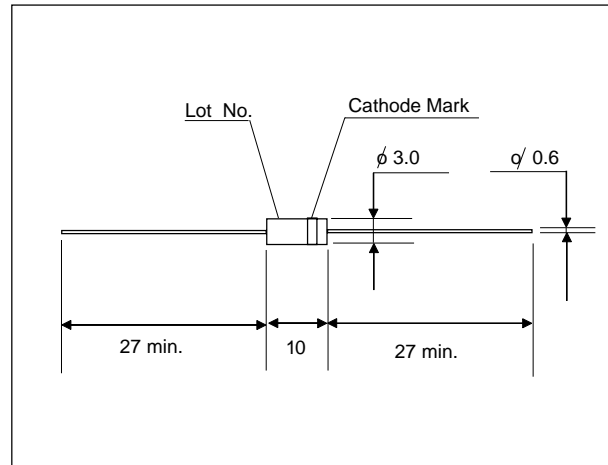

### Maximum Ratings and Electrical Characteristics T<sub>A</sub> = 25°C unless otherwise specified

Characteristic	Symbols	2CL72	Units
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	10	kV
Average Output Current T <sub>a</sub> =25°C, Resistive Load	I <sub>o</sub>	5.0	mA
Surge Current	I <sub>FSM</sub>	0.5	A
Maximum Forward Voltage Drop at 25°C, I <sub>F</sub> = I <sub>F(AV)</sub>	V <sub>F</sub>	30	V
Maximum Reverse Current at 25°C at 100°C	V <sub>RRM</sub>	2.0	uA
		5.0	uA
Maximum Reverse Recovery Time at 25°C	T <sub>rr</sub>	100	nS
Junction Capacitance at 25°C, V <sub>R</sub> =0V, f=1MHz	C <sub>j</sub>	1.0	pF
Junction Temperature	T <sub>j</sub>	125	°C
Allowable Operation Case Temperature	T <sub>c</sub>	125	°C
Storage Temperature	T <sub>stg</sub>	-40 to +125	°C

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for* [Diodes - General Purpose, Power, Switching category:](#)

*Click to view products by* [SUNMATE manufacturer:](#)

Other Similar products are found below :

[MMBD3004S-13-F](#) [RD0306T-H](#) [BAV17-TR](#) [BAV19-TR](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS181-TP](#) [1SS193,LF](#) [1SS400CST2RA](#)  
[SDAA13](#) [SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914B](#) [1N914BTR](#) [1SS226-TP](#) [RFUH20TB3S](#)  
[D291S45T](#) [BAV300-TR](#) [BAW56DWQ-7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [LL4151-GS18](#) [053684A](#)  
[SMMSD4148T3G](#) [707803H](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV199E6433HTMA1](#) [BAS28-7](#)  
[BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [RGP30D-E3/73](#) [BAV99TQ-13-F](#) [BAS21DWA-7](#)  
[BAV99HDW-13](#) [NTE6250](#) [NTE582-4](#) [NTE582-6](#) [MMDB30-E28X](#)