

VOLTAGE RANGE: 14KV
CURRENT: 5.0 mA

Features


- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage

Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power



Outline Drawings : mm

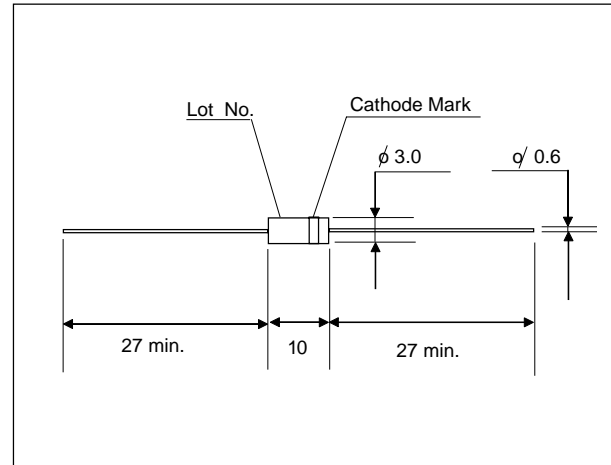

Maximum Ratings and Electrical Characteristics T_A = 25°C unless otherwise specified

Characteristic	Symbols	2CL74	Units	
Repetitive Peak Reverse Voltage	V _{RRM}	14	kV	
Average Output Current T _a =25°C, Resistive Load	I _o	5.0	mA	
Surge Current	I _{FSM}	0.5	A	
Maximum Forward Voltage Drop at 25°C, I _F = I _{F(AV)}	V _F	40	V	
Maximum Reverse Current	V _{RRM}	at 25°C	2.0	uA
		at 100°C	5.0	uA
Maximum Reverse Recovery Time at 25°C	T _{rr}	100	nS	
Junction Capacitance at 25°C, V _R =0V, f=1MHz	C _j	1.0	pF	
Junction Temperature	T _j	125	°C	
Allowable Operation Case Temperature	T _c	125	°C	
Storage Temperature	T _{stg}	-40 to +125	°C	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category:](#)

Click to view products by [SUNMATE manufacturer:](#)

Other Similar products are found below :

[MCL4151-TR3](#) [MMBD3004S-13-F](#) [RD0306T-H](#) [1N3611](#) [NTE156A](#) [NTE574](#) [NTE6244](#) [1SS193,LF](#) [1SS400CST2RA](#) [SDAA13](#)
[SHN2D02FUTW1T1G](#) [LS4151GS08](#) [1N4449](#) [1N456A](#) [1N4934-E3/73](#) [1N914BTR](#) [RFUH20TB3S](#) [D291S45T](#) [BAV300-TR](#) [BAW56DWQ-](#)
[7-F](#) [BAW75-TAP](#) [MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [LL4151-GS18](#) [SMMSD4148T3G](#) [BYW95B/A52A](#)
[NSVDAN222T1G](#) [CDSZC01100-HF](#) [LL4150-M-08](#) [1N4454-TR](#) [BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#)
[VS-HFA04SD60STR-M3](#) [NSVM1MA152WKT1G](#) [1SS388-TP](#) [RGP30D-E3/73](#) [VS-8EWF02S-M3](#) [BAV99TQ-13-F](#) [BAV99HDW-13](#)
[MMDB30-E28X](#) [IDP20C65D2XKSA1](#) [LS4148](#) [IDV15E65D2](#) [NSVM1MA152WAT1G](#) [HN4D02JU\(TE85L,F\)](#)