

Metal thin film chip resistors (precision)

RR series



Features

- Excellent characteristics in resistance tolerance, temperature coefficient of resistance, current noise, and linearity

Applications

- Any electronics applications that require accuracy and reliability such as automotive electronics, industrial test and measurement, consumer electronics and many others.




Thin film surface mount resistors

RR series

Specifications

* Stocked items: E-24 series (TCR P and Q, resistance tolerance D), other E-24 and E-96 series are made to order.

Dimensions



unit : mm


Dimension (inch)	RR0306 (0201)	RR0510 (0402)	RR0816 (0603)	RR1220 (0805)	RR1632 (1206)	RR2632 (1210)
L	0.60±0.05	1.00±0.05	1.60±0.20	2.00±0.20	3.20±0.20	3.20±0.20
W	0.30±0.05	0.50±0.05	0.80±0.20	1.25±0.20	1.60±0.20	2.60±0.20
A	0.12±0.05	0.20±0.10	0.30±0.20	0.40±0.20	0.50±0.20	0.50±0.20
B	0.12±0.05	0.25±0.05	0.30±0.20	0.40±0.20	0.45±0.20	0.45±0.20
T	0.23±0.03	0.35±0.05	0.40±0.10	0.40±0.10	0.40±0.10	0.40±0.10

Electrical characteristics

Series name	RR0306	RR0510	RR0816	RR1220	RR1632	RR2632
power	1/20W	1/16W	1/16W	1/10W	1/8W	1/4W
E series offered	E-24		E-24, E-96			
Resistance range (Ω)	10~30	33~22k	10~91	100~100k	10~91	100~360k
Resistance tolerance (%)	±0.1% (B)	—	—	—	—	—
	±0.5% (D)	○	○	○	○	○
	±1.0% (F)	○	—	—	—	—
Temperature coefficient of resistance (ppm/°C)	±5 (V)	—	—	—	—	○
	±10 (N)	—	—	—	—	○
	±25 (P)	—	○	—	○	○
	±50 (Q)	—	—	○	—	○
	±100 (R)	○	—	—	—	—
Maximum voltage	15V	25V	75V	100V	150V	200V
Operating temperature	-55°C ~ 125°C					
Packaging	5,000pcs	—	—	—	—	—
	10,000pcs	—	○	—	—	—

Contact us for the jumper resistor in RR0816 size (part number: RL0816-JMP)

Part numbering system

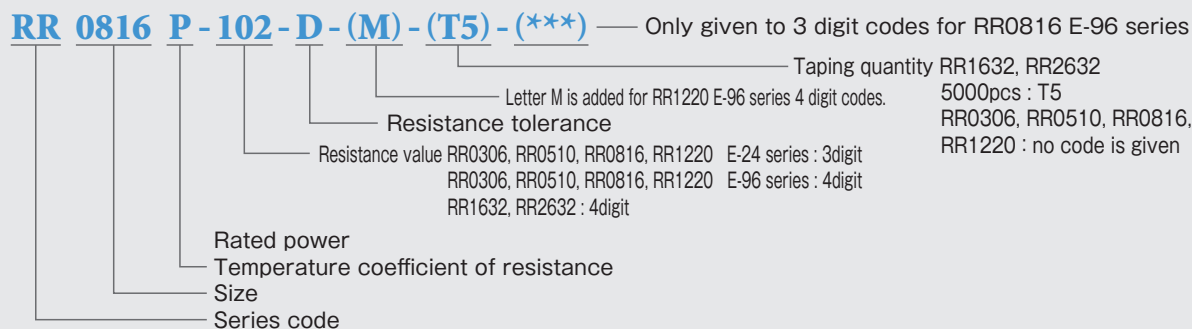

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thin Film Resistors - SMD category](#):

Click to view products by [Susumu manufacturer](#):

Other Similar products are found below :

[M55342K06B34E0RT3](#) [D55342E07B379BR-TR](#) [AR02BTC1872](#) [AR02BTC18R7](#) [AR02BTC3830](#) [AR02BTC4220](#) [AR02BTC4422](#)
[AR02BTC5100](#) [AR02BTC5111](#) [AR02BTC5762](#) [AR02BTC8251](#) [AR02BTC8452](#) [AR03BTC0110](#) [AR03BTC0120](#) [AR03BTC0330](#)
[AR03BTC0390](#) [AR03BTC1102](#) [AR03BTC1103](#) [AR03BTC1201](#) [AR03BTC2000](#) [AR03BTC2201](#) [AR03BTC2203](#) [AR03BTC2490](#)
[AR03BTC3003](#) [AR03BTC3302](#) [AR03BTC3901](#) [AR03BTC4220](#) [AR03BTC4223N](#) [AR03BTC5602](#) [AR03BTC5603](#) [AR03BTC5900](#)
[AR03BTC7500](#) [AR03BTC9100](#) [AR03BTC9103](#) [AR03BTC9760](#) [AR05BTC0280](#) [AR05BTC1000](#) [AR05BTC1100](#) [AR05BTC1201](#)
[AR05BTC1202](#) [AR05BTC1300](#) [AR05BTC14R3](#) [AR05BTC1500](#) [AR05BTC1523](#) [AR05BTC1620](#) [AR05BTC1622](#) [AR05BTC1623](#)
[AR05BTC1760](#) [AR05BTC1800](#) [AR05BTC1823](#)