

314DI Audio Stix™

NEW PRODUCT BULLETIN 623

AudioStix™adding to the line

An addition has been added to the popular AudioStix™ line of premium pro audio products. The 314DI is a pocket size version of Switchcraft's standard high quality DI Box series of products.

Converts the unbalanced outputs of guitars, keyboards and other instruments with line-out level to balanced, mic level signals that can be connected to audio consoles and mic pre-amps.

FEATURES & BENEFITS

- 1/4" Feed Thru – allows for connection to multiple devices such as an amp and a tuner; two amps and much more.
- Switchcraft DE Series Locking Male XLR provides balanced, mono, mic level output
- Ground Lift Switch
- -20db pad to enable the device to handle stronger signals without distortion



Switchcraft®


314DI Audio Stix™

NEW PRODUCT BULLETIN 623

314DI Active Instrument Direct Box Audio Specifications

Switchcraft®

Parameter	Performance	Conditions
Frequency Response	15Hz - 40kHz	+/-0.3dB, ref 1kHz
Total Harmonic Distortion + Noise	< 0.009%	at 1kHz, +4dBu Input, 22kHz Bandwidth
Maximum Input Level	+12.5dBu +23dBu	at 20Hz with 1% THD+Noise With 20dB Pad Engaged
Input Impedance	> 120kΩ	at 1kHz
Output Impedance	< 45Ω	at 1kHz
Deviation from Linear Phase	≤ 1°	at 1kHz
Voltage Gain	-22dB -42dB	+/-1dB +/-1dB with 20dB pad engaged
Pad Attenuation	20dB	+/-1dB

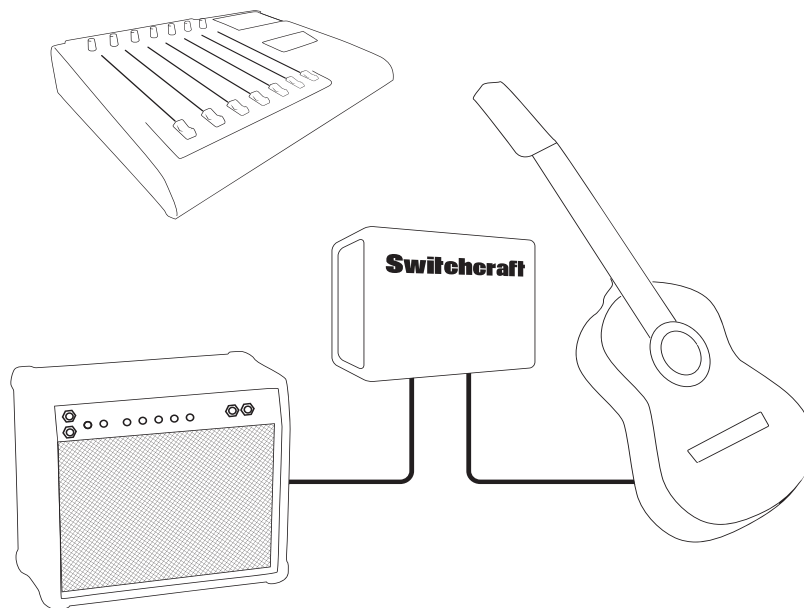

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Patch Panels](#) category:

Click to view products by [Switchcraft](#) manufacturer:

Other Similar products are found below :

[MMVP96K2N75T](#) [MMVP96K2NNT](#) [MMVP96K2NT](#) [MMVP96K3NNT](#) [QGPK1LCM](#) [QGPK3CAT5E](#) [QGPK3CAT5ES](#) [QGPK3LC](#)
[QGPK3LCM](#) [QGPK3ST](#) [QGPK3STM](#) [DS303](#) [DS311](#) [DS317](#) [JS-16](#) [JSH-24](#) [QGPK1CAT5ES](#) [QGPK1CAT6S](#) [QGPK1LC](#) [QGPK1SC](#)
[QGPK1SCM](#) [QGPK1ST](#) [QGPK1STM](#) [QGPK3CAT6](#) [QGPK3CAT6S](#) [QGPK3SC](#) [TT91202](#) [TT91402](#) [MMVP48K275T](#) [MMVP48K2NNT](#)
[MMVP48K2NT](#) [MMVP96K275T](#) [MMVP96K375T](#) [MMVP96K3N75T](#) [JSIS-72](#) [K576](#) [DS385](#) [Switchcraft TT518](#) [TT95DC](#) [TT91002](#)
[DS368](#) [JS-36A](#) [JSI-8D2SF24](#) [JSIX-64S](#) [JS-52W](#) [JSI-40S](#) [K6004B](#) [314DI](#) [K6002D](#) [MMVPTL](#)