

Wire Wound Type Common Mode Filter


HSF1210F2SF-SERIES

1. Features

1. High common mode impedance at high frequency cause excellent noise suppression performance.
2. HSF1210F2SF series realizes small size and low profile. 1.2x1.0x0.9 mm.
3. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
4. Excellent for USB3.0
5. Operating temperature -40~+125°C (Including self - temperature rise)




2. Dimension

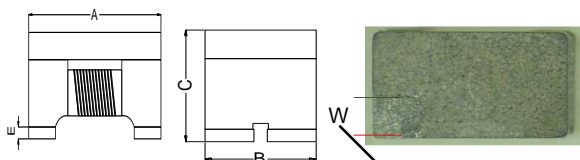

當破損面積 < 5% 產品列入允收品範圍

產品破損寬度



Series	A(mm)	B(mm)	C(mm)	D1(mm)	D2(mm)	E(mm)
1210F2SF	1.2±0.2	1.0±0.2	0.9 max.	0.35±0.1	0.35±0.1	0.03 min.



3. Part Numbering




- A: Series
- B: Dimension
- C: Material Ferrite
- D: Number of Lines 2=2 lines
- E: Type S=One Circuit Type , N=Unshielded
- F: Lead free
- G: Impedance 900=90Ω
- H: Packaging T=Taping and Reel, B=Bulk
- I: Rated Current 02=200mA


4. Specification



TAI-TECH Part Number	Common mode Impedance (Ω)	Test Frequency (MHz)	DC Resistance (Ω) max.	Rated Current (mA)	Rated Volt. (Vdc)	Withstand Volt. (Vdc)	IR (Ω) min.
HSF1210F2SF-500T02	50±25%	100	0.30	250	50	125	10M
HSF1210F2SF-600T02	60±25%	100	0.30	250	50	125	10M
HSF1210F2SF-900T02	90±25%	100	0.40	200	50	125	10M

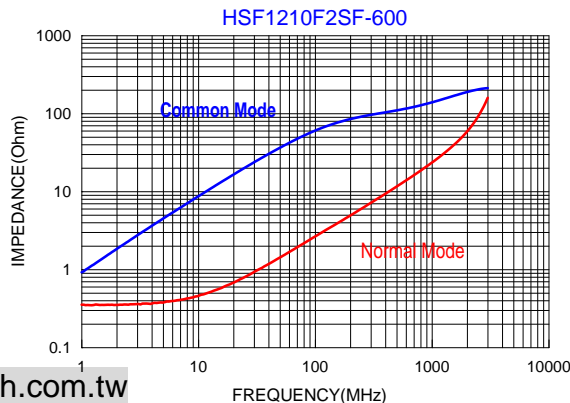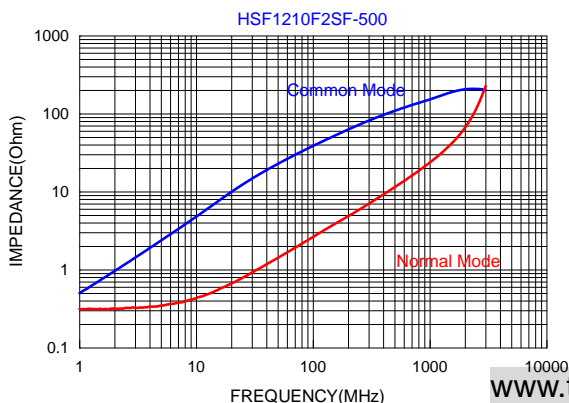

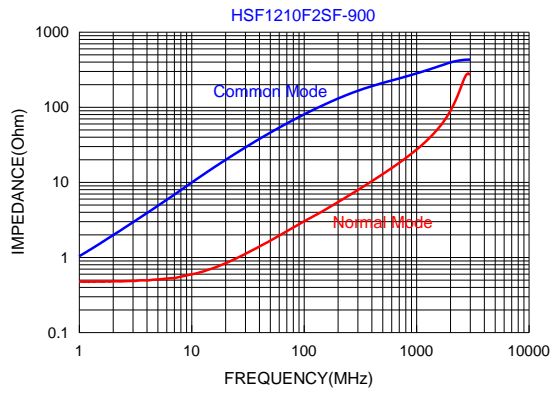

Sdd21&Scc21

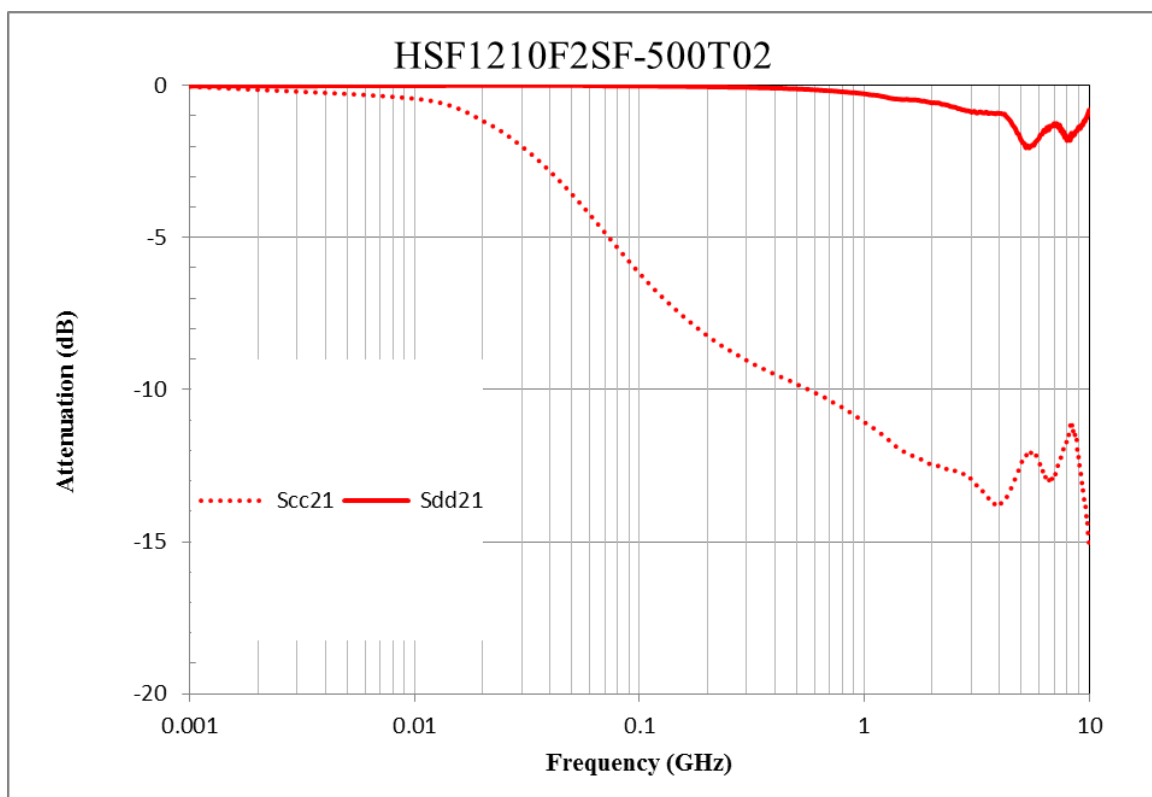

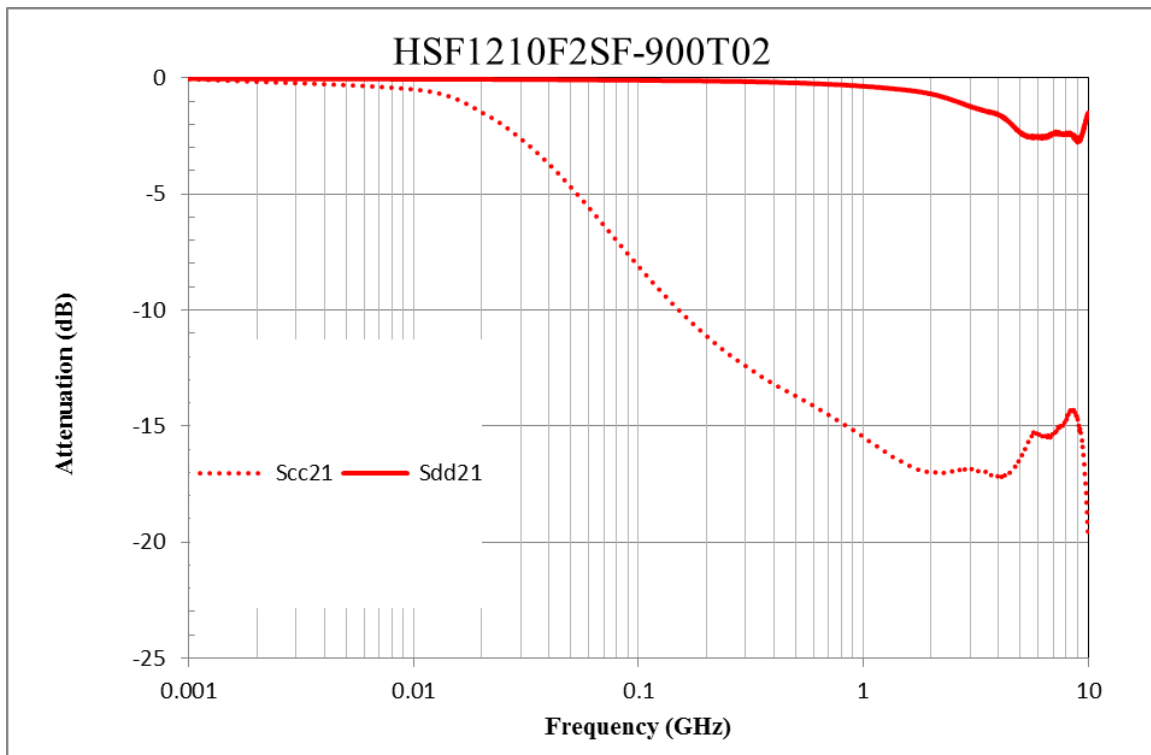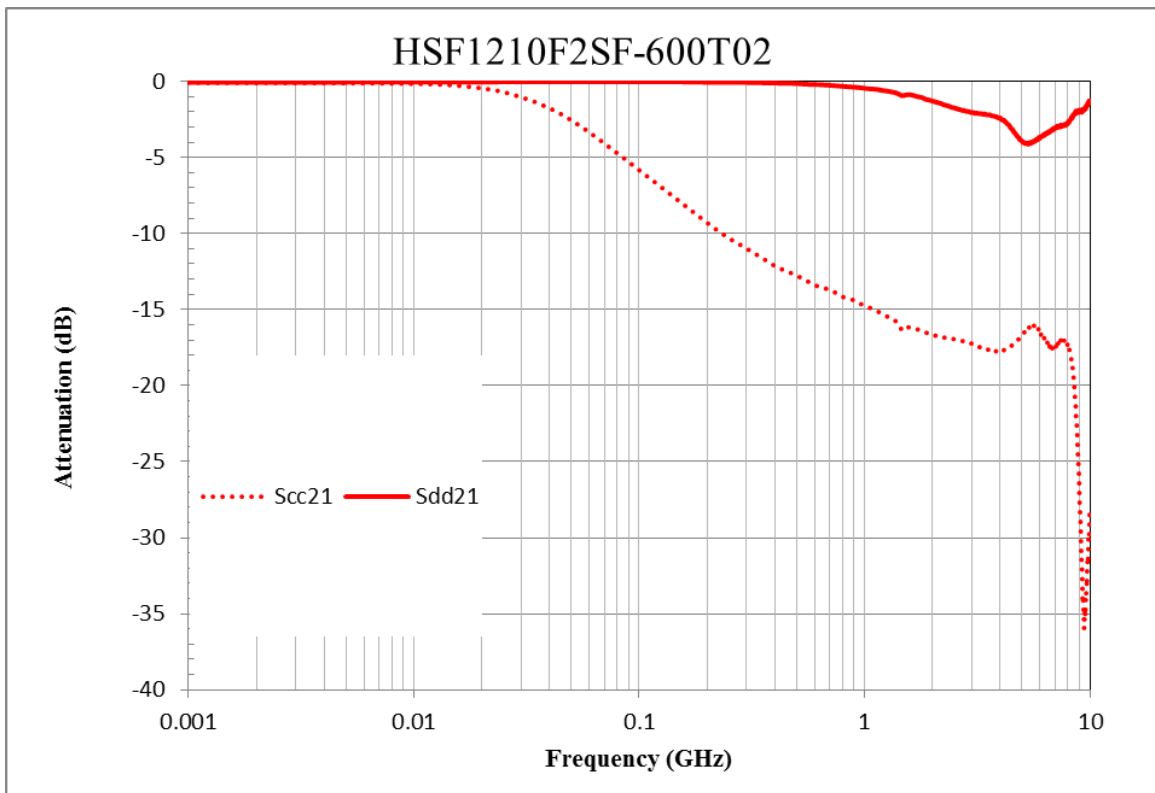

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Common Mode Chokes / Filters](#) category:

Click to view products by [Tai-Tech](#) manufacturer:

Other Similar products are found below :

[PE-64683](#) [RD5122-6-9M6](#) [ST6118T-R](#) [FE3X025-10-7NL](#) [T8114NLT](#) [TCM0806G-350-2P-T](#) [TCM0806G-650-2P-T](#) [IND-0110](#)
[UAL21VR0802000](#) [UALSC023000000](#) [UALSC1020JH000](#) [UALSU10VD20010](#) [UALSU9VD070100](#) [36-00037](#) [CM7060M132R-10](#)
[UALW21HS072450](#) [UALSU9H0208000](#) [UAL24VK06450CH](#) [PLT10HH501100PNB](#) [PLT10HH401100PNB](#) [PLT10HH1026R0PNB](#) [36-](#)
[00029-01](#) [PE-67531](#) [TLH10UB](#) [113 OR5](#) [2752045447](#) [CM8663Z161B-10](#) [7351V](#) [CMF16-153131](#) [T8116NLT](#) [CMS2-10-R](#) [FE2X10-4-2NL](#)
[T8003NLT](#) [CTX01-13663](#) [CTX66-19521-R](#) [RC212-0.5-10M](#) [RC112-0.4-15M](#) [RC212-0.6-6M8](#) [RC212-0.4-15M](#) [RC112-0.3-30M](#) [4534-3](#)
[WTCF2012Z0M751PB](#) [PH9408.814NLT](#) [B82498B3221J000](#) [PAC6006.364NLT](#) [PAC6006.444NLT](#) [PAC6006.204NLT](#) [PH9407.204NLT](#)
[PAC6006.264NLT](#) [PH9408.105NLT](#) [PH9408.494NLT](#)