

## 200mW, PNP Small Signal Transistor

### FEATURES

- Low power loss, high efficiency
- Ideal for automated placement
- High surge current capability
- Moisture sensitivity level: level 1, per J-STD-020
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21


### APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter

### MECHANICAL DATA

- Case: SOT-23
- Molding compound meets UL 94 V-0 flammability rating
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Weight: 0.008 g (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
$V_{CBO}$	-80	V
$V_{CEO}$	-65	V
$V_{EBO}$	-5	V
$I_C$	-0.1	A
$h_{FE}$	250-800	
Package	SOT-23	
Configuration	Single die	



ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)				
PARAMETER		SYMBOL	VALUE	UNIT
Marking code on the device	BC856A		3A	
	BC856B		3B	
	BC857A		3E	
	BC857B		3F	
	BC857C		3G	
	BC858A		3J	
	BC858B		3K	
	BC858C		3L	
Power dissipation		$P_D$	200	mW

<b>ABSOLUTE MAXIMUM RATINGS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)				
<b>PARAMETER</b>		<b>SYMBOL</b>	<b>VALUE</b>	<b>UNIT</b>
Collector-base voltage	BC856	$V_{CBO}$	-80	V
	BC857		-50	
	BC858		-30	
Collector-emitter voltage	BC856	$V_{CEO}$	-65	V
	BC857		-45	
	BC858		-30	
Emitter-base voltage		$V_{EBO}$	-5	V
Collector current		$I_C$	-0.1	A
Junction temperature		$T_J$	-55 to +150	$^\circ\text{C}$
Storage temperature		$T_{STG}$	-55 to +150	$^\circ\text{C}$

<b>ELECTRICAL SPECIFICATIONS</b> ( $T_A = 25^\circ\text{C}$ unless otherwise noted)						
<b>PARAMETER</b>	<b>CONDITIONS</b>		<b>SYMBOL</b>	<b>MIN</b>	<b>MAX</b>	<b>UNIT</b>
Collector cutoff current	$V_{CB} = -70\text{ V}, I_E = 0$	BC856	$I_{CBO}$	-	-100	nA
	$V_{CB} = -45\text{ V}, I_E = 0$	BC857		-	-100	
	$V_{CB} = -25\text{ V}, I_E = 0$	BC858		-	-100	
Emitter cutoff current	$V_{EB} = -5\text{ V}, I_C = 0$		$I_{EBO}$	-	-0.1	$\mu\text{A}$
Collector-base voltage	$I_C = -10\ \mu\text{A}, I_E = 0$	BC856	$V_{CBO}$	-80	-	V
		BC857		-50	-	
		BC858		-30	-	
Collector-emitter voltage	$I_C = -10\text{ mA}, I_B = 0$	BC856	$V_{CEO}$	-65	-	V
		BC857		-45	-	
		BC858		-30	-	
Emitter-base voltage	$I_E = -1\ \mu\text{A}, I_C = 0$		$V_{EBO}$	-5	-	V
DC current gain	$V_{CE} = -5\text{ V}, I_C = -2\text{ mA}$	BC856A/BC857A/BC858A	$h_{FE}$	125	250	
		BC856B/BC857B/BC858B		220	475	
		BC857C/BC858C		420	800	
Collector-emitter saturation voltage	$I_C = -100\text{ mA}, I_B = -5\text{ mA}$		$V_{CE(sat)}$	-	-0.65	V
Base-emitter saturation voltage	$I_C = -100\text{ mA}, I_B = -5\text{ mA}$		$V_{BE(sat)}$	-	-1.10	V
Transition frequency	$V_{CE} = -5\text{ V}, I_C = -10\text{ mA}, f = 100\text{ MHz}$		$f_T$	100	-	MHz

<b>ORDERING INFORMATION</b>		
<b>ORDERING CODE</b> (Note1, 2)	<b>PACKAGE</b>	<b>PACKING</b>
BC85XX RF	SOT-23	3K / 7" Reel
BC85XX RFG	SOT-23	3K / 7" Reel


**Note:**

1. "xx" is device code "6A" to "8C"
2. "G" means green compound (halogen free)


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.1 Static Characteristic**

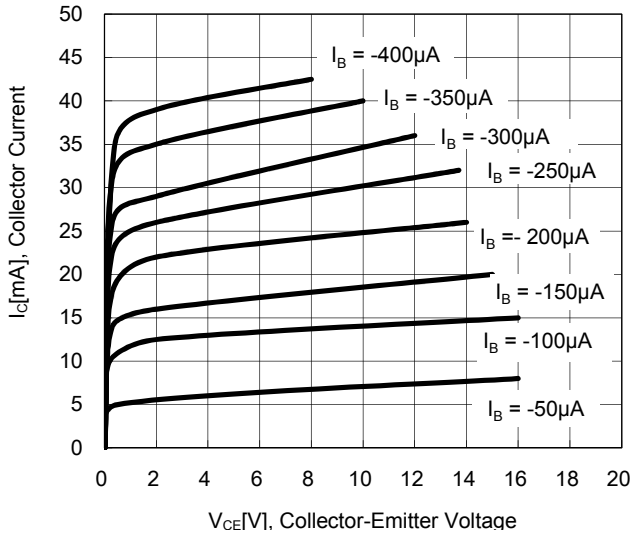


**Fig. 2 DC Current Gain**

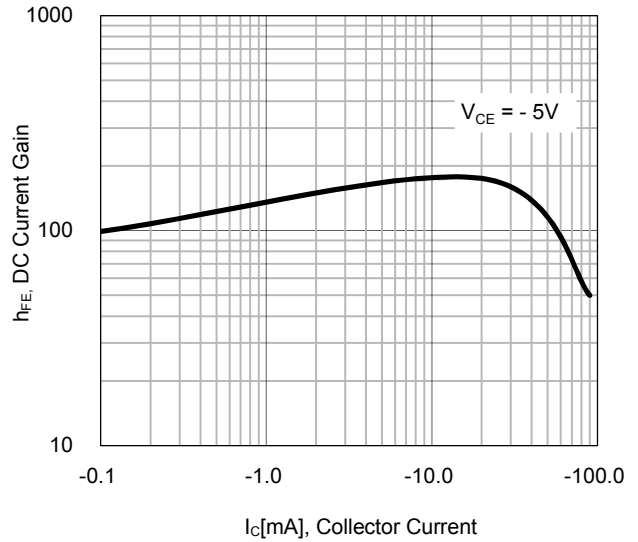

**Fig.3 Base-Emitter Saturation Voltage VS. Collector-Emitter Saturation**

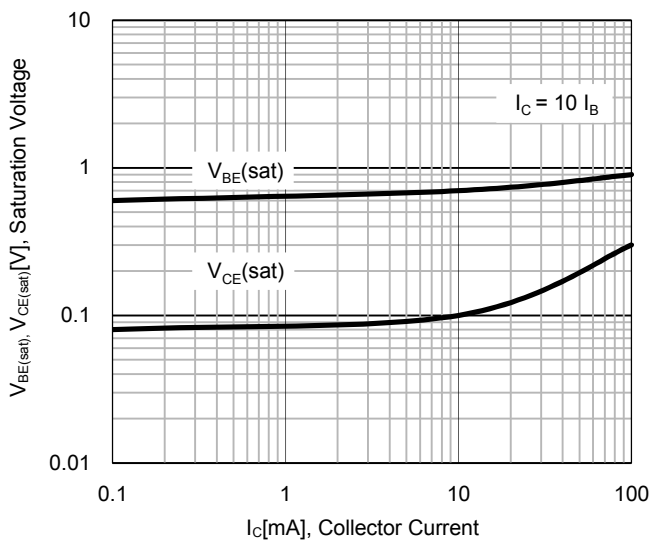


**Fig.4 Base-Emitter On Voltage**

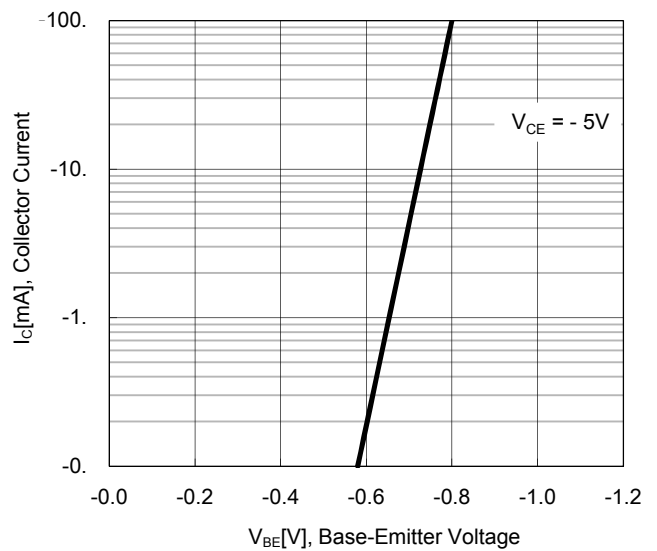


**CHARACTERISTICS CURVES**

( $T_A = 25^\circ\text{C}$  unless otherwise noted)


**Fig.5 Collector Output Capacitance**

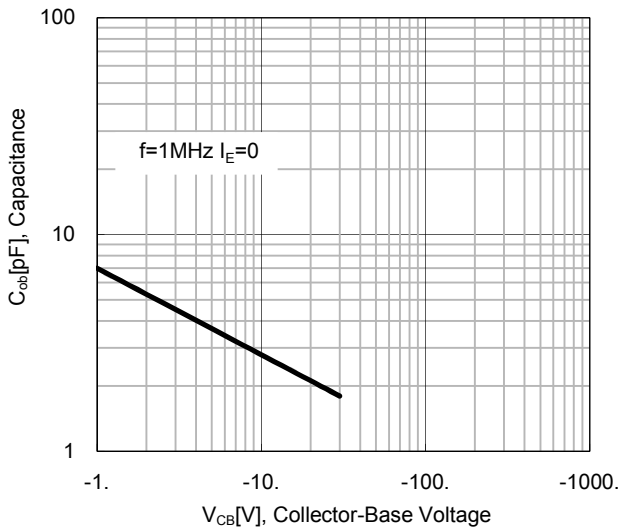


**Fig. 6 Current Gain Bandwidth Product**

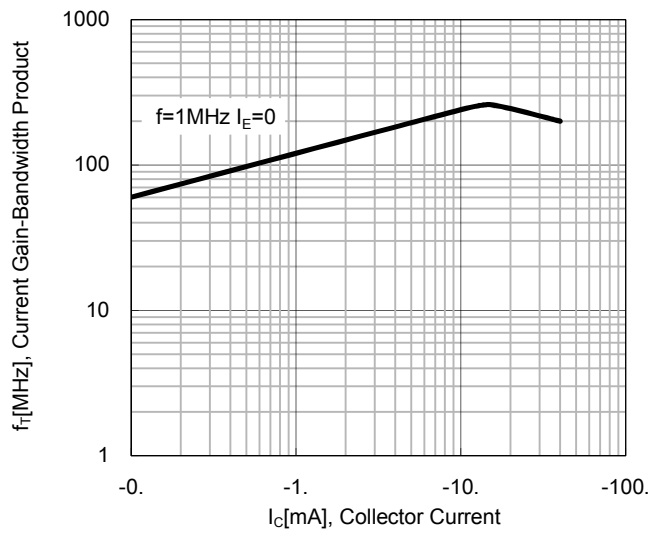

**Fig.7 DC Current Gain as a Function of Collector Current; Typical Values**

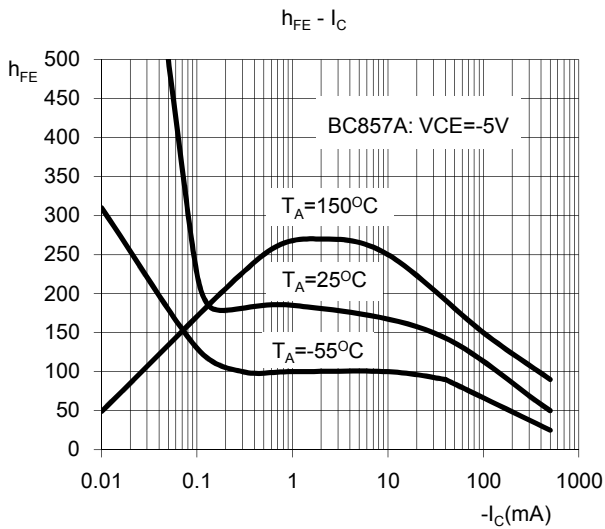


**Fig.8 Base-Emitter Voltage as a Function of Collector Current; Typical Values**

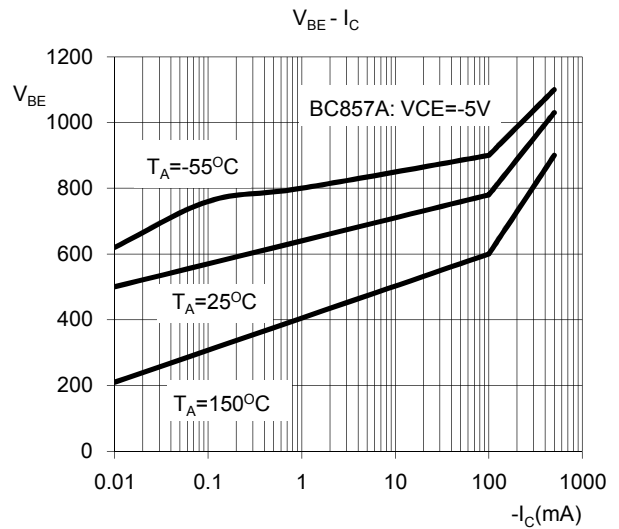


**PACKAGE OUTLINE DIMENSION**

SOT-23

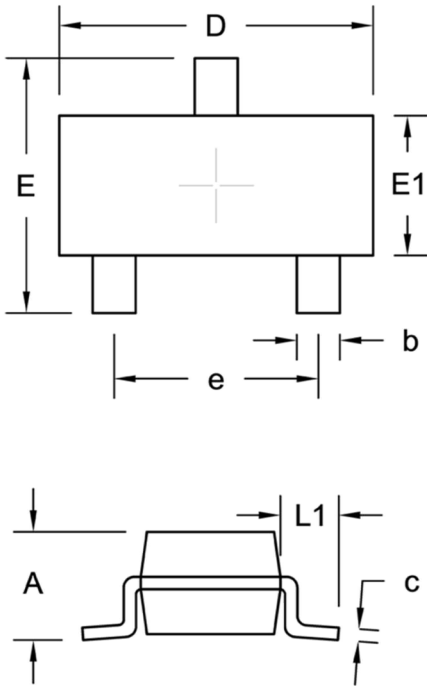

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	0.89	1.12	0.035	0.044
b	0.30	0.50	0.012	0.020
c	0.08	0.20	0.003	0.008
D	2.80	3.04	0.110	0.120
E	2.10	2.64	0.083	0.104
E1	1.20	1.40	0.047	0.055
e	1.90 BSC		0.075 BSC	
L1	0.54 REF.		0.021 REF.	

**SUGGESTED PAD LAYOUT**

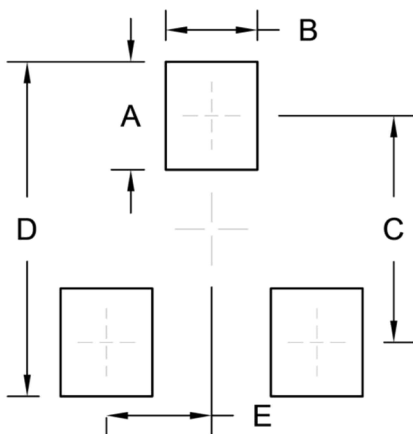

Symbol	Unit (mm)	Unit (inch)
A	1.00	0.039
B	0.85	0.033
C	2.10	0.083
D	3.10	0.122
E	0.98	0.039

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [Taiwan Semiconductor manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NTE158](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE63](#) [C4460](#)  
[2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMMTA92QTA](#)  
[2N2369ADCSM](#) [2SC2412KT146S](#) [2SC5490A-TL-H](#) [2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)  
[US6T6TR](#) [NJL0281DG](#) [732314D](#) [CMXT3906 TR](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [EMT2T2R](#)  
[MCH6102-TL-E](#) [FP204-TL-E](#) [NJL0302DG](#) [2N3583](#) [2SA1434-TB-E](#) [2SC3143-4-TB-E](#) [2SD1621S-TD-E](#) [NTE103](#) [30A02MH-TL-E](#)  
[NSV40301MZ4T1G](#) [NTE101](#) [NTE13](#)