



Datasheet

Havok

Part No:
PCS.06.A

Description:

Low Profile LTE/Cellular 4G/3G/2G SMD Dielectric Antenna

Features:

SMD Dielectric Antenna
698~960MHz/1710~2690MHz
High Efficiency SMD antenna
Low profile 42*10*3mm
RoHS & REACH Compliant

| | |
|----------------------------|----|
| 1. Introduction | 3 |
| 2. Specifications | 4 |
| 3. Antenna Characteristics | 6 |
| 4. Radiation Patterns | 9 |
| 5. Mechanical Drawing | 18 |
| 6. Intergration Guide | 19 |
| 7. Packaging | 27 |
| <hr/> | |
| Changelog | 29 |

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Introduction



The Havok PCS.06.A is a low profile SMD LTE/cellular 4G/3G/2G embedded antenna designed for direct SMD mount on a device PCB. It provides high efficiency in a very small factor 42*10*3mm. If tuning is required it can be tuned for the device environment, while there is no need for new tooling.

Its rectangular shape and small size makes it very easy to integrate – packaged in tape and reel, it can be mounted via pick and place to reflow solder directly on the edge of the PCB board. This antenna is recommended to be used with long ground-plane lengths of 120mm or more to attain its highest rated efficiency, note the return loss and efficiency graphs.

Typical Applications Include:

- Connected Health
- Handheld Devices
- Wearables

The antenna is suitable for lower cost LTE/cellular applications due to the ease of integration. Contact your regional Taoglas customer support team for quick and professional support from our senior engineering team on integration and matching of the antenna to your device.

2. Specifications


| ELECTRICAL | | | | | | | |
|----------------------------|-----------------------------------|---------|-----------------------------------|-----------|-----------|-----------------------------------|-----------|
| Frequency (MHz) | 698~803 | 824~894 | 880~960 | 1710~1880 | 1850~1990 | 1920~2170 | 2500~2690 |
| Peak Gain (dBi)* | 1.1 | 1.3 | 0.5 | 3.8 | 3.7 | 3.4 | 3.3 |
| Average Gain (dBi)* | -2.6 | -2.0 | -2.9 | -1.5 | -1.7 | -1.9 | -2.8 |
| Efficiency (%)* | 56 | 63 | 52 | 71 | 68 | 65 | 53 |
| Return Loss (dB)* | <-10 typ. <-7 at the band edge | | <-10 typ. <-7 at the band edge | | | <-10 typ. <-6 at the band edge | |
| Polarization | Linear | | | | | | |
| Impedance | 50Ω | | | | | | |
| Maximum Input Power | 5W | | | | | | |
| Mechanical | | | | | | | |
| Antenna Dimensions | 42mm x 10mm x 3mm | | | | | | |
| Material | FR4 | | | | | | |
| Weight | 2.50g | | | | | | |
| Soldering Type | SMD Reflow | | | | | | |
| Environmental | | | | | | | |
| Operation Temperature | -40°C ~ +85°C | | | | | | |
| Storage Temperature | -40°C ~ +85°C | | | | | | |
| Moisture Sensitivity Level | 3 | | | | | | |

* All measurements were done on 123*45mm EVB board with 100mm length ground plane.


| 5G/4G Bands | | | |
|-------------|--------------------------------------------------------------------|----------------------|---------|
| Band Number | 5G NR / FR1 / LTE / LTE-Advanced / WCDMA / HSPA / HSPA+ / TD-SCDMA | | |
| | Uplink | Downlink | Covered |
| 1 | UL: 1920 to 1980 | DL: 2110 to 2170 | ✓ |
| 2 | UL: 1850 to 1910 | DL: 1930 to 1990 | ✓ |
| 3 | UL: 1710 to 1785 | DL: 1805 to 1880 | ✓ |
| 4 | UL: 1710 to 1755 | DL: 2110 to 2155 | ✓ |
| 5 | UL: 824 to 849 | DL: 869 to 894 | ✓ |
| 7 | UL: 2500 to 2570 | DL: 2620 to 2690 | ✓ |
| 8 | UL: 880 to 915 | DL: 925 to 960 | ✓ |
| 9 | UL: 1749.9 to 1784.9 | DL: 1844.9 to 1879.9 | ✓ |
| 11 | UL: 1427.9 to 1447.9 | DL: 1475.9 to 1495.9 | ✗ |
| 12 | UL: 699 to 716 | DL: 729 to 746 | ✓ |
| 13 | UL: 777 to 787 | DL: 746 to 756 | ✓ |
| 14 | UL: 788 to 798 | DL: 758 to 768 | ✓ |
| 17 | UL: 704 to 716 | DL: 734 to 746 | ✓ |
| 18 | UL: 815 to 830 | DL: 860 to 875 | ✓ |
| 19 | UL: 830 to 845 | DL: 875 to 890 | ✓ |
| 20 | UL: 832 to 862 | DL: 791 to 821 | ✓ |
| 21 | UL: 1447.9 to 1462.9 | DL: 1495.9 to 1510.9 | ✗ |
| 22 | UL: 3410 to 3490 | DL: 3510 to 3590 | ✗ |
| 23 | UL: 2000 to 2020 | DL: 2180 to 2200 | ✓ |
| 24 | UL: 1625.5 to 1660.5 | DL: 1525 to 1559 | ✓ |
| 25 | UL: 1850 to 1915 | DL: 1930 to 1995 | ✓ |
| 26 | UL: 814 to 849 | DL: 859 to 894 | ✓ |
| 27 | UL: 807 to 824 | DL: 852 to 869 | ✓ |
| 28 | UL: 703 to 748 | DL: 758 to 803 | ✓ |
| 29 | UL: - | DL: 717 to 728 | ✓ |
| 30 | UL: 2305 to 2315 | DL: 2350 to 2360 | ✓ |
| 31 | UL: 452.5 to 457.5 | DL: 462.5 to 467.5 | ✗ |
| 32 | UL: - | DL: 1452 - 1496 | ✗ |
| 35 | | 1850 to 1910 | ✓ |
| 38 | | 2570 to 2620 | ✓ |
| 39 | | 1880 to 1920 | ✓ |
| 40 | | 2300 to 2400 | ✓ |
| 41 | | 2496 to 2690 | ✓ |
| 42 | | 3400 to 3600 | ✗ |
| 43 | | 3600 to 3800 | ✗ |
| 48 | | 3550 to 3700 | ✗ |
| 66 | UL: 1710-1780 | DL: 2110-2200 | ✓ |
| 71 | | 617 to 698 | ✓ |
| 74/75/76 | | 1427 to 1518 | ✓ |
| 78 | | 3300 to 3800 | ✗ |
| 79 | | 4400 to 5000 | ✗ |
| 85 | 698-716 | 728-746 | ✓ |

3. Antenna Characteristics


3.1 Return Loss

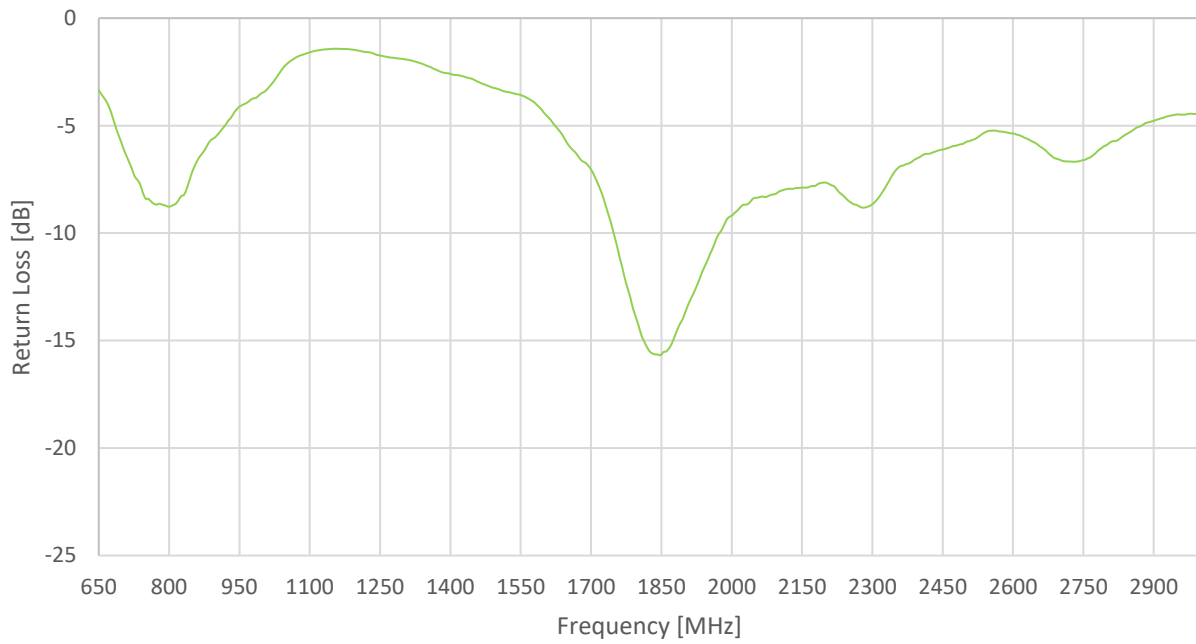


3.2 VSWR

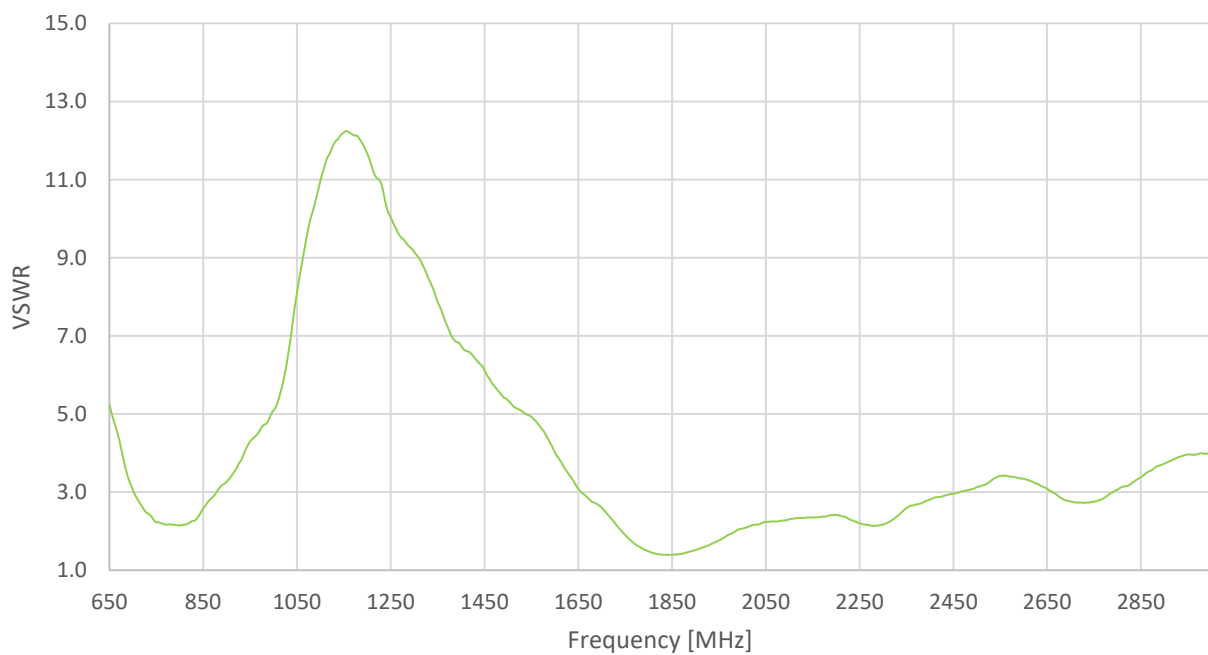


3.3 Efficiency

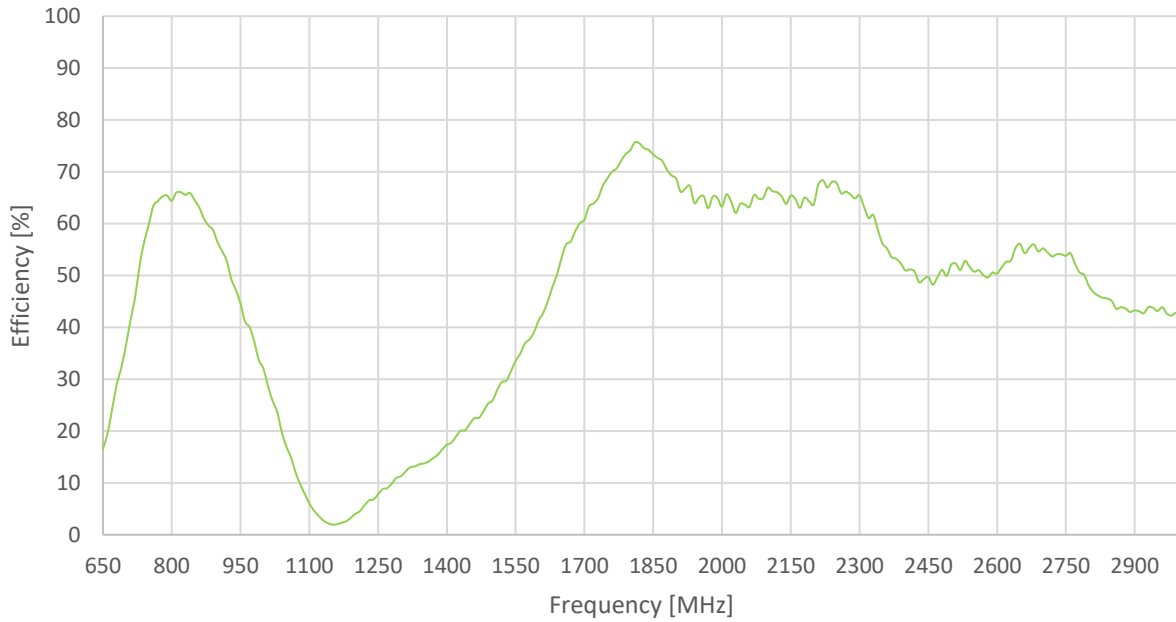

3.4 Peak Gain

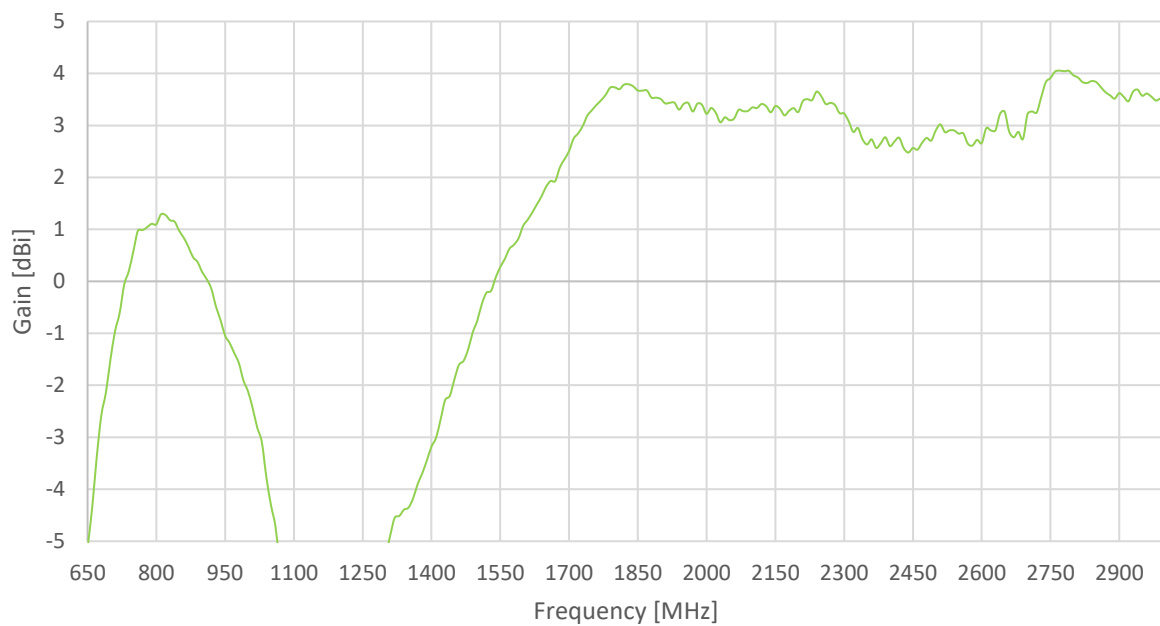


3.5 Average Gain

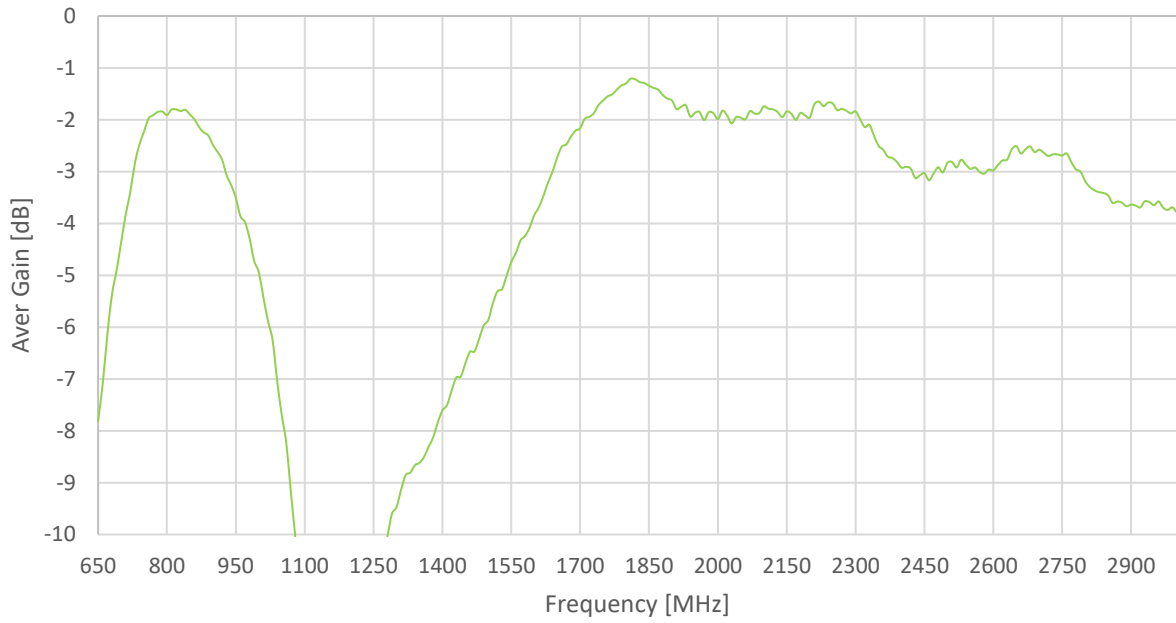


4. Radiation Patterns

4.1 Test Setup

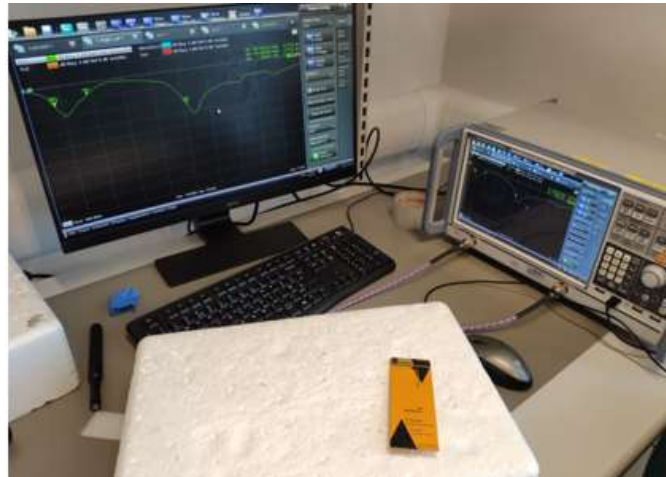


VNA Set-up

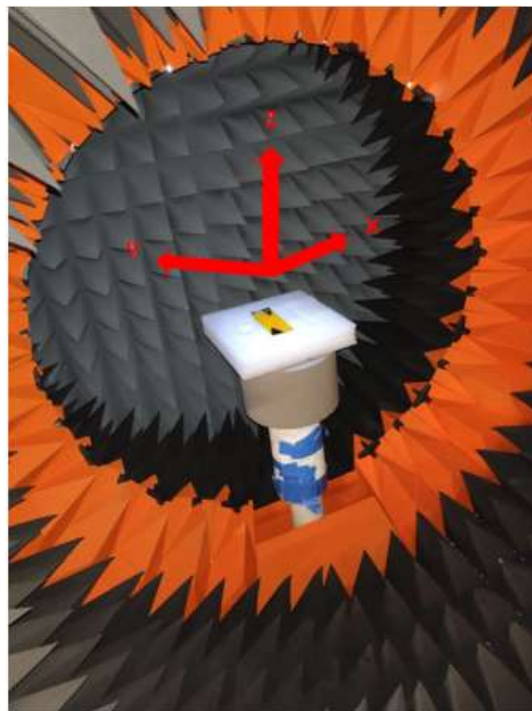

Chamber Set-up

4.2 3D and 2D Radiation Patterns




700MHz

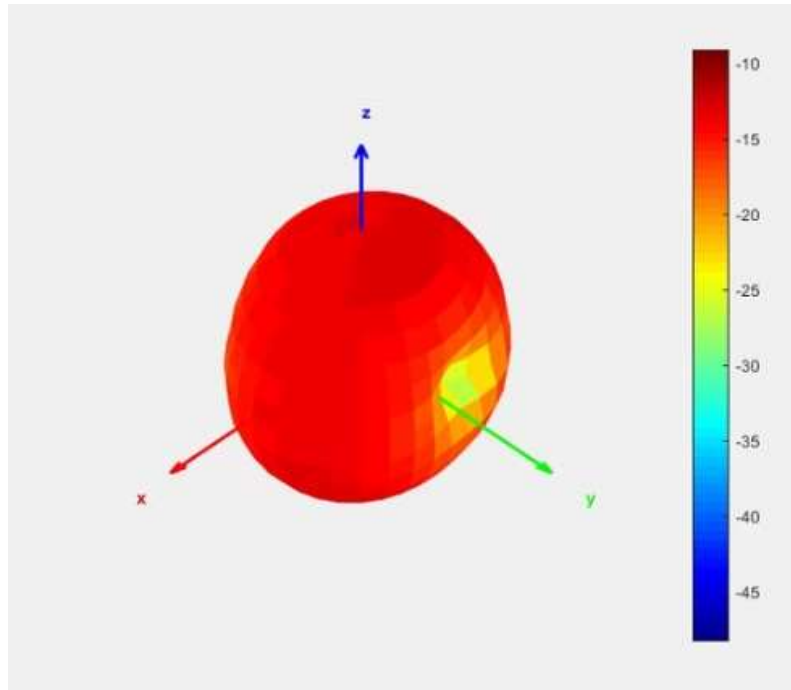


XY Plane

XZ Plane

YZ Plane

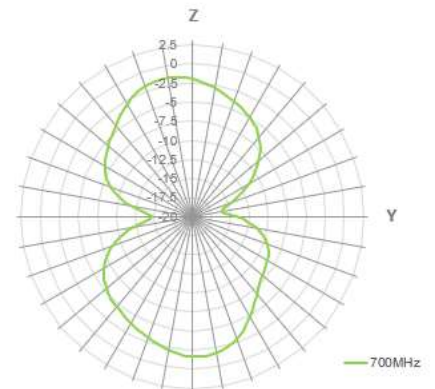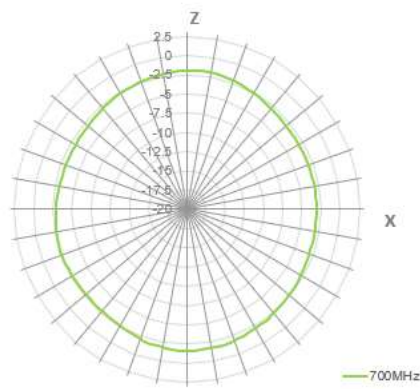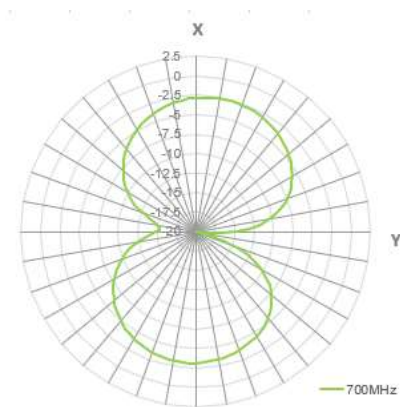




880MHz

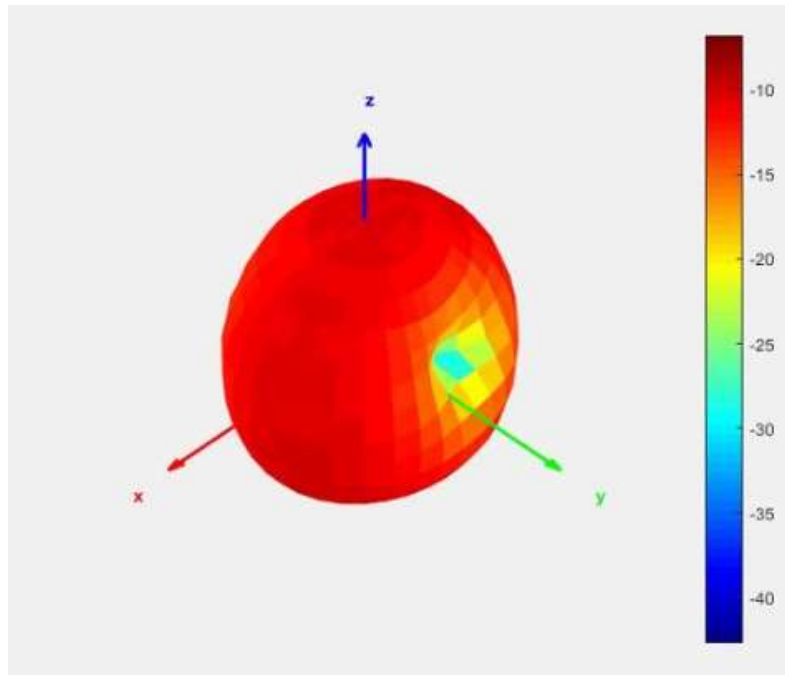


XY Plane

XZ Plane

YZ Plane

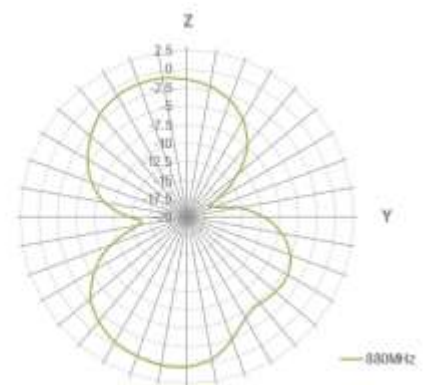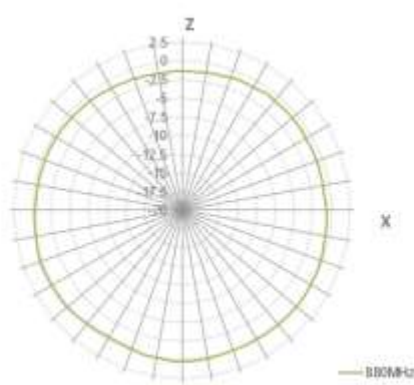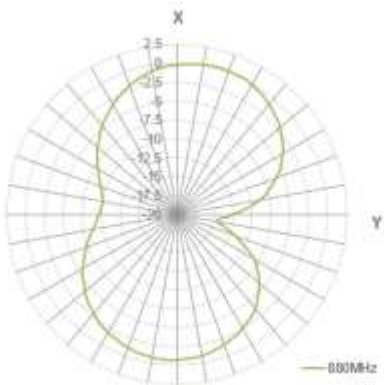




960MHz

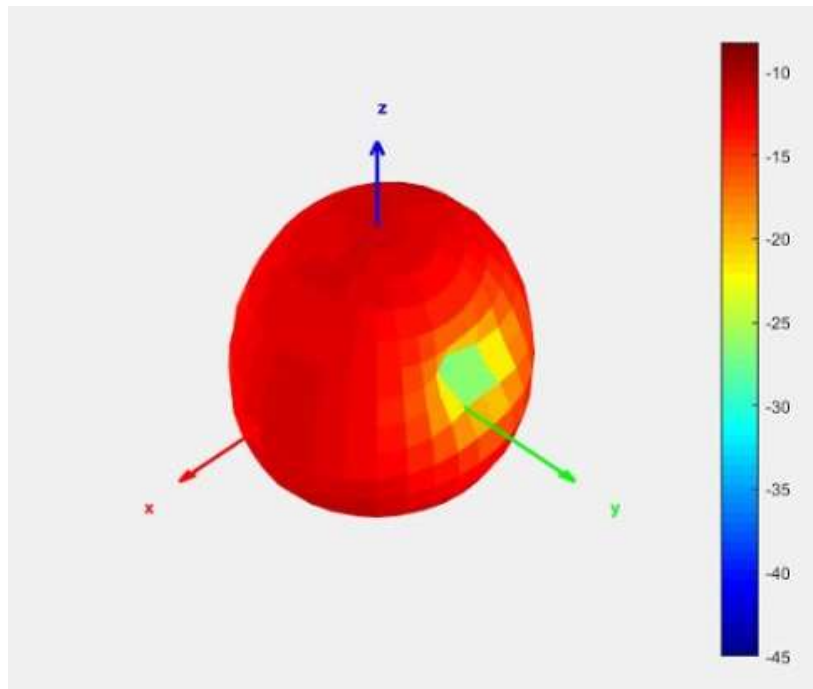


XY Plane

XZ Plane

YZ Plane

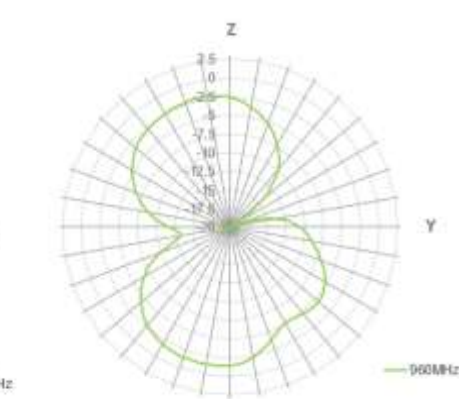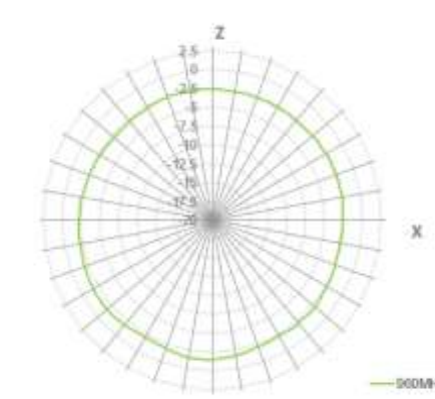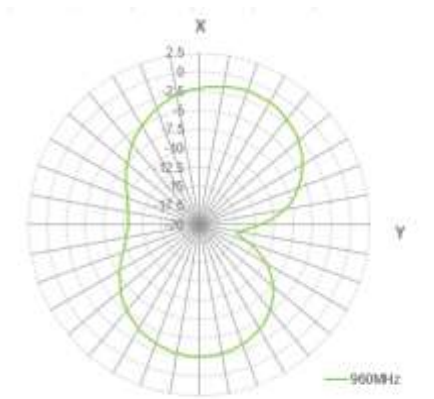




1700MHz

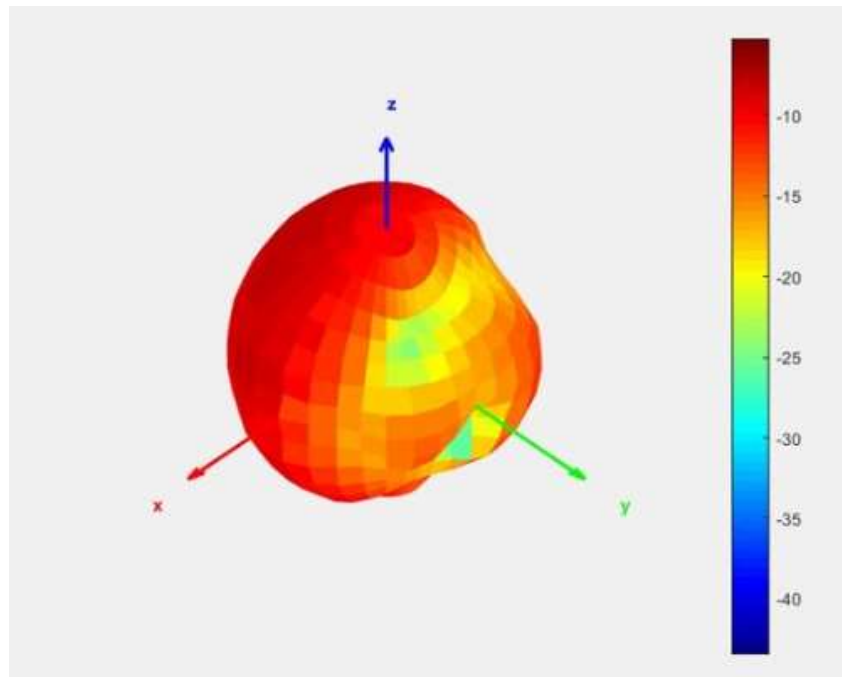


XY Plane

XZ Plane

YZ Plane

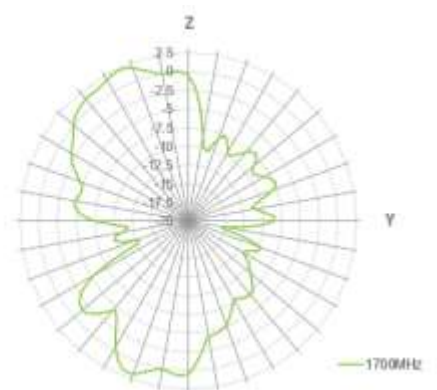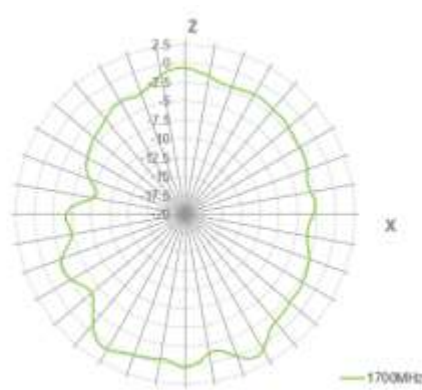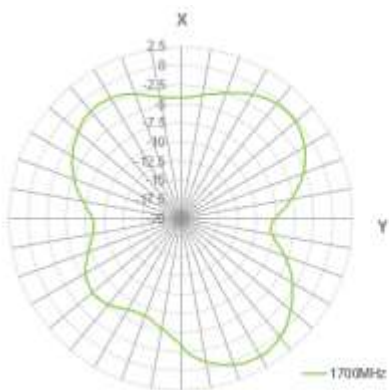




1800MHz

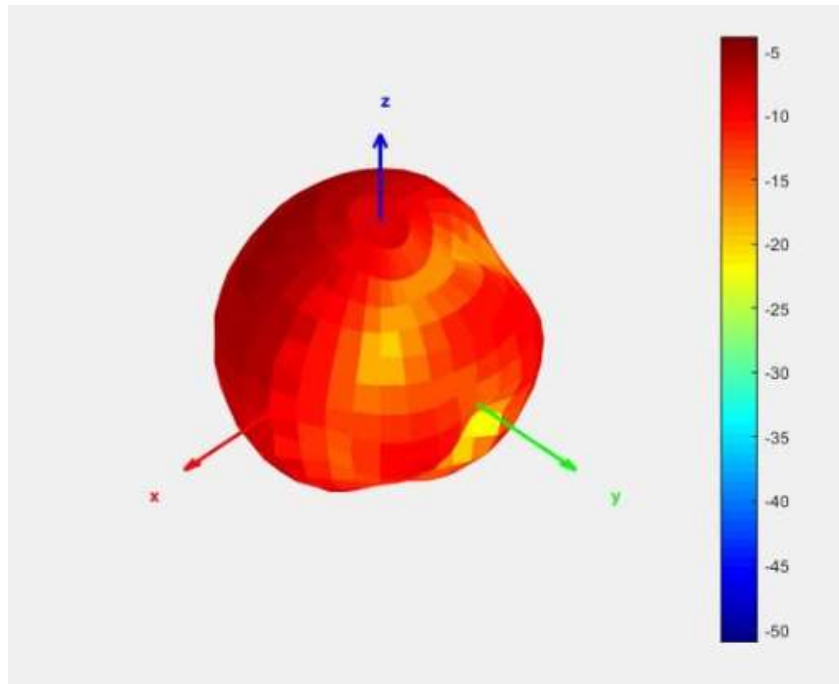


XY Plane

XZ Plane

YZ Plane

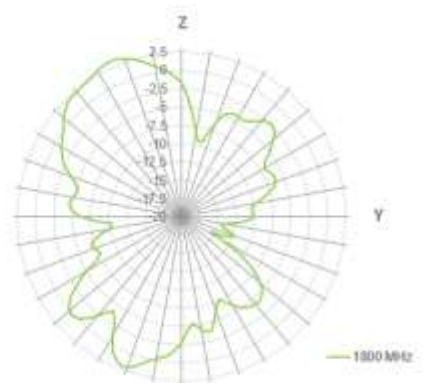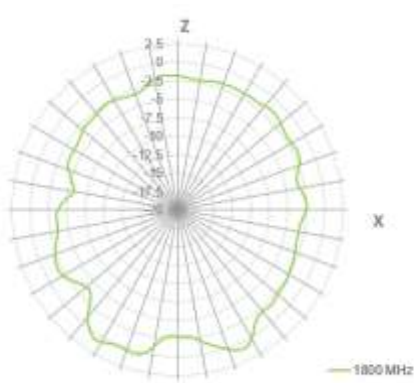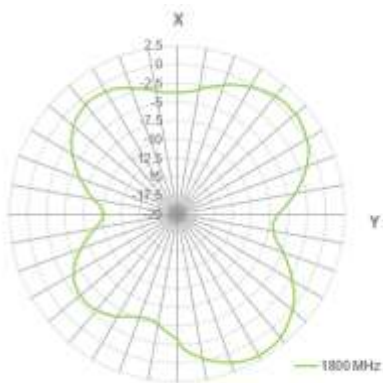




1900MHz

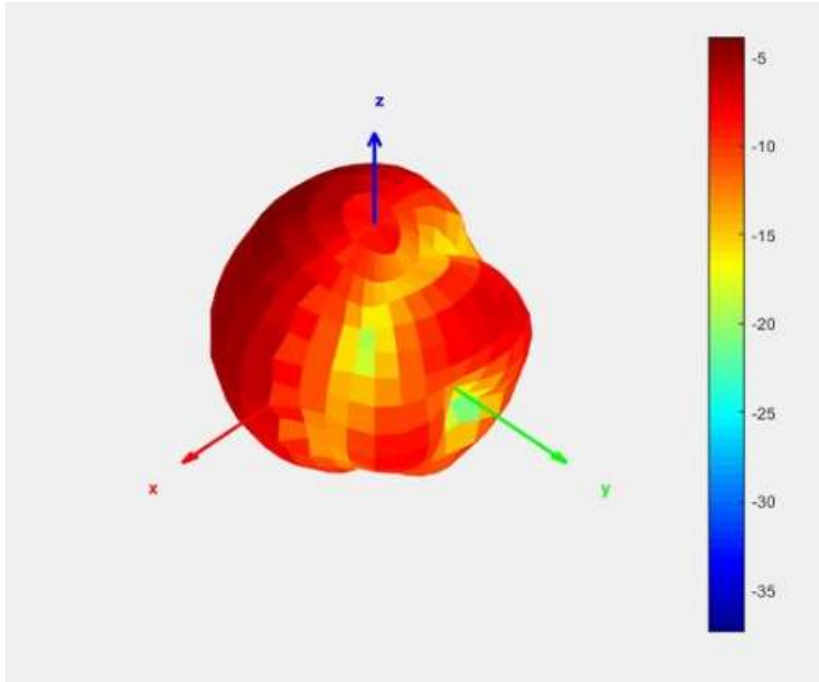


XY Plane

XZ Plane

YZ Plane

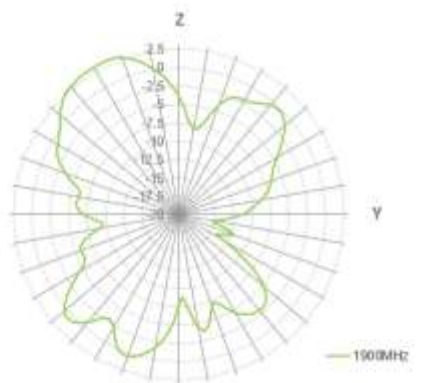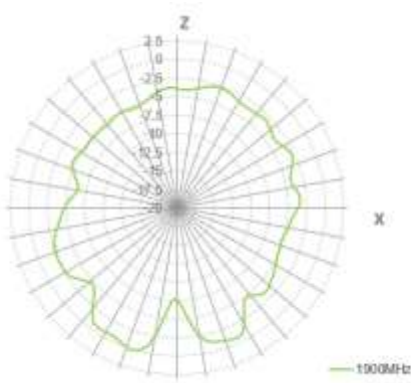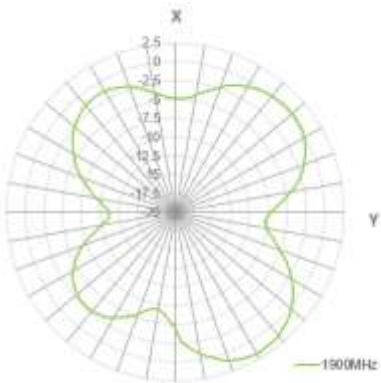




2100MHz

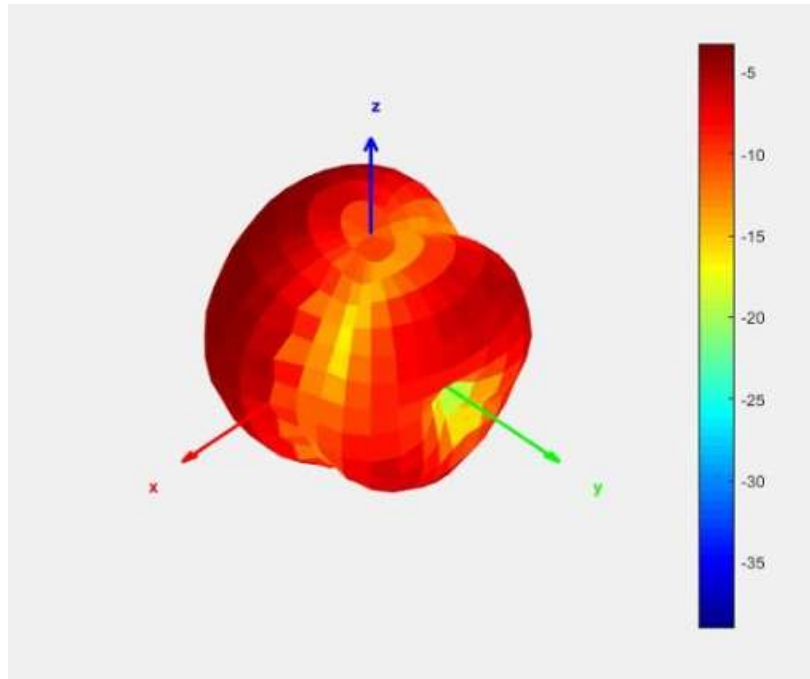


XY Plane

XZ Plane

YZ Plane

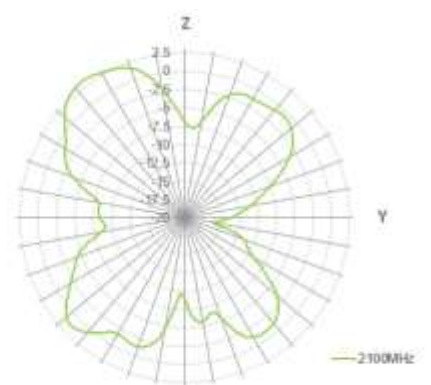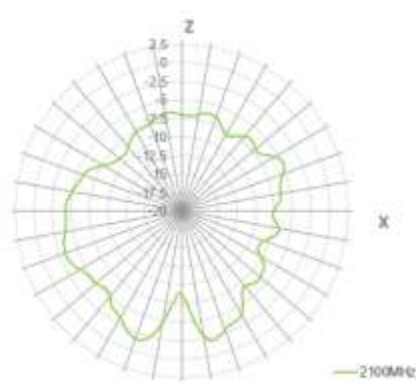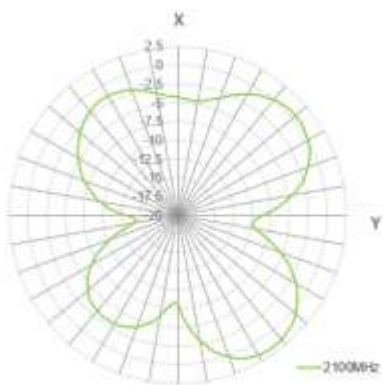




2700MHz

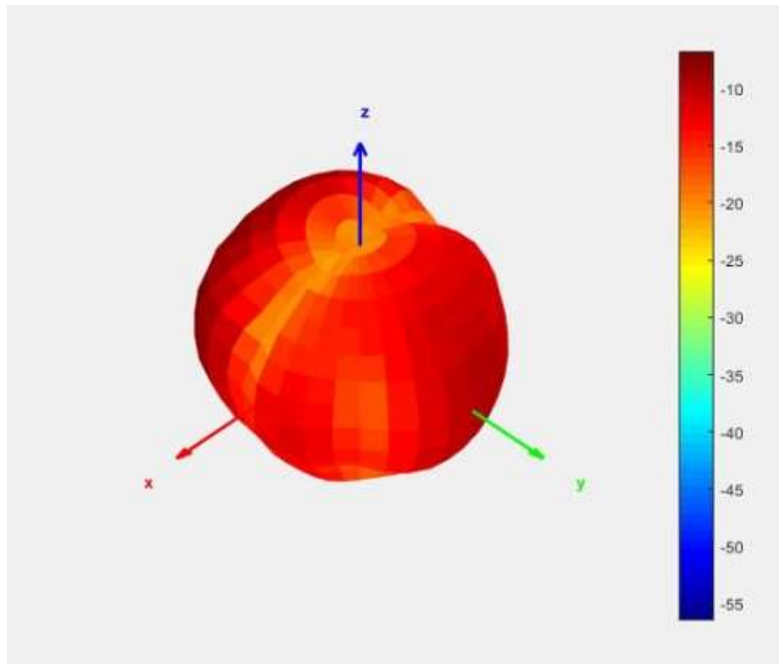


XY Plane

XZ Plane


YZ Plane

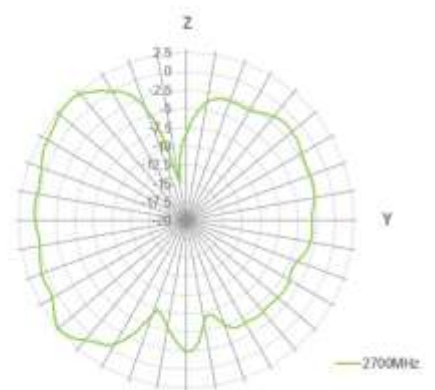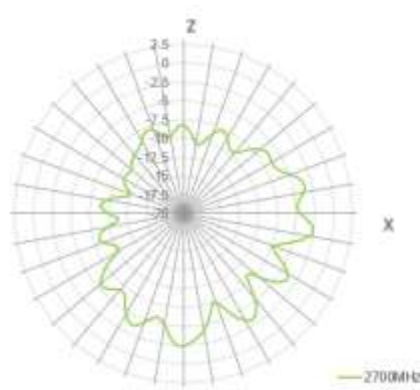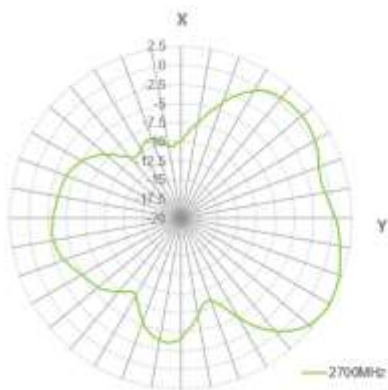


5. Mechanical Drawing (Units: mm)

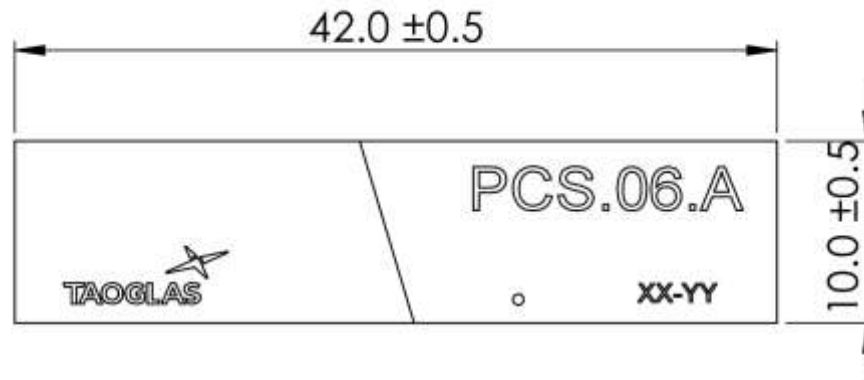

TOP VIEW

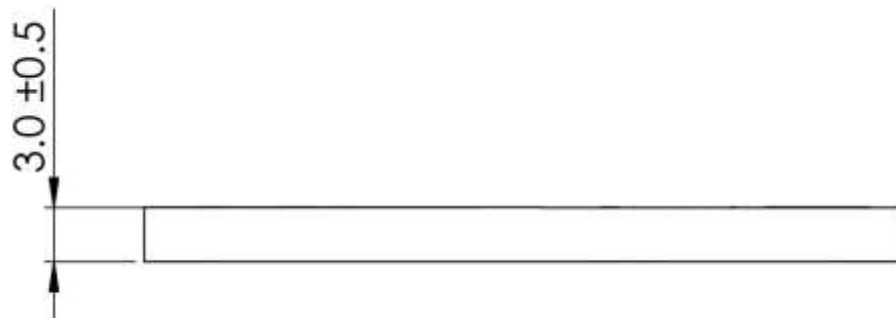


FRONT VIEW

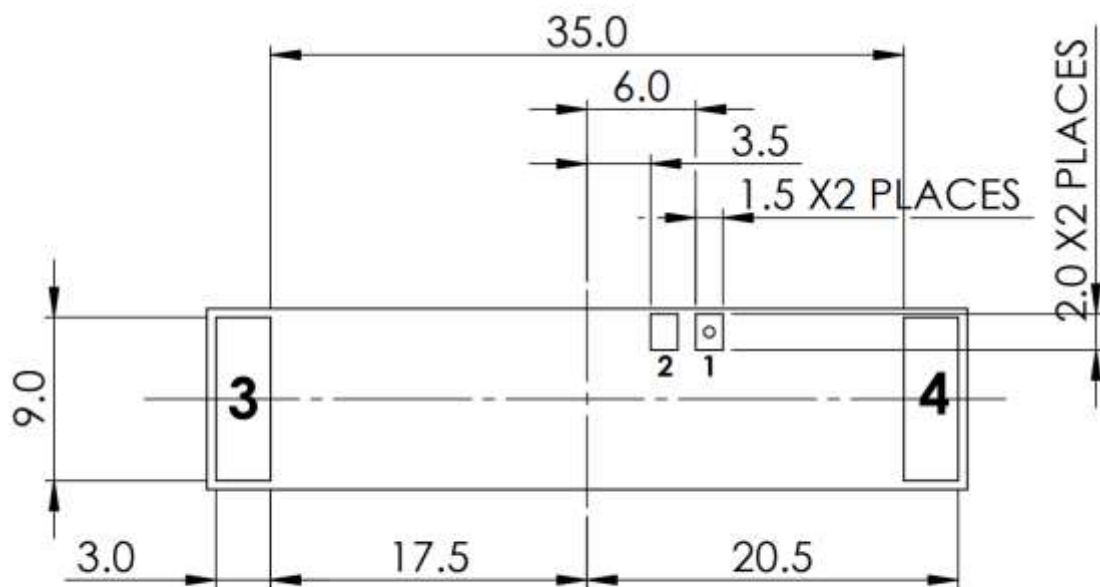

BOTTOM VIEW


6. Antenna Integration Guide

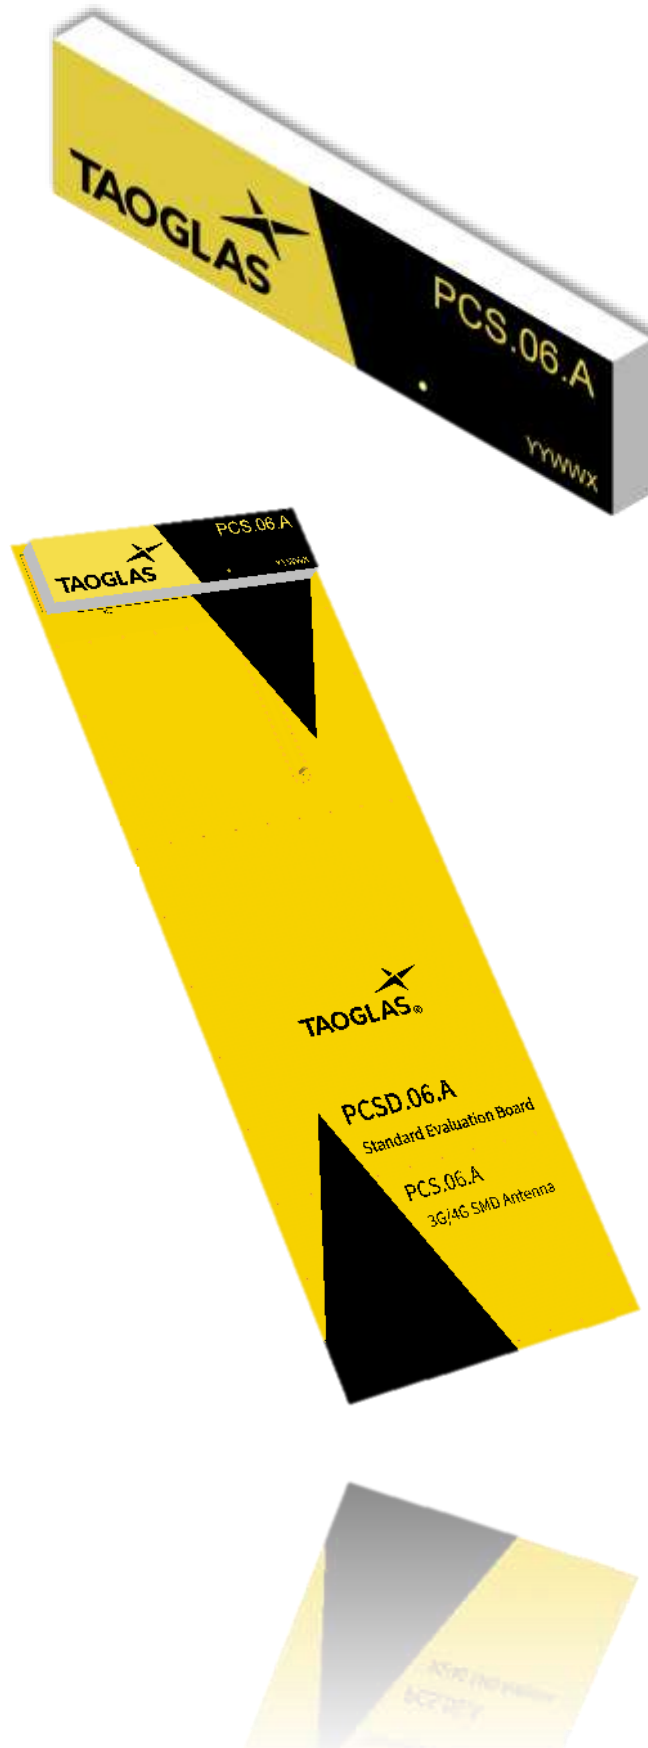

6.1 Schematic Symbol and Pin Definition

The circuit symbol for the antenna is shown below. The antenna has 4 pins with only two pins (Pin 1 and Pin 2) as functional. Pins 3 and 4 are for mechanical strength.

| Pin | Description |
|------|---------------------------|
| 1 | RF Feed |
| 2 | Ground |
| 3, 4 | Mechanical, Not Connected |

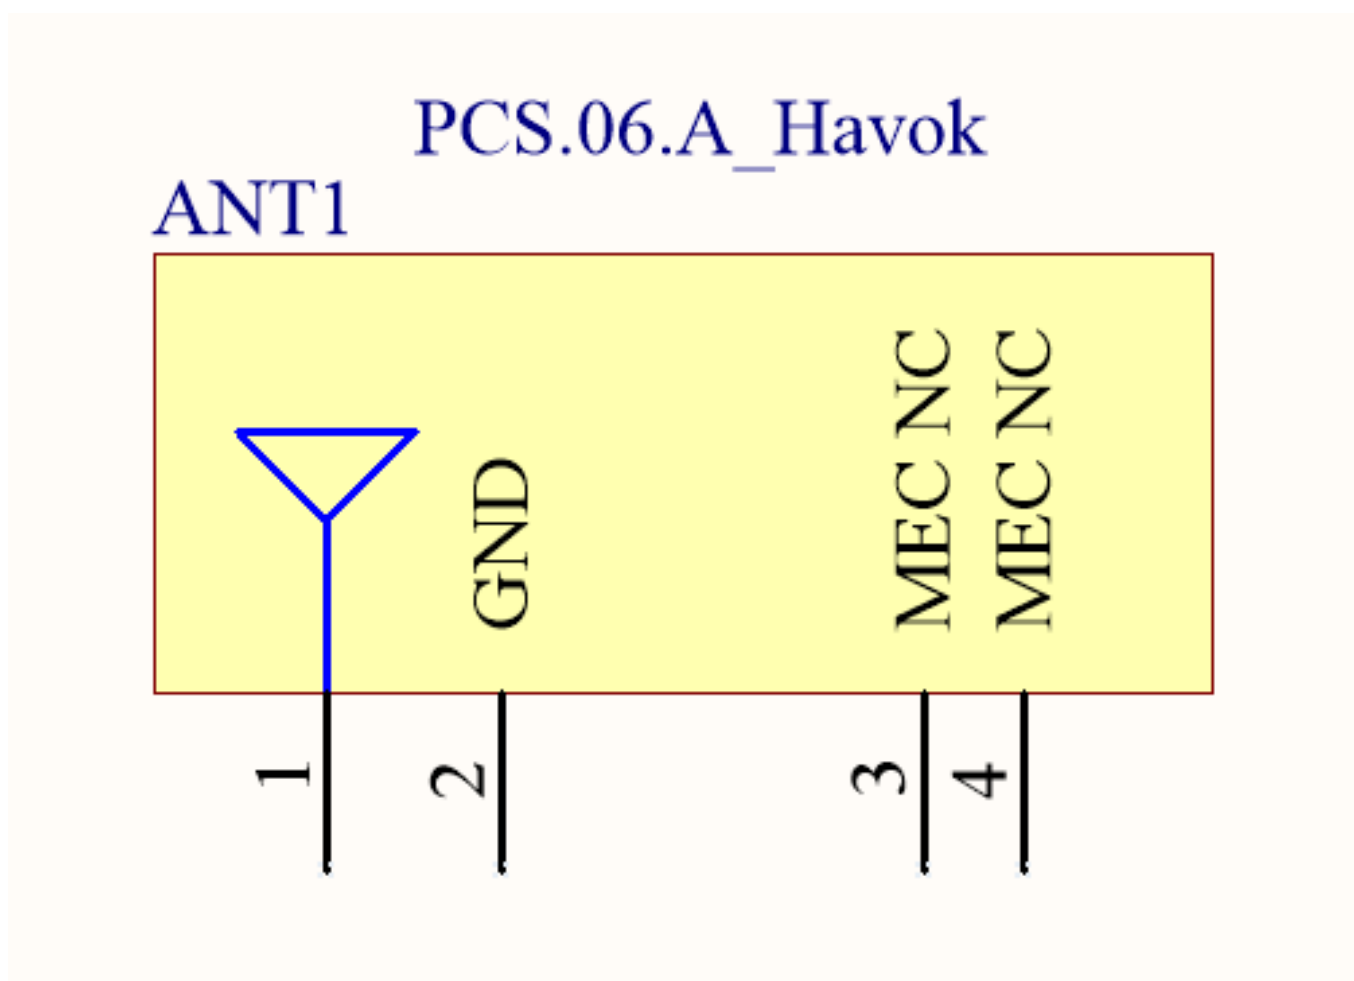


Please note you can download the design files, 3D model, 2D drawings and CST simulation files from the website here:

<https://www.taoglas.com/product/havok-pcs-06-2g3g4g-low-profile-smd-antenna-2/>


6.2 Antenna Integration

Whatever the size of the PCB, the antenna should ideally be placed on the PCB's shortest side, to take advantage of the ground plane. Optimized matching components can be placed as shown.

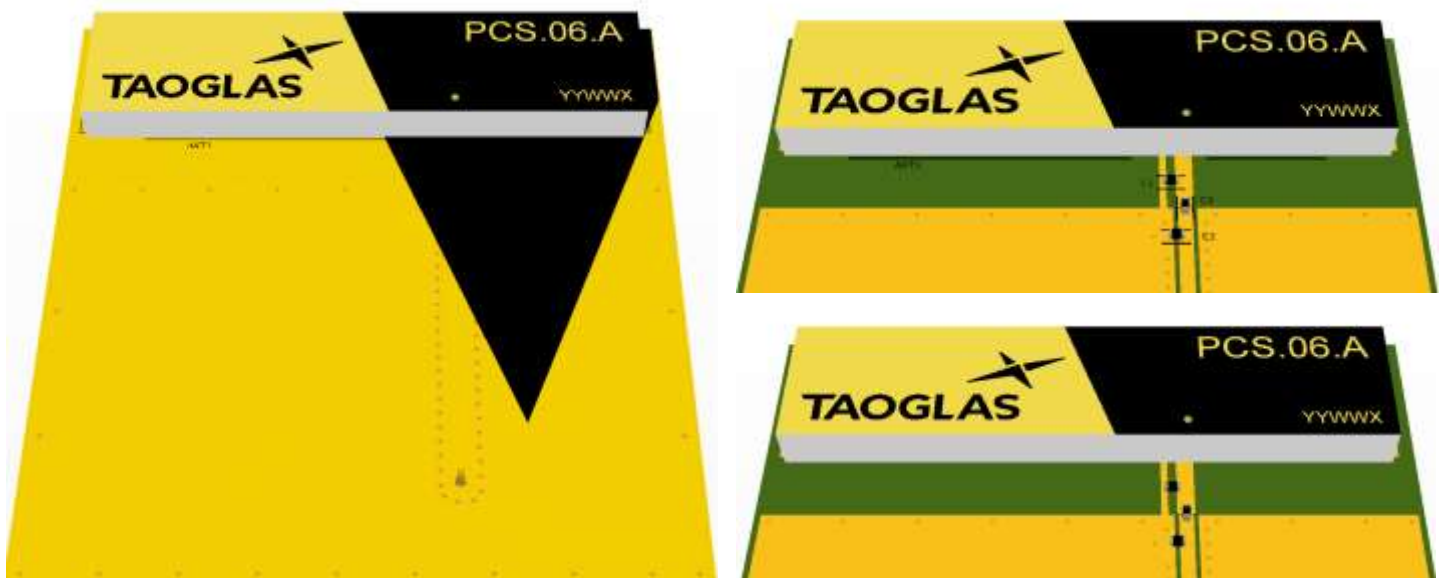

6.3 PCB Layout

The footprint and clearance on the PCB must meet the antenna specification. An example of the PCB layout shows the antenna footprint with clearance. Note the placement of the optimized components. L1 is positioned outside the ground plane and C1 is sitting across the ground plane and the copper clearance area. C2 is optional as a component but it is recommended to include these pads in case they are needed.

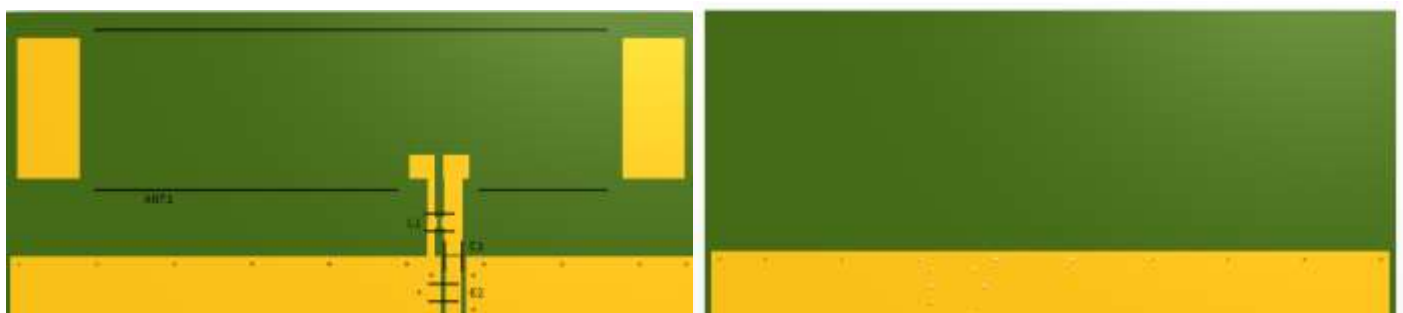


Topside


Bottom Side

6.4 PCB Clearance

Below shows the antenna footprint and clearance through ALL layers on the PCB. Only the antenna pads and connections to feed and GND are present within this clearance area (marked RED). The clearance area extends to 5mm from the antenna mechanical pads to the ground area. This clearance area includes the bottom side and ALL internal layers on the PCB.

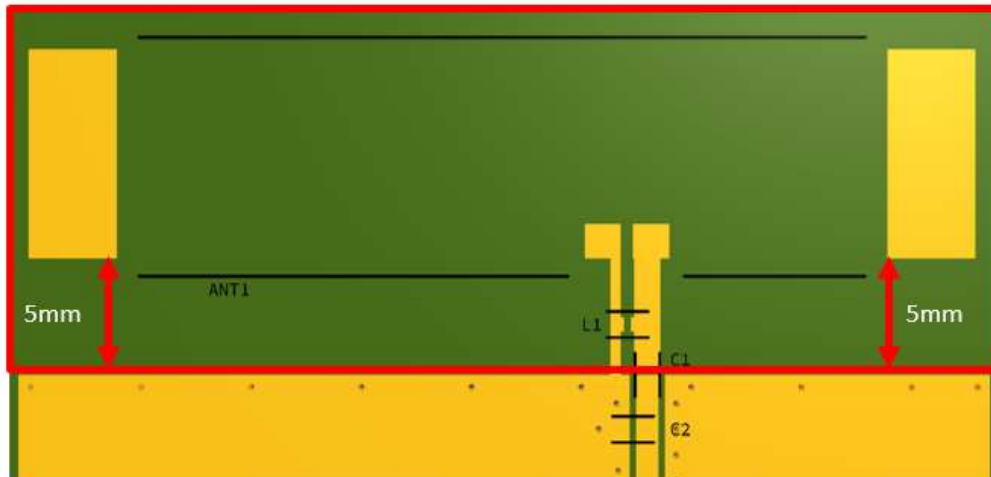


Topside

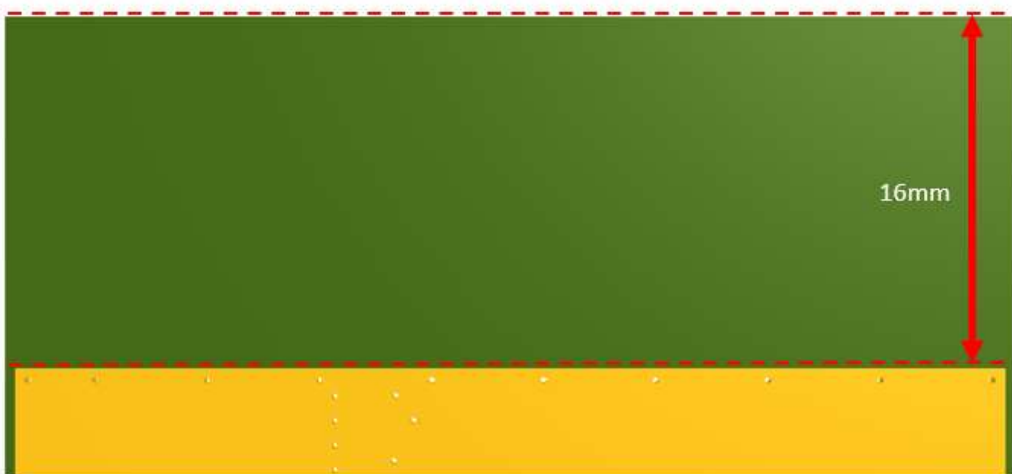


Bottom Side

6.5 Evaluation Board

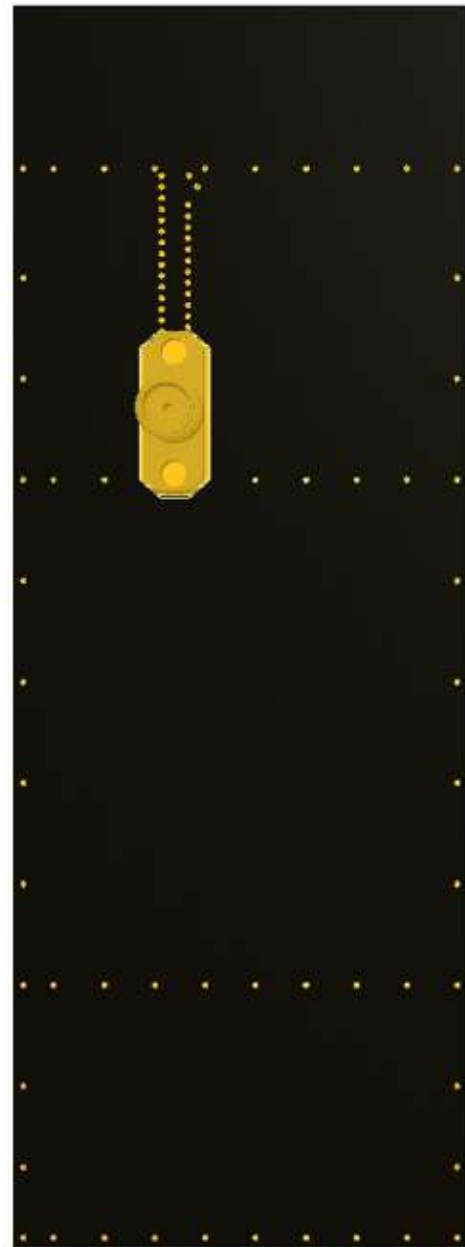


6.6 Evaluation Board Ground Plane Length

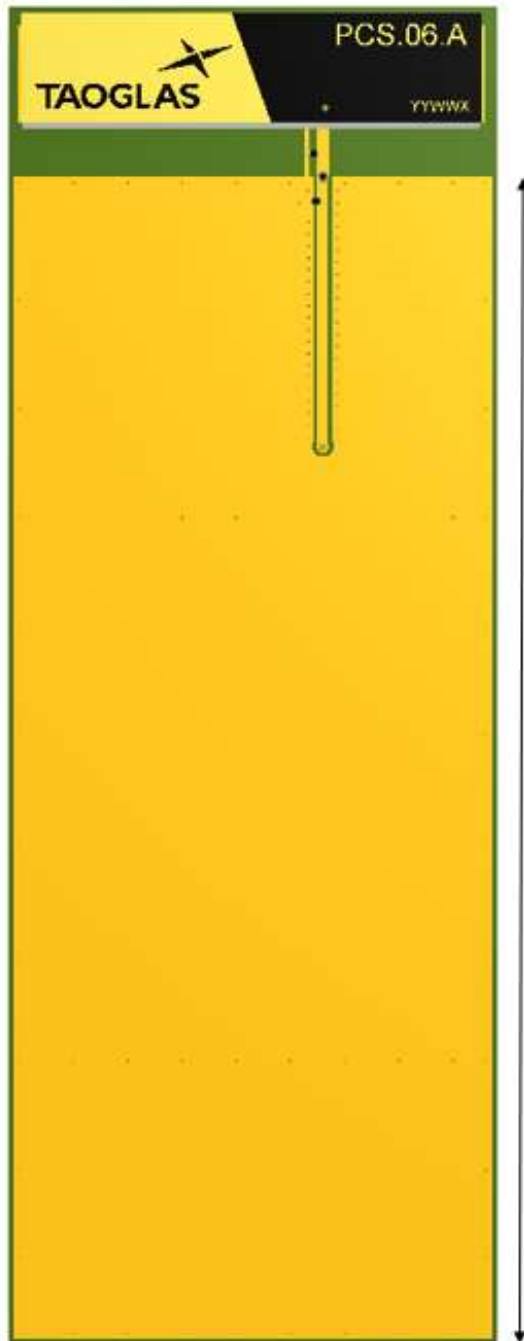

Ground Plane Length: 107mm


6.7 Evaluation Board Matching Circuit

A matching component (L1) in parallel with the PCS.06.A is required for the antenna to have optimal performance on the evaluation board, located outside of the ground plane in the space specified in the above images. C1 is also required as a matching component for this antenna. C1 is positioned sitting across the ground plane as shown in the above images. Additional matching components may be necessary for your device, so we recommend incorporating extra component footprints, forming a “pi” network, between the cellular module and the edge of the ground plane.

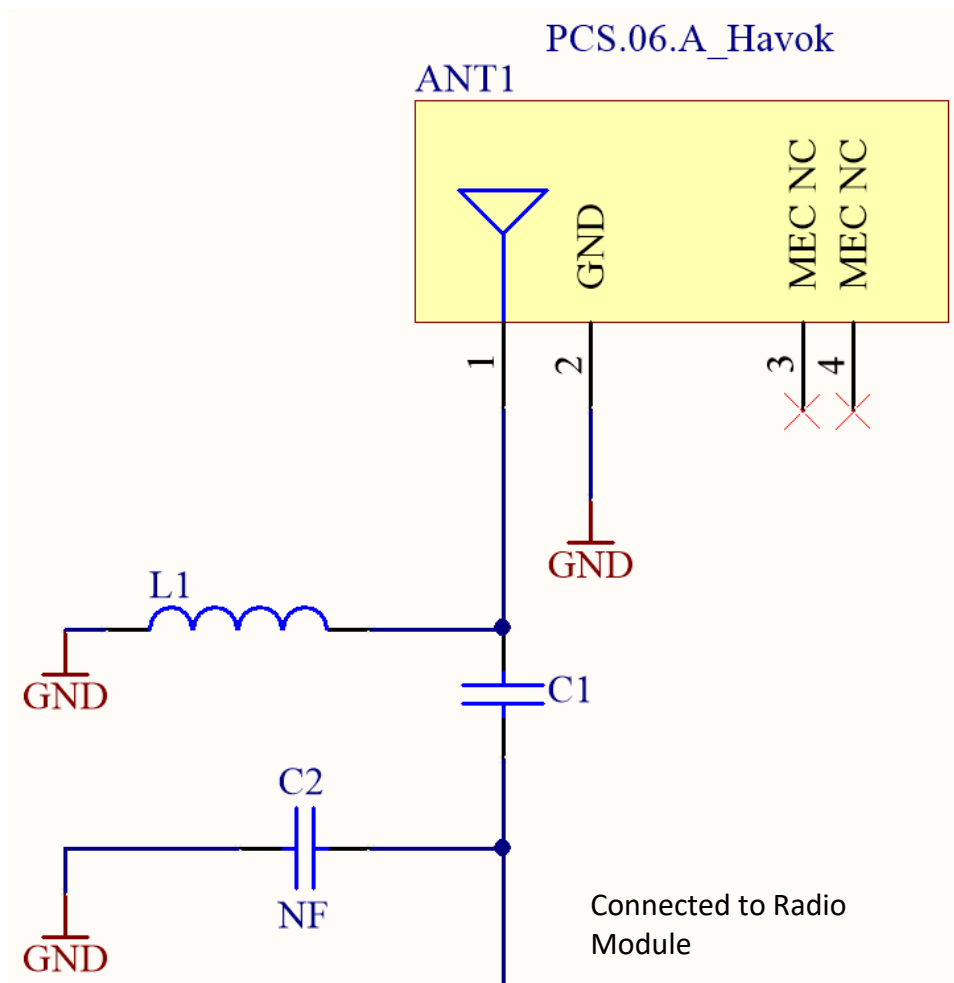

| Designator | Type | Value | Description |
|------------|-----------|------------|-----------------------|
| L1 | Inductor | 6.8nH | TDK: MLK1005S Series |
| C1 | Capacitor | 6.8pF | Murata:GRM1555 Series |
| C2 | Capacitor | Not Fitted | |

6.8 Footprint

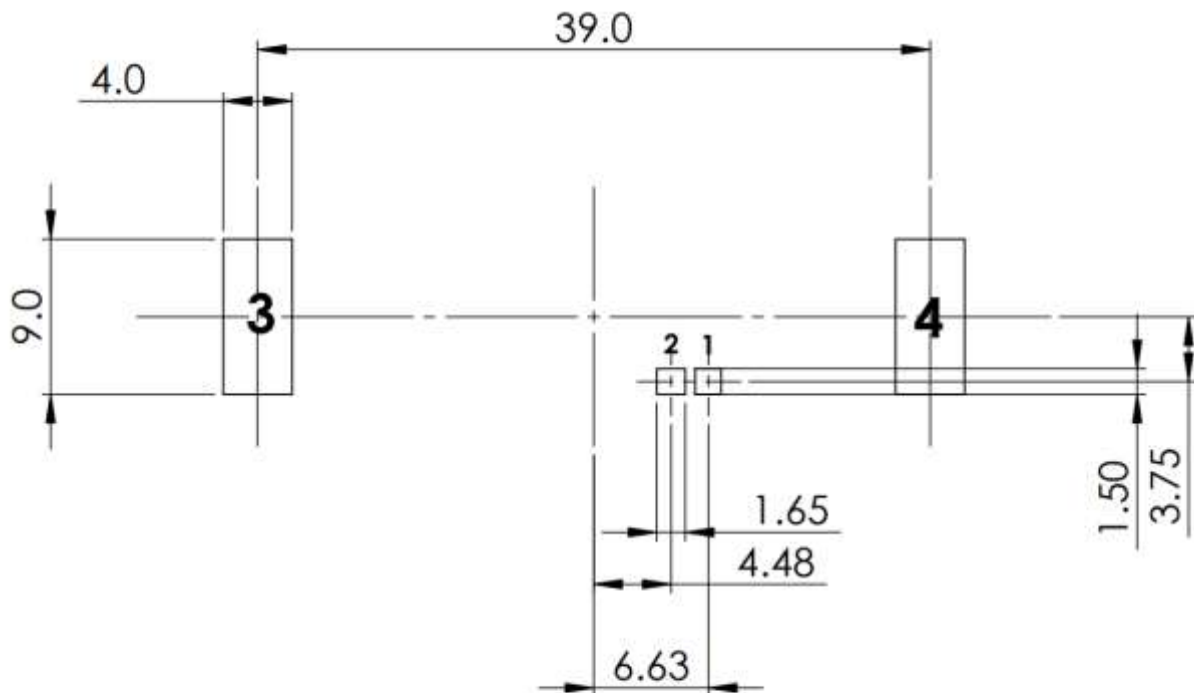


PCB FOOTPRINT


| <u>PIN:</u> | <u>DESCRIPTION:</u> |
|-------------|---------------------|
| 1 | Feed (50 ohm) |
| 2,3,4 | NC |

7. Packaging


1000 pc PCS.06.A per reel
 Dimensions - Ø330*60mm
 Weight - 3230g

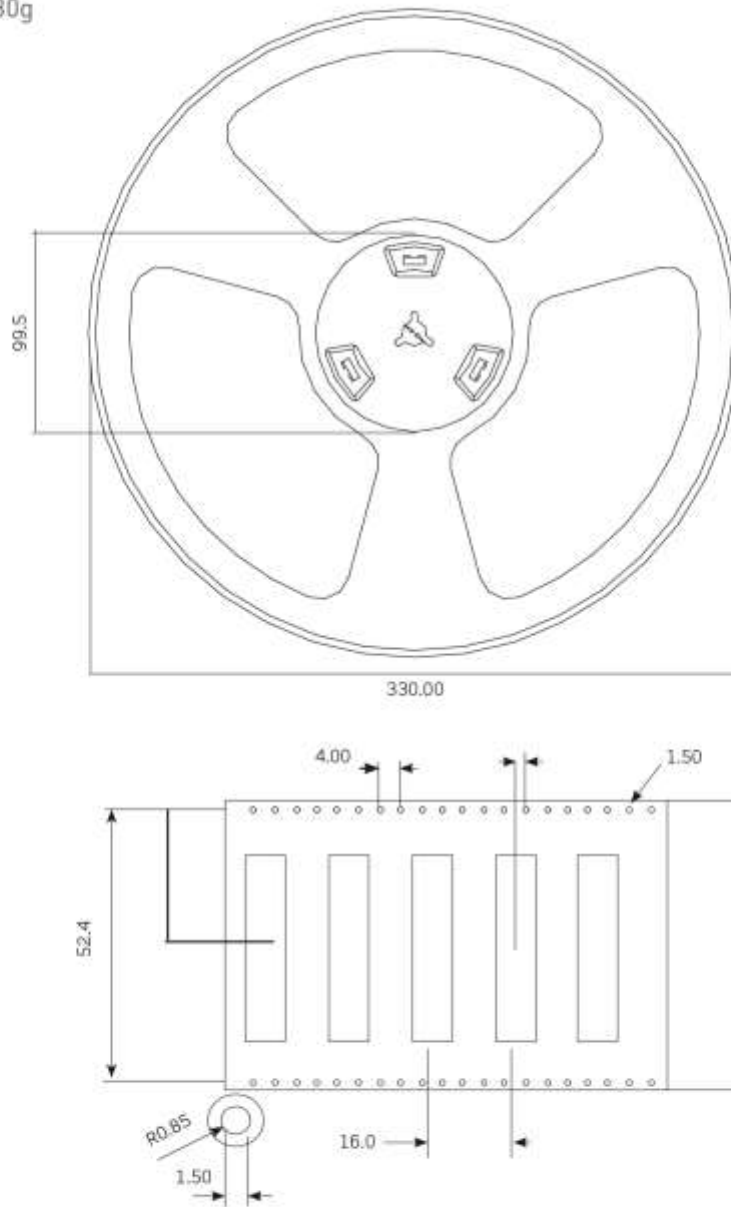


1000 pcs PCS.06.A reel
 Dimensions - 330*330*60mm
 Weight -3230g

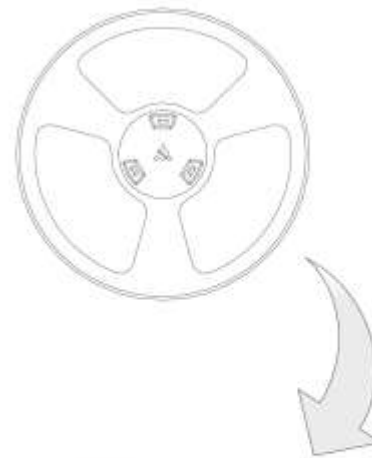


1000 pcs PCS.06.A / 1 Reel in small box
 Dimensions - 340*340*90mm
 Weight -3.5Kg

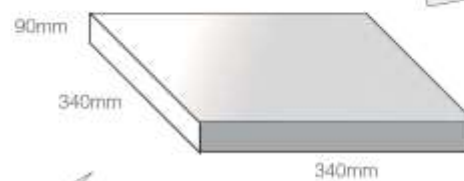

3 reels, 3000 pcs in one carton
 Carton Dimensions - 370*360*275mm
 Weight -11.3Kg

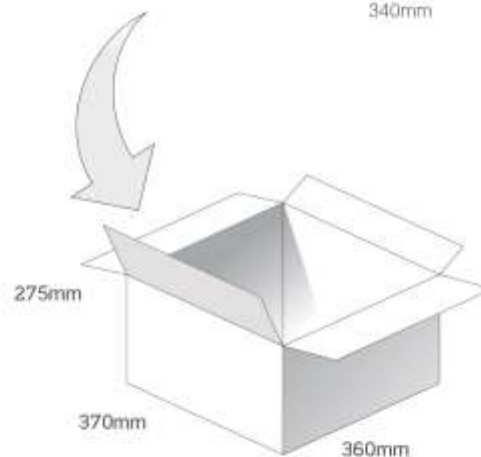

Pallet Dimensions 1200*1000*1320mm
 24 Cartons per Pallet
 6 Cartons per layer
 4 Layers

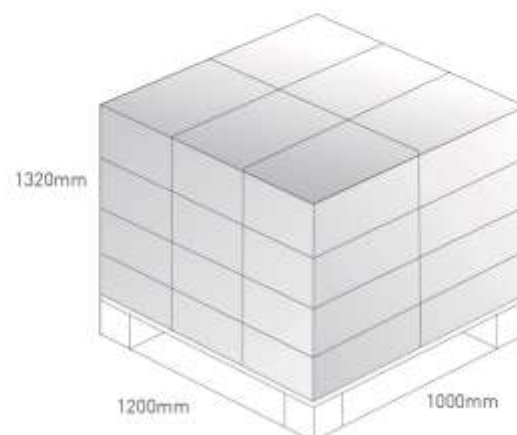

Changelog for the datasheet

SPE-13-8-070 – PCS.06.A

Revision: P (Current Version)

| | |
|------------------|------------------|
| Date: | 2021-07-09 |
| Changes: | Updated RF data. |
| Changes Made by: | Gary West |

Previous Revisions

Revision: O

| | |
|------------------|-----------------------------------------------------------------|
| Date: | 2021-02-22 |
| Changes: | Updated datasheet template and added antenna integration guide. |
| Changes Made by: | Gary West |

Revision: J

| | |
|------------------|-----------------------|
| Date: | 2017-04-28 |
| Changes: | Added LTE Band Table. |
| Changes Made by: | Peter Monahan |

Revision: N

| | |
|------------------|----------------------------------------|
| Date: | 2015-11-19 |
| Changes: | Updated Imagery Reference ECR-18-8-259 |
| Changes Made by: | Russell Meyler |

Revision: I

| | |
|------------------|------------------|
| Date: | 2017-04-14 |
| Changes: | Ammended Drawing |
| Changes Made by: | Jack Conroy |

Revision: M

| | |
|------------------|----------------------------------------------------------------------------------------|
| Date: | 2018-10-23 |
| Changes: | Did not have a description for the bottom pads, nor a diagram for connections. Amended |
| Changes Made by: | David Connolly |

Revision: H

| | |
|------------------|-----------------------|
| Date: | 2017-04-04 |
| Changes: | Added LTE Band Table. |
| Changes Made by: | Peter Monahan |

Revision: L

| | |
|------------------|----------------|
| Date: | 2018-01-30 |
| Changes: | PCN-17-8-181/A |
| Changes Made by: | Carol Faughnan |

Revision: G

| | |
|------------------|-----------------------------------------------------------------------------------|
| Date: | 2017-03-03 |
| Changes: | Updated to include disclaimer, revised packaging as per PCN and general cleaning. |
| Changes Made by: | Andy Mahoney |

Revision: K

| | |
|------------------|-------------------------------------------|
| Date: | 2017-06-09 |
| Changes: | Updated with image as per Aliss' request. |
| Changes Made by: | Andy Mahoney |

Revision: F

| | |
|------------------|--------------------|
| Date: | 2015-04-26 |
| Changes: | Comments from John |
| Changes Made by: | Aine Doyle |

| | |
|--------------------|-----------------|
| Revision: E | |
| Date: | 2015-06-30 |
| Changes: | Added Packaging |
| Changes Made by: | Aine Doyle |

| | |
|--------------------|-------------------|
| Revision: D | |
| Date: | 2015-05-19 |
| Changes: | Updated Footprint |
| Changes Made by: | Aine Doyle |

| | |
|--------------------|--------------------|
| Revision: C | |
| Date: | 2014-03-02 |
| Changes: | Added Product Name |
| Changes Made by: | Aine Doyle |

| | |
|--------------------|-------------|
| Revision: B | |
| Date: | 2014-01-16 |
| Changes: | Added Photo |
| Changes Made by: | Aine Doyle |

| | |
|------------------------------------|---------------|
| Revision: A (First Release) | |
| Date: | |
| Changes: | First Release |
| Changes Made by: | Y |



www.taoglas.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antenna Development Tools](#) category:

Click to view products by [Taoglas](#) manufacturer:

Other Similar products are found below :

[0868AT43A0020-EB1SMA](#) [EVALBGSA141MN10TOBO1](#) [A10393-U1](#) [PCSD.06.A](#) [B5771-U1](#) [KIT-LTE-GNSS-01](#) [KIT-WIFI-ISM-01](#)
[A10472-U1](#) [REFLECTOR-EVB-1](#) [A10340-U1](#) [ACAG0201-2450-EVB](#) [ACAG0301-15752450-EVB](#) [ACAG0301-1575-EVB](#) [ACAG0301-24505500-EVB](#) [ACAG0301-5500-EVB](#) [ACAG0801-2450-EVB](#) [ACAG1204-433-EVB](#) [ACAG1204-868-EVB](#) [ACAG1204-915-EVB](#)
[ACAR0301-SW2-EVB](#) [ACAR3005-C2WB-EVB](#) [ACAR3005-S824-EVB](#) [ACAR3705-S698-EVB](#) [ACAR4008-S698-EVB](#) [A10137-D](#)
[A10194-U1](#) [A10204-U1](#) [A5645H-EVB-1](#) [A5645-U1](#) [A5887H-EVB-1](#) [A6111-U1](#) [M20057-EVB-1](#) [SR42W001-U1](#) [SR42W009-U1](#)
[SR4G008-U1](#) [SR4G013-U1](#) [SR4G053-EVB-1](#) [SR4L049-EVB-1](#) [SRC5G027-U1](#) [SRCW004-U1](#) [1001312-01](#) [M310220-01](#) [M620720-01](#)
[M830120-01](#) [M830520-01](#) [EB_NN01-105A](#) [EB_NN02-201-5G](#) [CCKLTE450-NA](#) [AEK-GNCP-TH258L15](#) [MPA-104- KIT](#)