MIL-COTS 20A, 40Vdc Active EMC Filters





The FQB filter modules have been designed to reduce differential and common mode conducted emissions from dc-dc switching converters. In addition, the series contains active suppression circuitry to block input voltage surges and transients. The FQB takes advantage of TDK technologies to simplify system level compliance to MIL-STD-461, MIL-STD-1275, RTCA/DO-160 and MIL-STD-704 per MIL-HDBK-704-8. The encapsulated rugged package design and a choice of baseplate options make the modules suitable for use in a wide variety of harsh and demanding environments, including MIL-COTS.

Features	Benefits
Filtering for Compliance to MIL-STD-461(F,G)	Simplifies the system EMC filter
Input Spike and Surge Suppression per MIL-STD-1275(D,E), MIL-STD-704(A-F) and RTCA/DO-160G (Sec 16-18)	Suitable for vehicle and airborne use
High Differential and Common Mode Noise Attenuation	Reduces system EMI
-55 to 115°C Temperature Range (M-Grade)	 For operation in harsh environments
Standard (S-Grade) or Enhanced Screening (M-Grade) Options	 Reduces cost for COTS applications
Quarter Brick Size	Industry standard mounting and heatsinks

Model Selector

Model	Operating Input Voltage (Vdc)	Maximum Current (A)	Flanged Baseplate	Non-Flanged Baseplate	Standard Screening (-S)	Enhanced Screening (-M)
FQB020ADC-007-S	8.5 to +40	20	Х		Х	
FQB020ADC-N07-S	8.5 to +40	20		Х	Х	
FQB020ADC-007-M	8.5 to +40	20	Х			Х
FQB020ADC-N07-M	8.5 to +40	20		Х		Х

Screening Options		
Operation	S-Grade (Standard Screening)	M-Grade (Enhanced Screening)
Functional Test	Room and Hot Test	Cold, Room, and Hot Test
Burn in	Yes	Extended, 96 hour
Temperature Cycling	No	10 Cycles
Hi-Pot	2250VDC	2250VDC
Visual Inspection	Yes	Yes

Specifications

del


Input/OutputInput Voltage rangeInput Voltage Spike Suppression (Vin 28V, 280W)Input Voltage Surge Suppression (Vin 28V)Turn On/Off Voltage (Typical)Turn On/Off Voltage (Typical)Input Under & Over Voltage ProtectionReverse Polarity ProtectionInput Current (Maximum)Overcurrent ProtectionNo Load Input Current (Typical at 28V Input)DC Resistance (Typical)Power Loss	Vdc V V Vdc - - A A - M M W V V C c	Typically 5V devia Typically 5V deviation 47V maximum output 47V maximum output 47V maximum output wit 47V maximum output wit Module shuts dow Internal series M	Continuous: -40 to +40V. t < 1s. Varies with load, refer to input surge voltage suppression row). ation for a $\pm 250V$, 100µs, 15mJ surge per MIL-STD-1275E for a $\pm 600V$, 10µs, 50Ω source impedance per RTCA/DO-160G ut with a 60V, 550ms surge per MIL-HDBK-704-8 (Po = 280W) ut with an 80V, 80ms surge per MIL-HDBK-704-8 (Po = 280W) with an 100V, 50ms surge per MIL-STD-1275(D,E) (Po = 280W) th an 174V, 350ms surge per DEF-STAN 61-5 Part 6, (Po < 75W)" Turn on: 8.5V, turn off: 8.3V m if an input or over voltage condition occurs. Auto recovery. IOSFET is held in an off state to avoid reverse current flow 20A rent, with timed shutdown to allow module to cool. Auto restart.	
Input Voltage Spike Suppression (Vin 28V, 280W)Input Voltage Surge Suppression (Vin 28V)Turn On/Off Voltage (Typical)Input Under & Over Voltage ProtectionReverse Polarity ProtectionInput Current (Maximum)Overcurrent ProtectionNo Load Input Current (Typical at 28V Input)DC Resistance (Typical)	V V Vdc - A - MA - mA mΩ	Typically 5V devia Typically 5V deviation 47V maximum output 47V maximum output 47V maximum output wit 47V maximum output wit Module shuts dow Internal series M	t < 1s. Varies with load, refer to input surge voltage suppression row). ation for a ±250V, 100µs, 15mJ surge per MIL-STD-1275E for a ±600V, 10µs, 50Ω source impedance per RTCA/DO-160G ut with a 60V, 550ms surge per MIL-HDBK-704-8 (Po = 280W) ut with an 80V, 80ms surge per MIL-HDBK-704-8 (Po = 280W) with an 100V, 50ms surge per MIL-STD-1275(D,E) (Po = 280W) th an 174V, 350ms surge per DEF-STAN 61-5 Part 6, (Po < 75W)" Turn on: 8.5V, turn off: 8.3V In if an input or over voltage condition occurs. Auto recovery. IOSFET is held in an off state to avoid reverse current flow 20A rent, with timed shutdown to allow module to cool. Auto restart.	
(Vin 28V, 280W)Input Voltage Surge Suppression (Vin 28V)Turn On/Off Voltage (Typical)Input Under & Over Voltage ProtectionReverse Polarity ProtectionInput Current (Maximum)Overcurrent ProtectionNo Load Input Current (Typical at 28V Input)DC Resistance (Typical)	V Vdc - - A - mA mΩ	Typically 5V devia Typically 5V deviation 47V maximum output 47V maximum output 47V maximum output wit 47V maximum output wit Module shuts dow Internal series M	ation for a ±250V, 100 μ s, 15mJ surge per MIL-STD-1275E for a ±600V, 10 μ s, 50 Ω source impedance per RTCA/DO-160G ut with a 60V, 550ms surge per MIL-HDBK-704-8 (Po = 280W) ut with an 80V, 80ms surge per MIL-HDBK-704-8 (Po = 280W) with an 100V, 50ms surge per MIL-STD-1275(D,E) (Po = 280W) th an 174V, 350ms surge per DEF-STAN 61-5 Part 6, (Po < 75W)" Turn on: 8.5V, turn off: 8.3V m if an input or over voltage condition occurs. Auto recovery. IOSFET is held in an off state to avoid reverse current flow 20A rent, with timed shutdown to allow module to cool. Auto restart.	
(Vin 28V, 280W)Input Voltage Surge Suppression (Vin 28V)Turn On/Off Voltage (Typical)Input Under & Over Voltage ProtectionReverse Polarity ProtectionInput Current (Maximum)Overcurrent ProtectionNo Load Input Current (Typical at 28V Input)DC Resistance (Typical)	V Vdc - - A - mA mΩ	Typically 5V deviation 47V maximum outpu 47V maximum output 47V maximum output 47V maximum output wit 47V maximum output wit Module shuts dow Internal series M	for a ±600V, 10µs, 50Ω source impedance per RTCA/DO-160G ut with a 60V, 550ms surge per MIL-HDBK-704-8 (Po = 280W) ut with an 80V, 80ms surge per MIL-HDBK-704-8 (Po = 280W) with an 100V, 50ms surge per MIL-STD-1275(D,E) (Po = 280W) th an 174V, 350ms surge per DEF-STAN 61-5 Part 6, (Po < 75W)" Turn on: 8.5V, turn off: 8.3V rn if an input or over voltage condition occurs. Auto recovery. IOSFET is held in an off state to avoid reverse current flow 20A rent, with timed shutdown to allow module to cool. Auto restart.	
Input Voltage Surge Suppression (Vin 28V)Turn On/Off Voltage (Typical)Input Under & Over Voltage ProtectionReverse Polarity ProtectionInput Current (Maximum)Overcurrent ProtectionNo Load Input Current (Typical at 28V Input)DC Resistance (Typical)	Vdc - - A - mA mΩ	47V maximum outpu 47V maximum outpu 47V maximum output 47V maximum output wit 47V maximum output wit Module shuts dow Internal series M	ut with a 60V, 550ms surge per MIL-HDBK-704-8 (Po = 280W) ut with an 80V, 80ms surge per MIL-HDBK-704-8 (Po = 280W) with an 100V, 50ms surge per MIL-STD-1275(D,E) (Po = 280W) th an 174V, 350ms surge per DEF-STAN 61-5 Part 6, (Po < 75W)" Turn on: 8.5V, turn off: 8.3V In if an input or over voltage condition occurs. Auto recovery. IOSFET is held in an off state to avoid reverse current flow 20A rent, with timed shutdown to allow module to cool. Auto restart.	
(Vin 28V) Turn On/Off Voltage (Typical) Input Under & Over Voltage Protection Reverse Polarity Protection Input Current (Maximum) Overcurrent Protection No Load Input Current (Typical at 28V Input) DC Resistance (Typical)	Vdc - - A - mA mΩ	47V maximum output 47V maximum output 47V maximum output wit 47V maximum output wit Module shuts dow Internal series M	ut with an 80V, 80ms surge per MIL-HDBK-704-8 (Po = 280W) with an 100V, 50ms surge per MIL-STD-1275(D,E) (Po = 280W) th an 174V, 350ms surge per DEF-STAN 61-5 Part 6, (Po < 75W)" Turn on: 8.5V, turn off: 8.3V In if an input or over voltage condition occurs. Auto recovery. IOSFET is held in an off state to avoid reverse current flow 20A rent, with timed shutdown to allow module to cool. Auto restart.	
Turn On/Off Voltage (Typical)Input Under & Over Voltage ProtectionReverse Polarity ProtectionInput Current (Maximum)Overcurrent ProtectionNo Load Input Current (Typical at 28V Input)DC Resistance (Typical)	- Α - mA mΩ	47V maximum output v 47V maximum output wit Module shuts dow Internal series M Limits the output curr	with an 100V, 50ms surge per MIL-STD-1275(D,E) (Po = 280W) th an 174V, 350ms surge per DEF-STAN 61-5 Part 6, (Po < 75W)" Turn on: 8.5V, turn off: 8.3V in if an input or over voltage condition occurs. Auto recovery. IOSFET is held in an off state to avoid reverse current flow 20A rent, with timed shutdown to allow module to cool. Auto restart.	
Input Under & Over Voltage Protection Reverse Polarity Protection Input Current (Maximum) Overcurrent Protection No Load Input Current (Typical at 28V Input) DC Resistance (Typical)	- Α - mA mΩ	47V maximum output wit Module shuts dow Internal series M Limits the output curr	th an 174V, 350ms surge per DEF-STAN 61-5 Part 6, (Po < 75W)" Turn on: 8.5V, turn off: 8.3V In if an input or over voltage condition occurs. Auto recovery. IOSFET is held in an off state to avoid reverse current flow 20A rent, with timed shutdown to allow module to cool. Auto restart.	
Input Under & Over Voltage Protection Reverse Polarity Protection Input Current (Maximum) Overcurrent Protection No Load Input Current (Typical at 28V Input) DC Resistance (Typical)	- Α - mA mΩ	Module shuts dow Internal series M Limits the output curr	Turn on: 8.5V, turn off: 8.3V in if an input or over voltage condition occurs. Auto recovery. IOSFET is held in an off state to avoid reverse current flow 20A rent, with timed shutdown to allow module to cool. Auto restart.	
Input Under & Over Voltage Protection Reverse Polarity Protection Input Current (Maximum) Overcurrent Protection No Load Input Current (Typical at 28V Input) DC Resistance (Typical)	- Α - mA mΩ	Internal series M Limits the output curr	n if an input or over voltage condition occurs. Auto recovery. IOSFET is held in an off state to avoid reverse current flow 20A rent, with timed shutdown to allow module to cool. Auto restart.	
Reverse Polarity ProtectionInput Current (Maximum)Overcurrent ProtectionNo Load Input Current (Typical at 28V Input)DC Resistance (Typical)	- mA mΩ	Internal series M Limits the output curr	IOSFET is held in an off state to avoid reverse current flow 20A rent, with timed shutdown to allow module to cool. Auto restart.	
Input Current (Maximum) Overcurrent Protection No Load Input Current (Typical at 28V Input) DC Resistance (Typical)	- mA mΩ	Limits the output curr	20A rent, with timed shutdown to allow module to cool. Auto restart.	
Overcurrent Protection No Load Input Current (Typical at 28V Input) DC Resistance (Typical)	- mA mΩ		rent, with timed shutdown to allow module to cool. Auto restart.	
No Load Input Current (Typical at 28V Input) DC Resistance (Typical)	mΩ			
DC Resistance (Typical)	mΩ	3mA. 1.5	EmA if module is turned off using the remate as left	
, . . ,			5mA if module is turned off using the remote on/off.	
Power Loss	W -		Positive leg: $25m\Omega$, negative leg: $5m\Omega$	
	-		Typically 12.5W at 20A	
Remote On/Off		Module is ON when Pin 2 is left open; off when Pin 2 is connected to Pin 3 (-Vin)		
DC Good / Fault Signal	-	Open collector signal, low = Good		
Output Capacitance	uF		uF maximum. Contact factory for higher values.	
Differential Mode Attenuation at 300kHz	dB		β (typical with a 50Ω source & load impedance)	
Common Mode Attenuation at 1MHz	dB	30dB (typical with a 50 Ω source & load impedance)		
Qualification Methods	-	Consistent with MIL-STD-883F and MIL-STD-202G		
			(Tested to the most stringent listed)	
	Radiate	-	Navy	
	Emission		10kHz to 18GHz Fixed Wing internal, >25m Nose to Tail	
	Conducte		Surface ships and submarines	
Compliance Testing (2)	Emissior		Basic Curve	
	• • • •	CS101	Curve 2, Imax=10A	
	Conducte		Curve 5	
51	Susceptibi	-	Basic Test Signal	
Safaty Aganay Cartificationa		CS116	10kHz to 100MHz EC/UL/CSA/EN62368-1, 60950-1, CE Mark	
Safety Agency Certifications Environmental	-	IC	C/UL/CSA/EIN02300-1, 00950-1, CE Mark	
Operating Baseplate Temperature (max) ⁽¹⁾	°C	Standard screening / S	S): -10° C to $\pm 115^{\circ}$ C. Enhanced screening (M): -55° C to $\pm 115^{\circ}$ C	
Storage Temperature	°C	Standard screening (-S): -40°C to +115°C, Enhanced screening (-M): -55°C to +115°C -65 to 125°C		
	%RH	-65 to 125°C MIL-STD 883 Method 1004.7		
• • • •				
	-			
Other				
	g		100g (Flanged version)	
	mm	Flanged version:		
	Inches			
	Hours	50°C ambient, full load: 11,000,000 hours		
Warranty	. 10010	3		
Vibration Shock Other Weight (Typ) Size (LxWxH) Size (LxWxH)	- g mm Inches	Conduction, convection or forced air Terminals to Case: 2250Vdc MIL-STD-202G, Method 201A, Unpowered, sweep 1: 5 to 50 Hz at 0.5g, sweep 2: 50 to 500 Hz at 1.5g, three axis MIL-STD-202G, Method 213B, Table 213-1, Test Condition I, Unpowered, 50G half sine 6ms, three axis 100g (Flanged version) Flanged version: 60.6 x 55.9 x 12.7, Non-flanged version: 60.6 x 39 x 12.7 Flanged version: 2.39 x 2.2 x 0.5", Non-flanged version: 2.39 x 1.54 x 0.5" 50°C ambient, full load: 11,000,000 hours		


Notes

See website for detailed specifications, test methods and installation manual


 See thermal performance section
 Tested using TDK-Lambda evaluation kit containing FQB020ADC-007-S transient filter, combined with HQA2W120W280V-007-S and HQA2W120W050V-007-S power modules and a 200W resistive load.

Thermal Performance

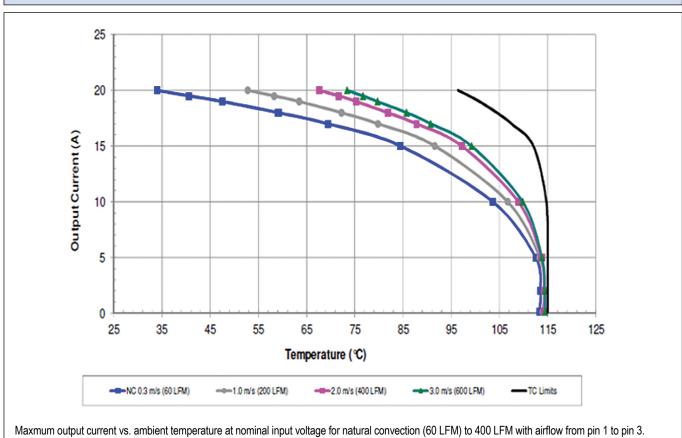

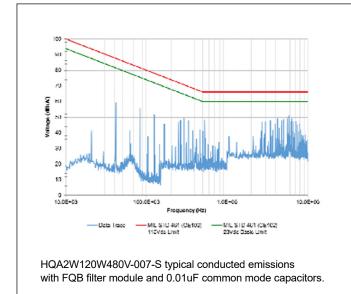


Attenuation Characteristics



HQA2W120W280V-007-S typical conducted emissions with FQB filter module and 0.01uF common mode capacitors.




Outline Drawing

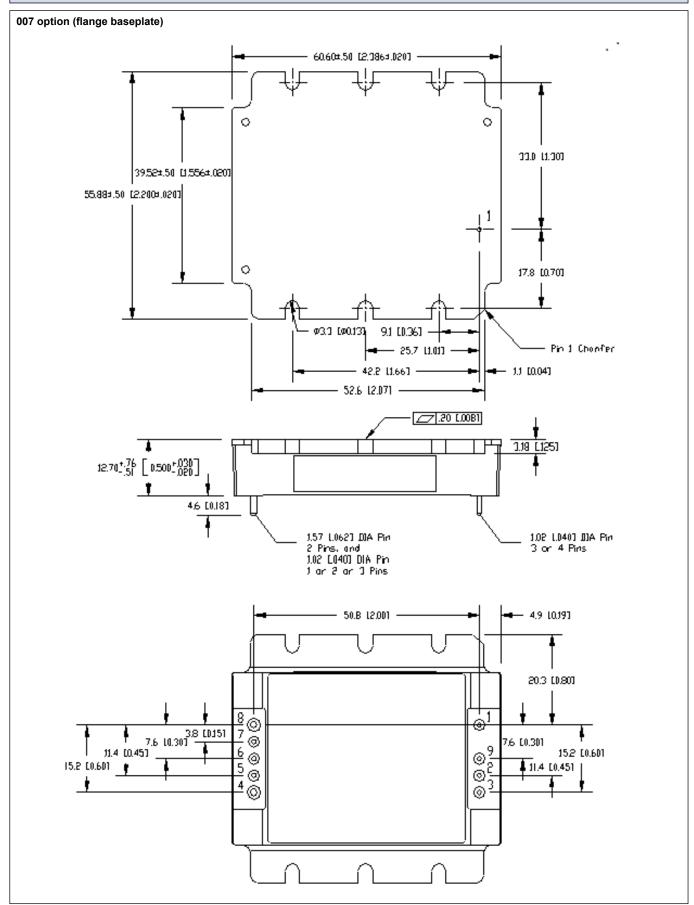



Outline Drawing

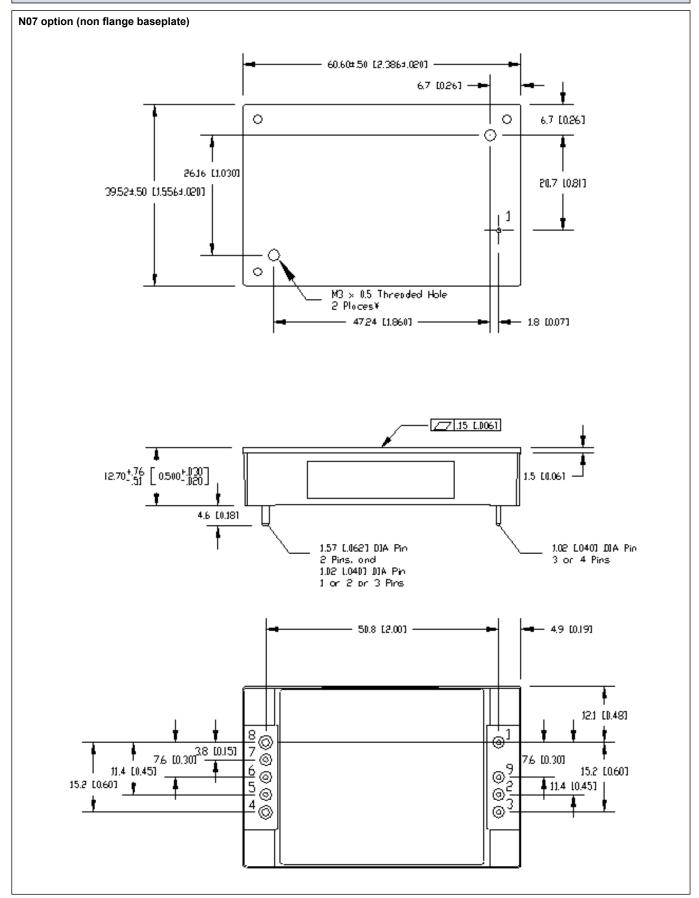

Trusted • Innovative • Reliable



Pinout	
PIN	Function
1	VIN (+)
2	ON / OFF
3	VIN (-)
4	VOUT (-)
5	No connection
6	Common mode out*
7	DC Good / Fault
8	VOUT (+)
9	COM (IN)*

* In a typical application pin 6 would be connected to the Vout-/ground plane and pin 9 to chassis/ground for EMI measurement

Evaluation Board

Evaluation Board Part #	Content
FQX-HQA-EVK-D0	Evaluation PCB that can accommodate FQA or FQB filters plus two (2) HQA DC-DC Quarter Brick Modules. Filters and DC-DC bricks are not included.







info@nl.tdk-lambda.com www.emea.lambda.tdk.com/nl

TDK-Lambda France SAS

Tel: +33 1 60 12 71 65

france@fr.tdk-lambda.com

www.emea.lambda.tdk.com/fr

www.emea.lambda.tdk.com/it

TDK-Lambda Germany GmbH Tel: +49 7841 666 0 info.germany@de.tdk-lambda.com www.emea.lambda.tdk.com/de

Austria Sales Office Tel: +43 2256 655 84 info@at.tdk-lambda.com www.emea.lambda.tdk.com/at

Switzerland Sales Office Tel: +41 44 850 53 53

info@ch.tdk-lambda.com www.emea.lambda.tdk.com/ch

Nordic Sales Office Tel: +45 8853 8086 info@dk.tdk-lambda.com

www.emea.lambda.tdk.com/dk

TDK-Lambda UK Ltd. Tel: +44 (0) 12 71 85 66 66 powersolutions@uk.tdk-lambda.com www.emea.lambda.tdk.com/uk



ŵ

TDK-Lambda Ltd.

Tel: +9 723 902 4333 info@tdk-lambda.co.il www.emea.lambda.tdk.com/il



C.I.S.

Commercial Support: Tel: +7 (495) 665 2627 Technical Support: Tel: +7 (812) 658 0463 info@tdk-lambda.ru www.emea.lambda.tdk.com/ru



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324 powersolutions@us.tdk-lambda.com www.us.lambda.tdk.com

TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599 sales.br@tdk-electronics.tdk.com www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation Tel: +81-3-6778-1113 www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd. Tel: +86 21 6485-0777 powersolutions@cn.tdk-lambda.com www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd. Tel: +65 6251 7211

tls.mkt@sg.tdk-lambda.com www.sg.lambda.tdk.com

www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division Tel: +91 80 4039-0660 mathew.philip@in.tdk-lambda.com

For Additional Information, please visit https://product.tdk.com/info/en/products/emc/power-line/catalog.html



FQB_260704 December 11th, 2020 V2

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Power Line Filters category:

Click to view products by TDK-Lambda manufacturer:

Other Similar products are found below :

6609019-3 6609026-5 6609030-6 6609973-2 D30A 7-1609090-5 F2810 F4456A F7382Z F7863Z FAHAV3100ZC000 806276 FN2020B-1-06 FN2080B-10-06 FN2410H-32-33 FN2410H-80-34 FP144 FS4153-20-06 FS4353-500-99 12-MMB-030-11-D DB4-393 15811T200 20B1 LC630 2B1 1609080-2 1609993-8 1-6609070-1 F1100AA02 F1150CC10 F1500CA10 F1500CA15 F4041Z F7585E 1B1 FN2070A-16-06 FN2090A-20-06 FN2090B-12-06 FN2090Z-1-06 FN2410H-25-33 FN2410H-60-34 FN2410H-8-44 FN2412H-8-44 FN323B-6-01 FN3258H-130-35 FN610R-3-06 20EHQ7 20EHZ7 20K1 30B6