


## FPCAP Functional Polymer Aluminum Solid Electrolytic Capacitors

**S6 series**

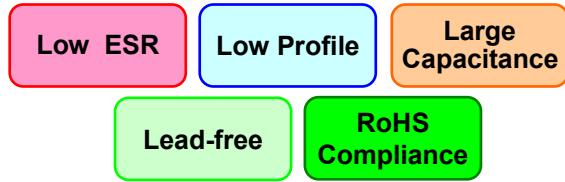

### ● Features

By using Functional Polymer cathode, Frequency & Temp. characteristics are greatly improved.

- Low ESR at a high frequency range.
- High ripple current capability.
- Long life and high reliability.



### ● Applications

- Switching Power Supply and DC/DC Converter.
- Back up Power Supplies of CPU(VRM etc.)
- Miniature high Power Supply.

### ● Environmental Correspondence

Corresponding to Lead-free, RoHS compliance and Halogen-free.

- The Lead-free of terminal plating (Sn)


### ● Specifications

Items	Characteristics	
	<b>S6</b>	
Operating Temp. Range	-55 to +105°C	
Rated Voltage Range	2.5 to 25 V-DC	
Capacitance Range	33 to 560 $\mu$ F	
Capacitance Tolerance	$\pm 20\%$ (M)	
Endurance	Condition	105°C 2000Hrs at rated voltage
	Capacitance	Within $\pm 20\%$ of the value before test
	Leakage Current	Not to exceed the value specified
	$\tan \delta$	Not to exceed 150% of the value specified
Failure Rate	0.1% / 1000Hrs. Max (60%CL)	

### ● Size List

	[ $\phi D \times L$ ]			
R.V (S.V.) M	2.5 (2.8)	10 (11.5)	16 (18.4)	25 (28.7)
Cap. [ $\mu$ F]				6.3×5
33				6.3×5
100			6.3×6	
150		6.3×5		
560	6.3×5			

### ● Dimensions


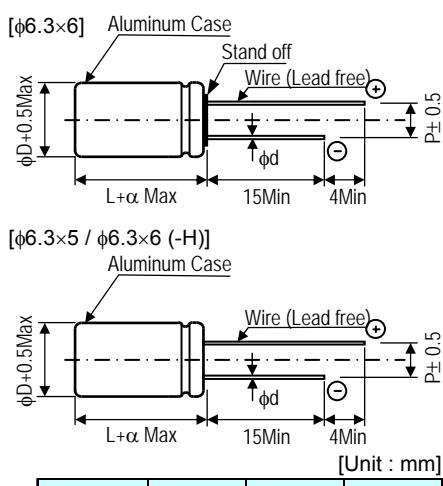


## ● Part number & Specifications

Rated Voltage (V)	Rated Capacitance ( $\mu\text{F}$ , 120Hz)	Part Number		Leakage Current * ( $\mu\text{A}$ , 2 min)	$\tan\delta$ (120Hz)	ESR (m $\Omega$ , 100kHz)	Rated Ripple Current (mA, r.m.s.)	Case Size $\phi D \times L (\text{mm})$
		NICHICON	FPCAP					
2.5	560	RS60E561MCN1□□	FP-2R5RE561M-S6□□	700	0.12	13	3600	6.3 × 5
10	150	RS61A151MCN1□□	FP-010RE151M-S6□□	450	0.10	25	2500	6.3 × 5
16	100	RS61C101MDS1□□	FP-016RE101M-S6□□	500	0.10	24	2490	6.3 × 6
16	100	RS61C101MCS1□□	FP-016RE101M-S6□□-H	500	0.10	24	2490	6.3 × 6
25	33	RS61E330MCN1□□	FP-025RE330M-S6□□	165	0.10	60	1700	6.3 × 5


\* In case of some doubt about measured values, measure after applying rated voltage for 120 minutes at 105°C.

## ● Frequency Characteristics

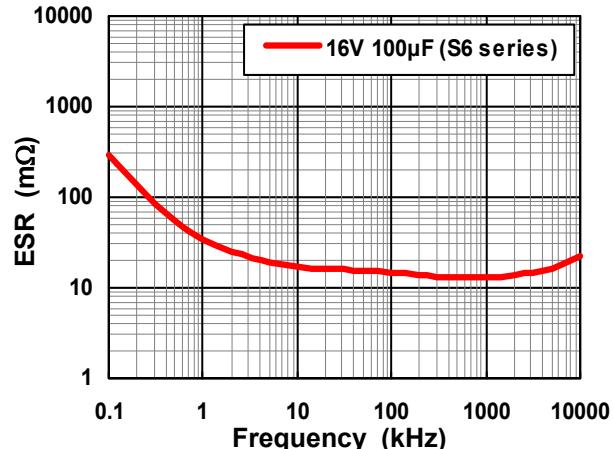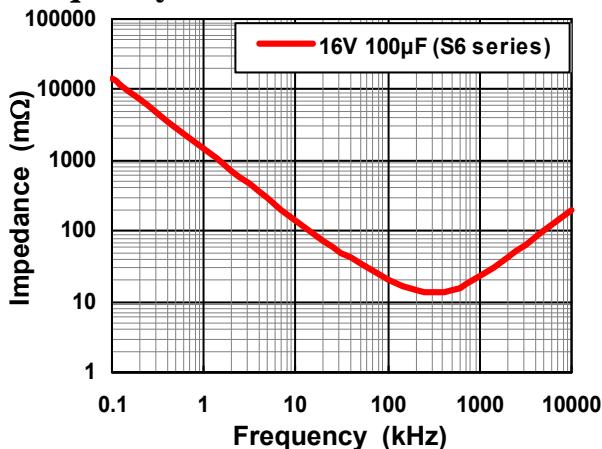


## ● Part Number (EX) 16V, 100 $\mu\text{F}$ Flat rubber Type (-H)

Nichicon P/N

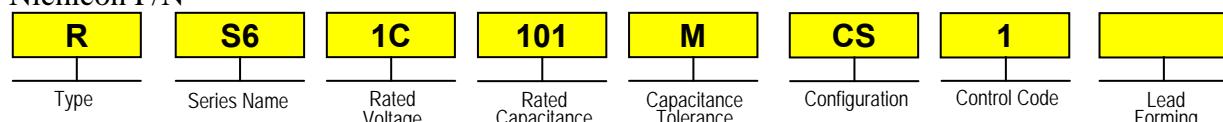

{ CG: Cut lead (Bulk)  
JT :  $\phi 6.3 \times 5/6$ , 2.5mm pitch taping  
PX :  $\phi 6.3$  5.0mm pitch taping }

FPCAP P/N

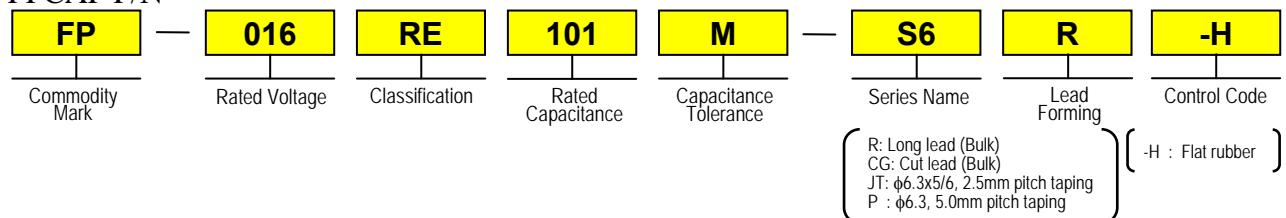

{ R: Long lead (Bulk)  
CG: Cut lead (Bulk)  
JT :  $\phi 6.3 \times 5/6$ , 2.5mm pitch taping  
P :  $\phi 6.3$ , 5.0mm pitch taping } { -H : Flat rubber }

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:***

***Click to view products by Nichicon manufacturer:***

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)