


REV	DESCRIPTION	BY	DATE	ECO NO.
E	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/06/11	33971
FINISH SEE SPECIFICATIONS				
MATERIAL SEE SPECIFICATIONS				
RELATED DOCUMENTS 1. 2. 3. 4.				
3RD ANGLE PROJECTION				
THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				
DRAFT CMB DATE 108/09/00 DSGN SCALE 1=1.0 UNIT OF MEASUREMENT MILLIMETER [INCH]				
CONTACT TURCK FOR MORE INFORMATION REFERENCE ONLY ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY				
DO NOT SCALE THIS DRAWING FILE: 777000664 SHEET 1 OF 1				

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

NOTES:


CABLE LENGTH TOLERANCE	STRIIP LENGTH TOLERANCE
+ 4% (OR 50mm) OF LENGTH	±0.5mm
- 0% (OR 0mm) OF LENGTH	±1.0mm
WHICHEVER IS GREATER	±2.0mm
	±3.0mm
	±4.0mm
	±5.0mm
	±6.0mm
	±7.0mm
	±8.0mm
	±9.0mm
	±10.0mm
	±11.0mm
	±12.0mm
	±13.0mm
	±14.0mm
	±15.0mm
	±16.0mm
	±17.0mm
	±18.0mm
	±19.0mm
	±20.0mm
	±21.0mm
	±22.0mm
	±23.0mm
	±24.0mm
	±25.0mm
	±26.0mm
	±27.0mm
	±28.0mm
	±29.0mm
	±30.0mm
	±31.0mm
	±32.0mm
	±33.0mm
	±34.0mm
	±35.0mm
	±36.0mm
	±37.0mm
	±38.0mm
	±39.0mm
	±40.0mm
	±41.0mm
	±42.0mm
	±43.0mm
	±44.0mm
	±45.0mm
	±46.0mm
	±47.0mm
	±48.0mm
	±49.0mm
	±50.0mm
	±51.0mm
	±52.0mm
	±53.0mm
	±54.0mm
	±55.0mm
	±56.0mm
	±57.0mm
	±58.0mm
	±59.0mm
	±60.0mm
	±61.0mm
	±62.0mm
	±63.0mm
	±64.0mm
	±65.0mm
	±66.0mm
	±67.0mm
	±68.0mm
	±69.0mm
	±70.0mm
	±71.0mm
	±72.0mm
	±73.0mm
	±74.0mm
	±75.0mm
	±76.0mm
	±77.0mm
	±78.0mm
	±79.0mm
	±80.0mm
	±81.0mm
	±82.0mm
	±83.0mm
	±84.0mm
	±85.0mm
	±86.0mm
	±87.0mm
	±88.0mm
	±89.0mm
	±90.0mm
	±91.0mm
	±92.0mm
	±93.0mm
	±94.0mm
	±95.0mm
	±96.0mm
	±97.0mm
	±98.0mm
	±99.0mm
	±100.0mm

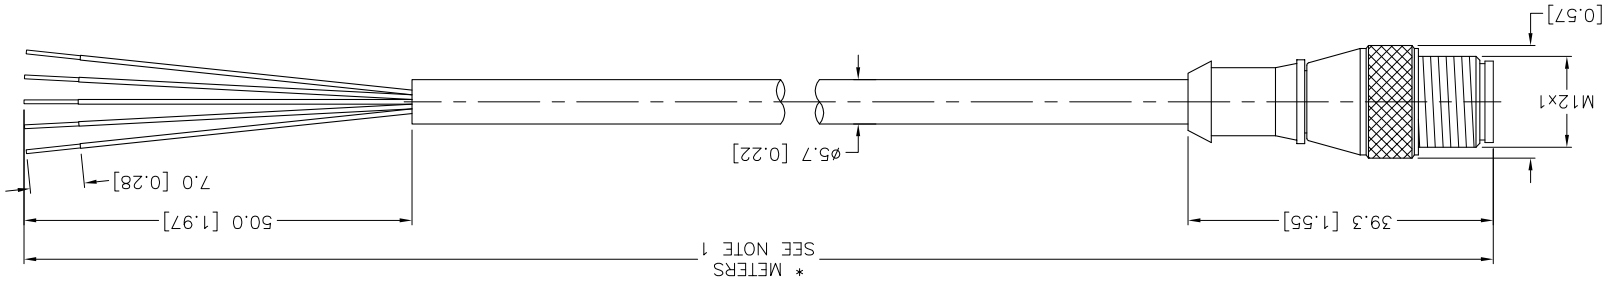

SOURCE DRAWING - FOR REFERENCE ONLY

CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	5x22 AWG
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

SPECIFICATIONS

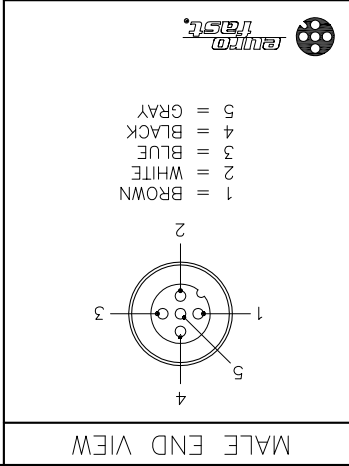

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [turck](#) manufacturer:

Other Similar products are found below :

[BI10-M30-AP6X-H1141](#) [BI2-G12-AZ33X-7M](#) [BS4151-0/13.5](#) [NI12U-G18-ADZ30X2-B1331](#) [NI12U-M18-AN4X](#) [BI1.5-G08K-AN6X](#) [BI5-G18-AZ3X](#) [BI5-G18-AZ3X-B1331-50MM](#) [VB20](#) [B 5143-0](#) [BMWS 8151-0/9](#) [BI30U-CK40-AP6X2-H1141](#) [NI12U-M18-AP6X-H1141](#) [NI4U-EG08-AN6X-H1341](#) [BS 4151-0/9](#) [NI5-G12-AP6X-H1141](#) [NI14-G18-ADZ30X2](#) [FEN20-4DIP-4DXP-DIN](#) [BC10-QF5.5-RN6X2](#) [PKG 3M-4/S90](#) [FCS-N1/2A4P-AP8X-H1141](#) [FKFD 4.5](#) [RK40-2M](#) [BI5-G18-AP6X-B1441/S34](#) [NI3-EG08K-Y1-H1341](#) [RI360P0-QR24M0-INCRX2-H1181](#) [BCF5-S18-RP4X/S90](#) [BI5-M18-Y0X-H1141](#) [NI35U-CK40-ADZ30X2-B3131 W/BS4](#) [WK 4T-2](#) [IM1-22EX-T](#) [RK 4T-10](#) [BI 2-EG08K-AP6X-V1131](#) [NI12U-MT18-AP4X-H1141](#) [BI1.5-EG08-AP6X-H1341](#) [BC 5-Q08-AP6X2-V1131](#) [BC5-S18-Y1X](#) [CT 2-A30/M](#) [C10-T13X/024VDC](#) [FDN20-4S-4XSG-E](#) [FKV-CC](#) [FSFD 8](#) [CMBS 8141-0](#) [BI10-M30-AN6X-H1141](#) [CMB 8151-0](#) [WK 4.5T-2/S618](#) [VB80-P7X9-8/CS12](#) [FKFD 8](#) [NI4U-EG08-RP6X-V1131](#) [PKW 3M-6](#)